


LED FREE DOT SYSTEM


NRP-FTB0851 Series


IP20



Model No	P (W)	CCT	Beam Angle	Total Lumen	LM/W	Dimensions in mm			
						A	B	C	
NRP-FTB0851-6-30K-BK-120D	6W	3000K	120°	480lm	80lm/w	300	32.5	122	0.23
NRP-FTB0851-6-40K-BK-120D	6W	4000K	120°	660lm	110lm/w	300	32.5	122	0.23
NRP-FTB0851-15-30K-BK-120D	15W	3000K	120°	1200lm	80lm/w	890	32.5	122	0.37
NRP-FTB0851-15-40K-BK-120D	15W	4000K	120°	1875lm	125lm/w	890	32.5	122	0.37

Dimensions in mm

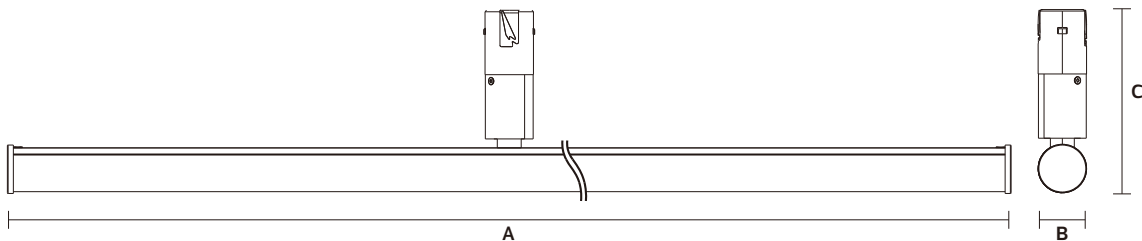

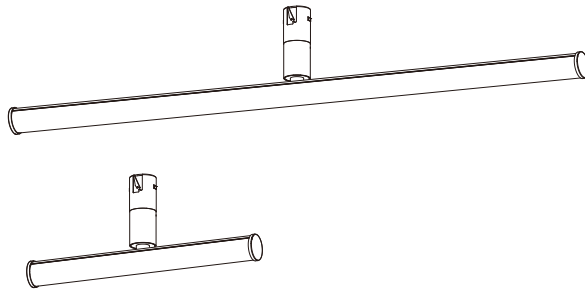


Description:
LED FREE DOT SYSTEM

Main material:
Aluminum + PC

Specification:
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
Build-in LED Driver

Applications
.Office
.Meeting room
.Sitting room

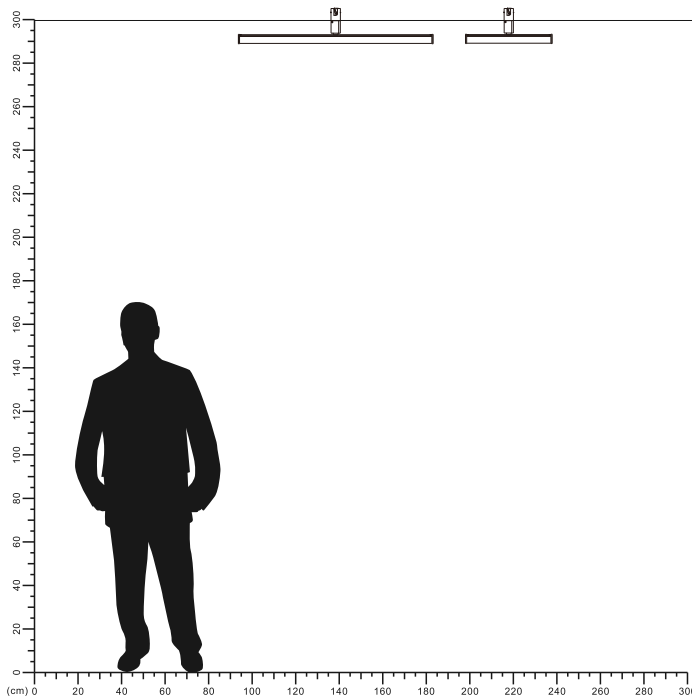





LED FREE DOT SYSTEM


NRP-FD-BASE
IP20




Model No	Materials	Hole Size (mm)	 kg
NRP-FD-TRM-70	Aluminum +PC	Φ50mm	0.1
NRP-FD-BASE-60	Aluminum +PC	Φ50mm	0.1
NRP-FD-TRM-90-A	Aluminum	Φ50mm	0.027
NRP-FD-TRM-90-B	Aluminum+PC	NRP-FD-TRM-90-A (Matching)	0.09

*Suitable for constant voltage DC48V power supply only

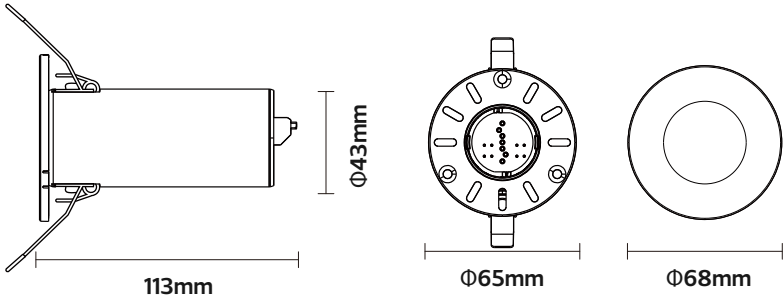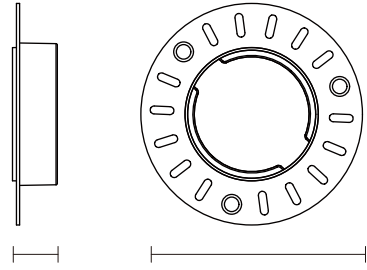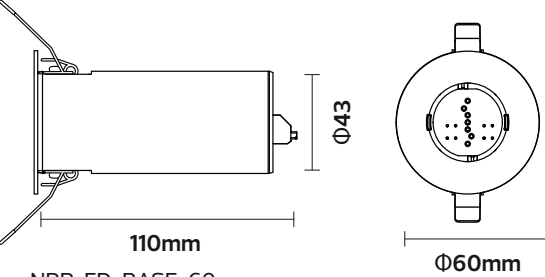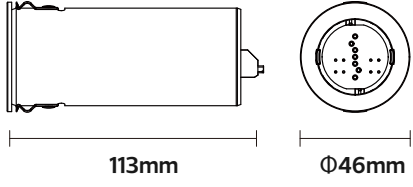Dimensions in mm  NRP-FD-TRM-70		 NRP-FD-TRM-90-A	
 NRP-FD-BASE-60		 NRP-FD-TRM-90-B	

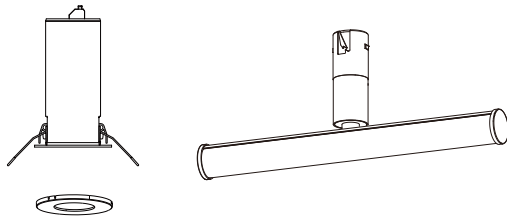


NRP-FD-TRM-70
NRP-FD-BASE-60

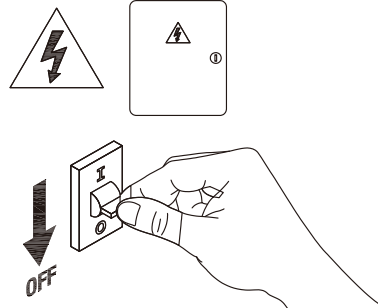


1

Turn off the power




2

Cut two $\Phi 50$ hole in the ceiling

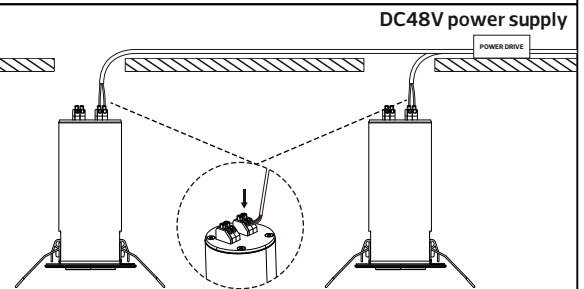


3

Press the button to insert the cable

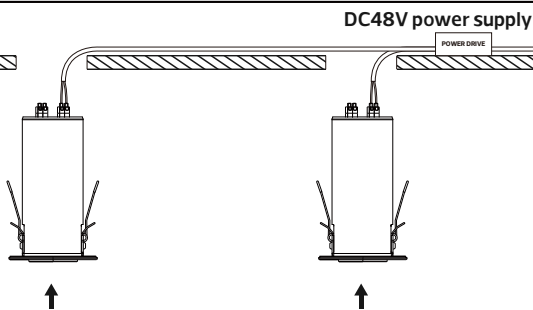


4

Buckle automatically fall down

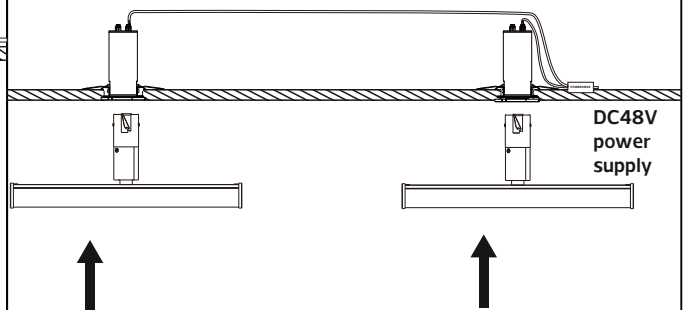


5

Push the lamp body stuck into the base (push the lamp body can be removed)

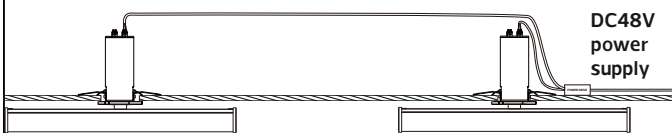


6

Installation complete

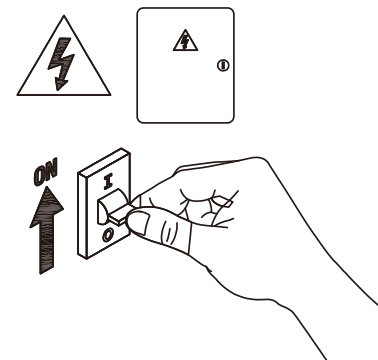

7



Turn on power

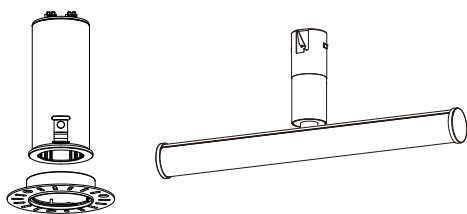

NRP-FD-TRM-90-B
NRP-FD-TRM-90-A

1

Cut two $\Phi 50$ hole in the ceiling

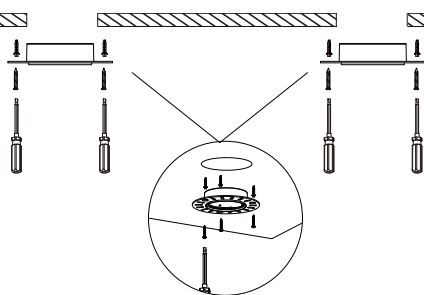



2

Fixed base

3

Press the button to insert the cable

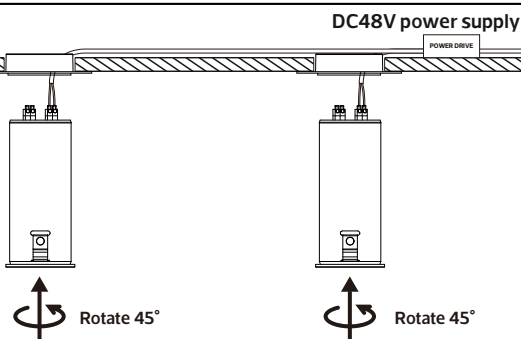
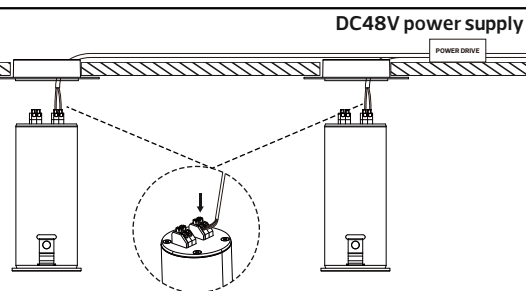


4

Mount the base to the fixing bracket

5

Push the lamp body stuck into the base to fix
(push the lamp body can be removed)

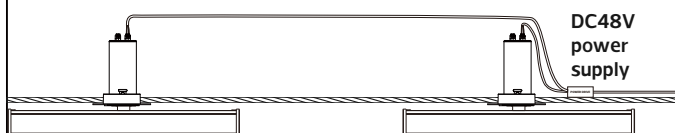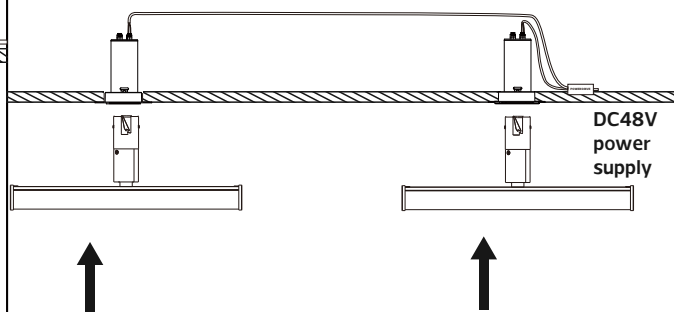

6

Installation complete

7

Turn on power

