





LED Downlight


NRP-IRDL0108-13 Series
IP20



Item Code	P (W)	Beam Angle	Output (lm)	lm/w	Color	Dimensions in mm			
						A	B	C	
NRP-IRDL0108-13-30K-BK-15D	13W	15°	1040lm	80lm/w	Gold	Φ57	59	50	0.21
NRP-IRDL0108-13-30K-BK-24D	13W	24°	1040lm	80lm/w	Gold	Φ57	59	50	0.21
NRP-IRDL0108-13-30K-BK-36D	13W	36°	1040lm	80lm/w	Gold	Φ57	59	50	0.21
NRP-IRDL0108-13-30K-BK-50D	13W	50°	1040lm	80lm/w	Gold	Φ57	59	50	0.21

Dimensions in mm

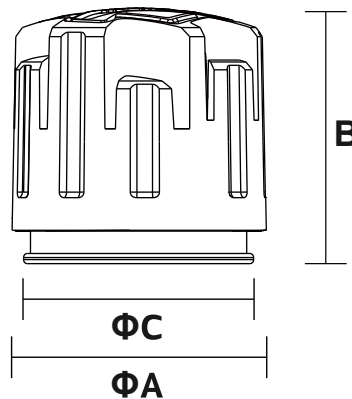

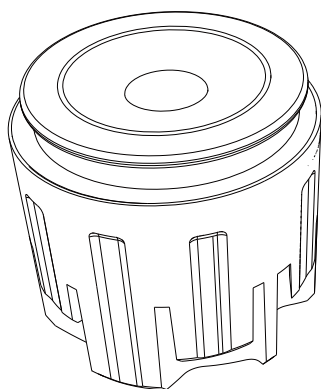

Description:

LED Downlight

Main material:

Aluminum+PC

Specification

Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
LED driver is included
IP20

Applications

- . Shopping mall
- . Office buildings
- . Exhibition hall

