






## GU10 LED Lamp


NRP-12W-9530



| Item Code    | P (W) | Total Lumen | Beam angle | lm/w | CCT   | Dimensions in mm<br>A B |    | Lamp Type | kg   |
|--------------|-------|-------------|------------|------|-------|-------------------------|----|-----------|------|
| NRP-12W-9530 | 12    | 1080        | 60°        | 90   | 3000K | Φ50                     | 80 | GU10      | 0.07 |
| NRP-12W-9540 | 12    | 1080        | 60°        | 90   | 4000K | Φ50                     | 80 | GU10      | 0.07 |
| NRP-12W-9565 | 12    | 1080        | 60°        | 90   | 6500K | Φ50                     | 80 | GU10      | 0.07 |

### Dimensions in mm

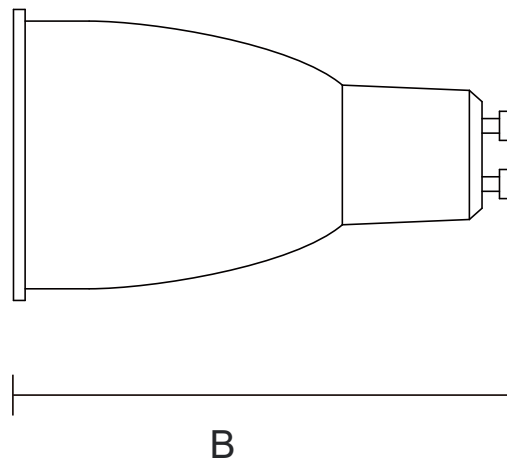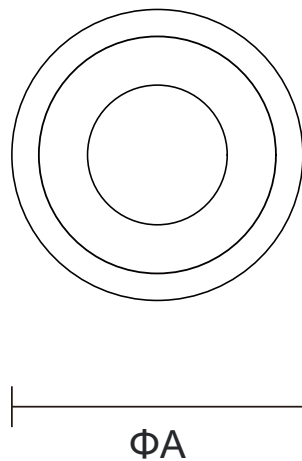


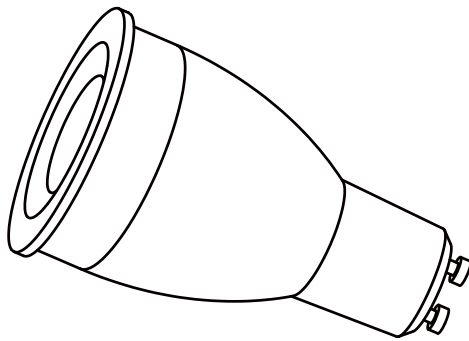



**Description:**  
GU10 LED Lamp

**Main material:**  
PC+Aluminum+Nylon

**Specification**  
Energy saving, up to 85% energy saving  
comparing to standard halogen and incandescent  
lamps  
High quality light, high color rendering, less heat,  
no UV or IR radiation  
Build-in LED Driver  
IP20


**Applications**  
.Shoping mall  
.Hotels  
.Exhibition hall  
.Art hall  
.Museums

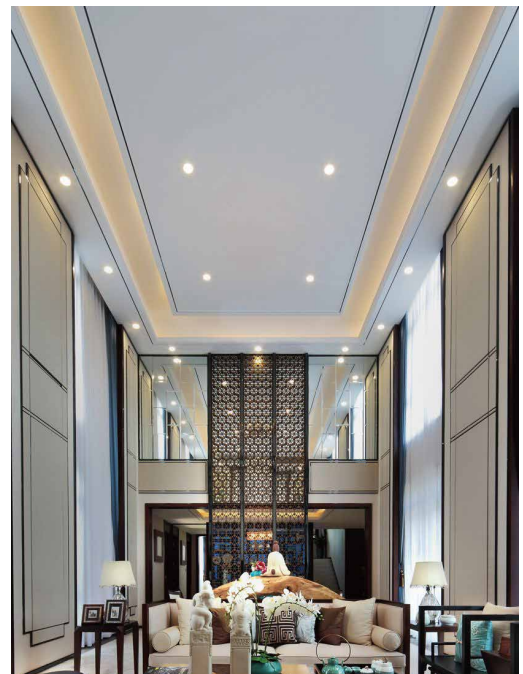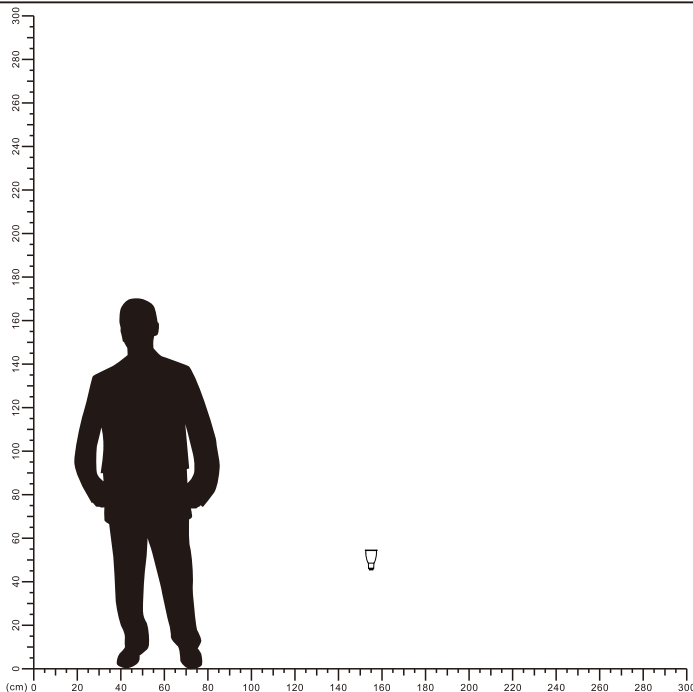

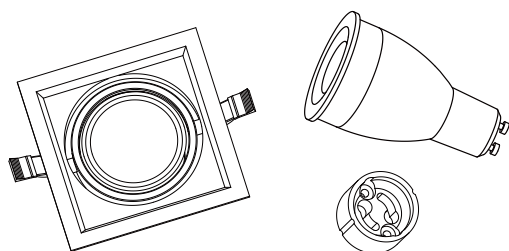


**1**

Turn off The Power

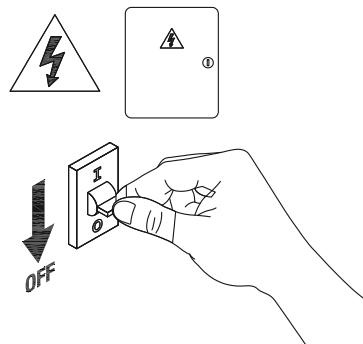


**2**

Cut a hole in the ceiling




**3**

Snap the LED cup into the outer ring




**4**

Snap the LED cup into the Lamp cup base




**5**

Buckle automatically fall down



**6**

installaion is complete



**7**

Turn on the power

