





LED Magnetic Track System



NR-M2P0251 Series
IP20

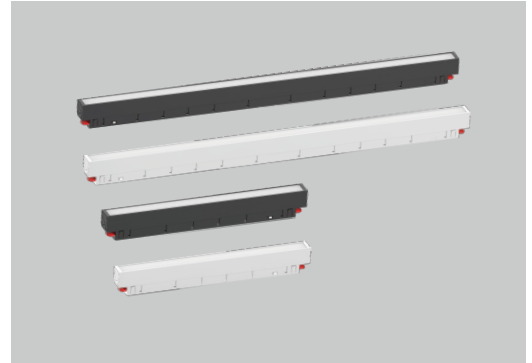

Model No	P(W)	CCT(K)	Output (lm)	lm/w	Color	Dimensions in mm			kg
						A	B	C	
NR-PL105-10 SW	10	2700	680	68	Black	295	23	43	0.2
NR-M2P0251-10-30K-BK-100D	10	3000	710	71	Black	295	23	43	0.2
NR-M2P0251-10-40K-BK-100D	10	4000	710	71	Black	295	23	43	0.2
NR-M2P0251-10-30K-WH-100D	10	3000	850	85	White	295	23	43	0.2
NR-M2P0251-10-40K-WH-100D	10	4000	710	71	White	295	23	43	0.2
NR-M2P0251-15-27K-BK-100D	15	2700	1110	74	Black	582	23	43	0.34
NR-M2P0251-15-30K-BK-100D	15	3000	1200	80	Black	582	23	43	0.34
NR-M2P0251-15-40K-BK-100D	15	4000	1155	77	Black	582	23	43	0.34
NR-M2P0251-15-30K-WH-100D	15	3000	1200	80	White	582	23	43	0.34
NR-M2P0251-15-40K-WH-100D	15	4000	1200	80	White	582	23	43	0.34

Dimensions in mm

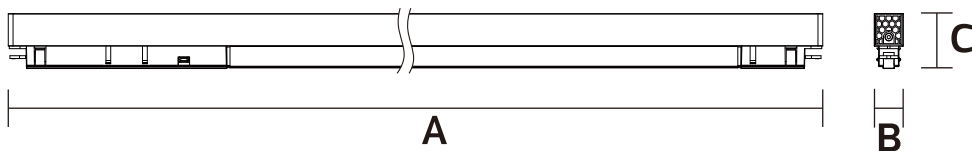

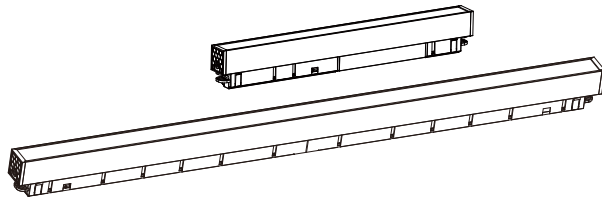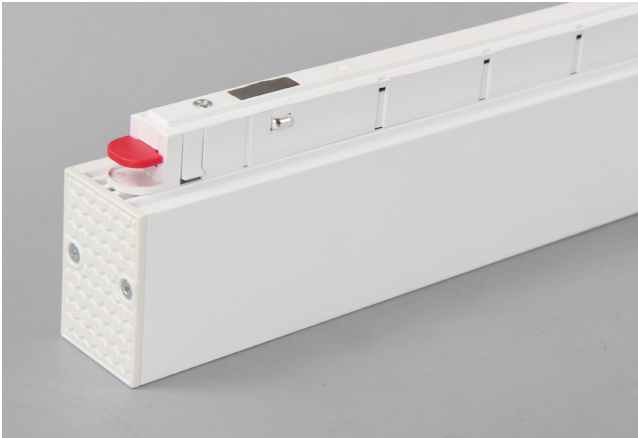


Description:
LED Magnetic Track System

Main material:
Aluminum+Pc




Specification:
Aluminum lamp body integrated die-casting molding, spraying process, fine work, waterproof and dustproof. High light transmission PC material lamp shade, bright and not dazzling, anti-aging, long service life. IP20

Applications
.Office
.Meeting room
.Sitting room

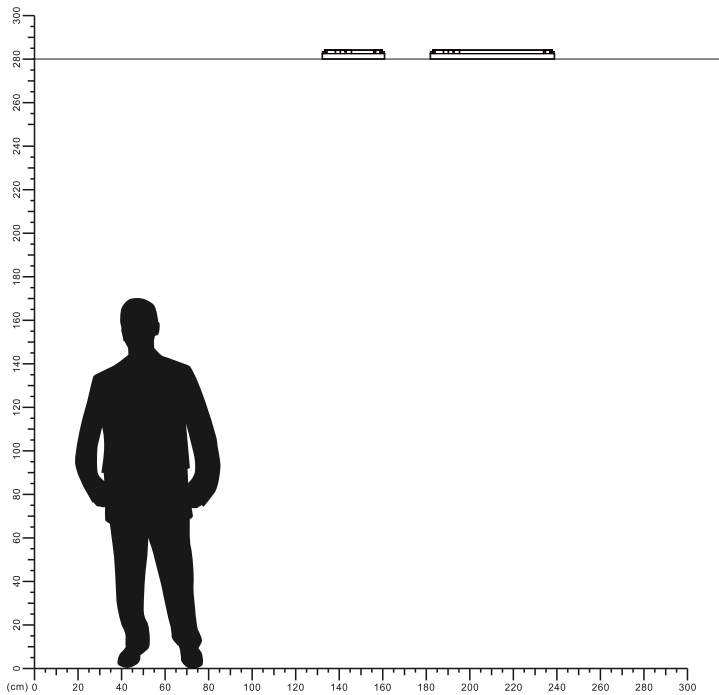


Magnetic Track System Power Supply

NR-S20-S35-PS-48V-100-DIM
IP20




Model No	P(W)	Input	Output	Dimensions in mm			
				A	B	C	
NR-S20-S35-PS-48V-100-DIM	100	AC220-240V	DC48V 2.1A	260	30	48	0.7

Dimensions in mm

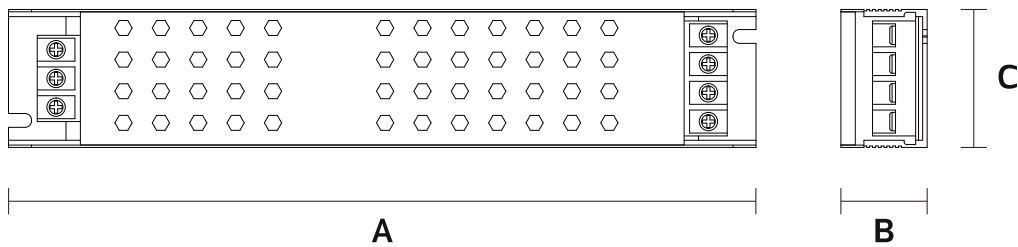


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

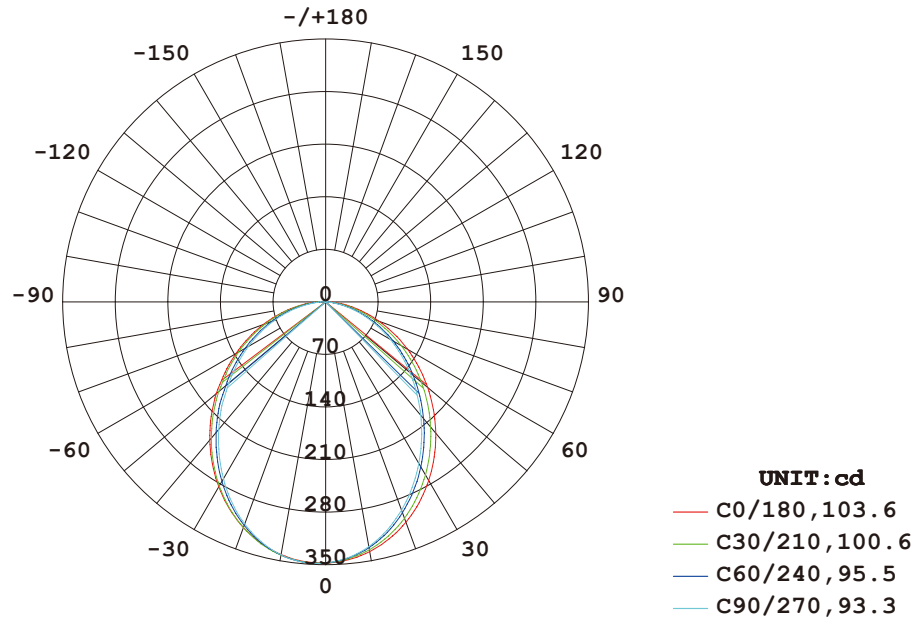


AVERAGE BEAM ANGLE (50%) : 98.3 DEG

Illuminance at a Distance

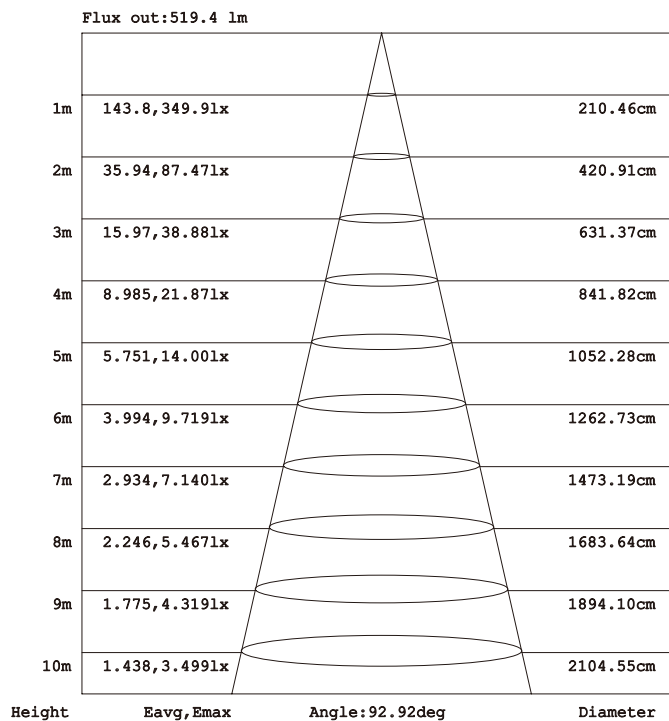




LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

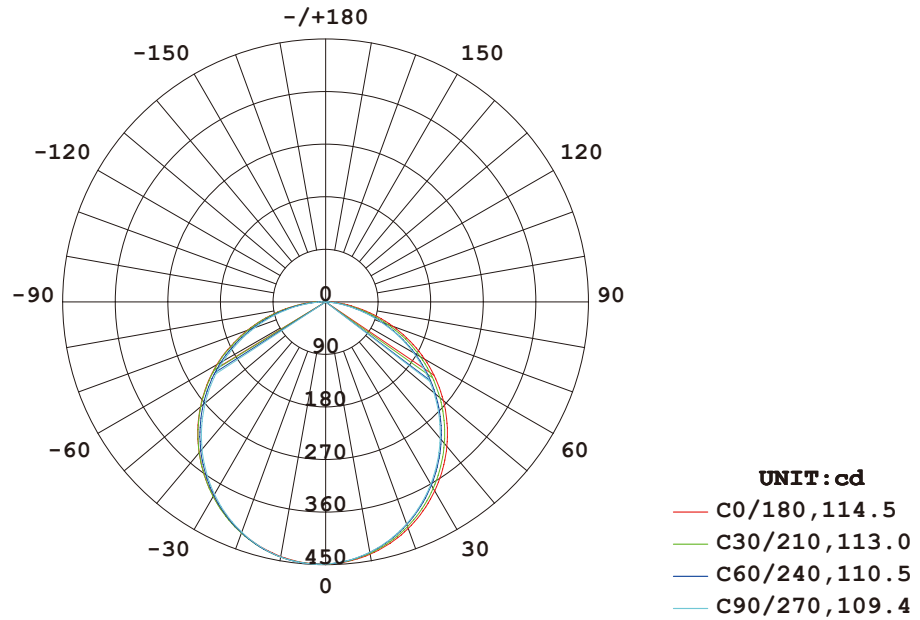

AVERAGE BEAM ANGLE (50%) : 111.8 DEG


Illuminance at a Distance

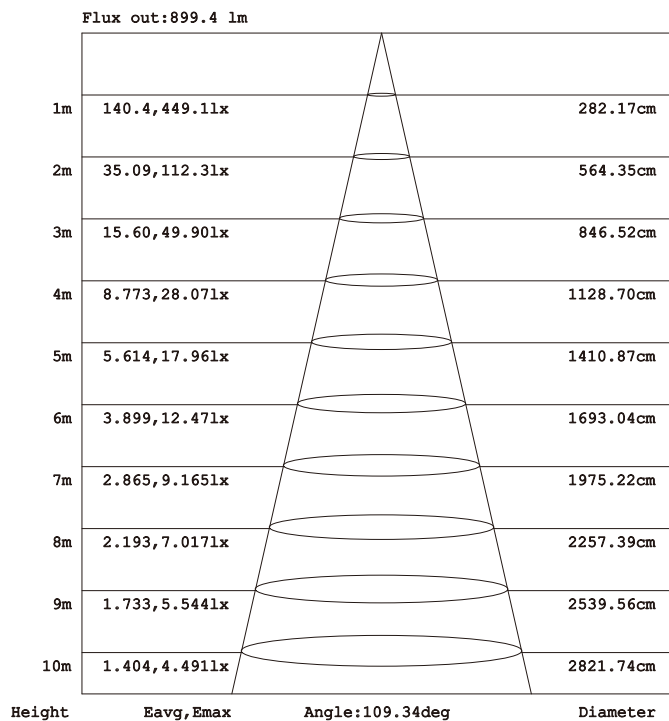

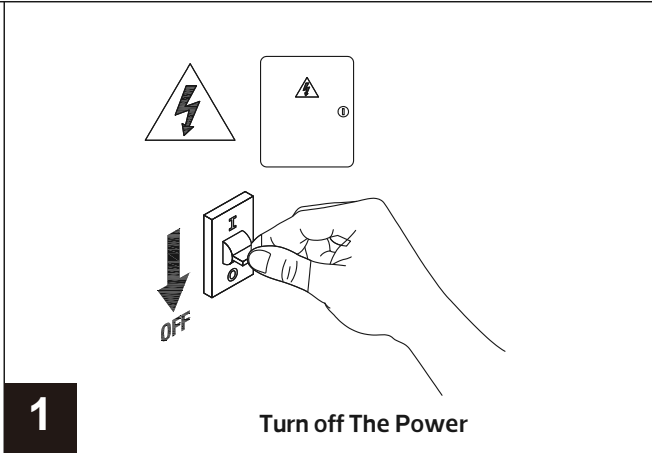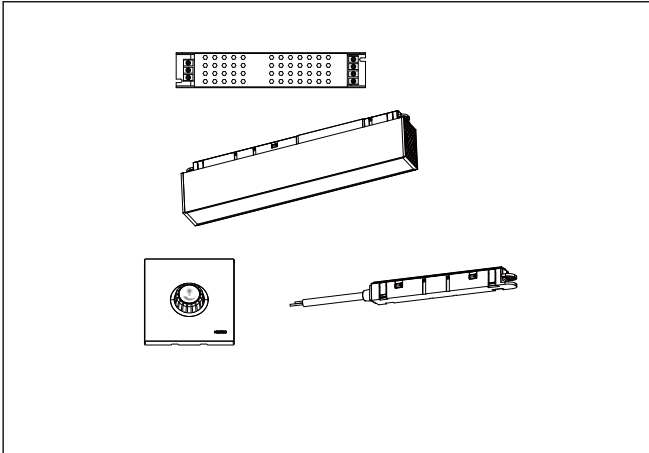


1

1 Turn off The Power

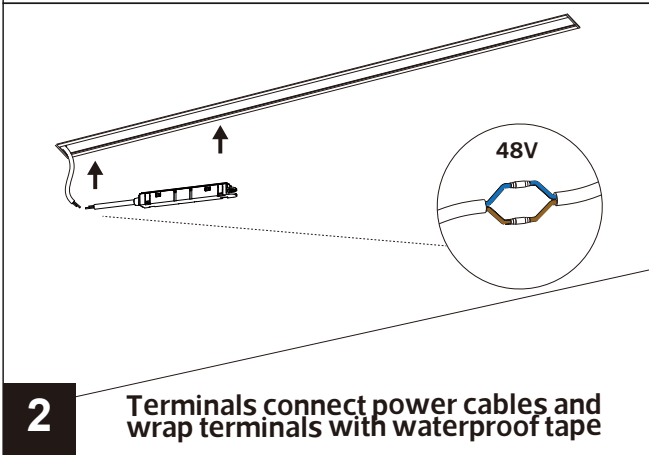


2

2 Terminals connect power cables and wrap terminals with waterproof tape

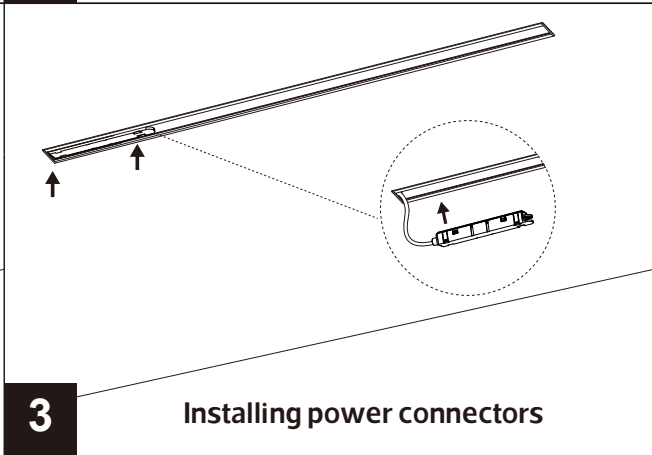


3

3 Installing power connectors

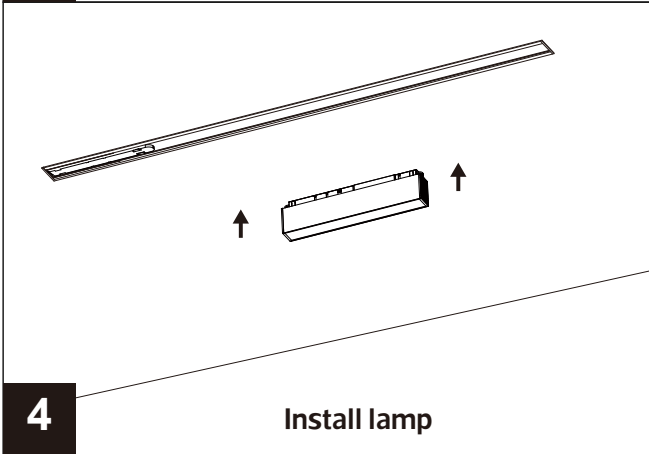


4

4 Install lamp

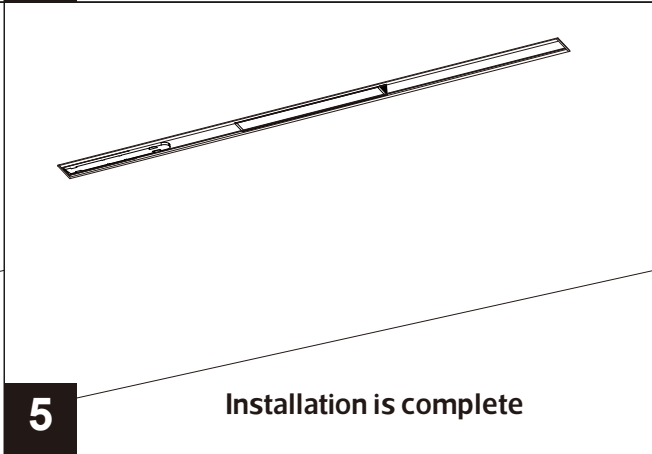


5

5 Installation is complete

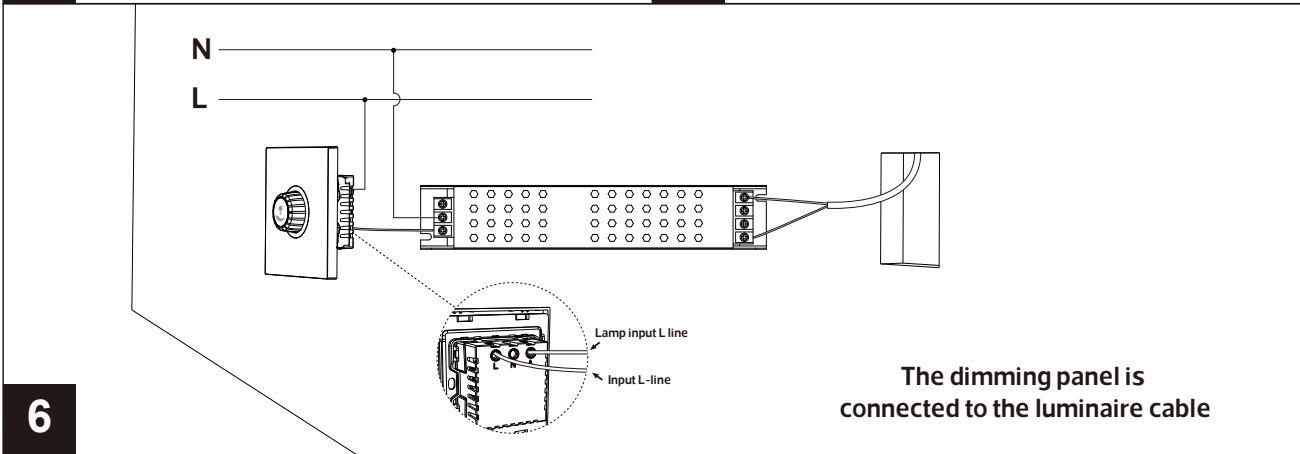


6

6 The dimming panel is connected to the luminaire cable



7

Turn on the power



8

Wirring diagram

