





LED SURFACE PANEL LIGHT



NR-SPL0101-18 Series
NR-SPL0101-24 Series
IP20



Model No	P(W)	CCT(K)	PF	Output (lm)	lm/w	Dimensions in mm		kg
						A	B	
NR-SPL0101-18-30K-WH-120D	18	3000	>0.7	1440	80	Φ225	35	0.77
NR-SPL0101-18-65K-WH-120D	18	6500	>0.7	1440	80	Φ225	35	0.77
NR-SPL0101-24-30K-WH-120D	24	3000	>0.7	1920	80	Φ300	38	1.16
NR-SPL0101-24-65K-WH-120D	24	6500	>0.7	1920	80	Φ300	38	1.16

Dimensions in mm

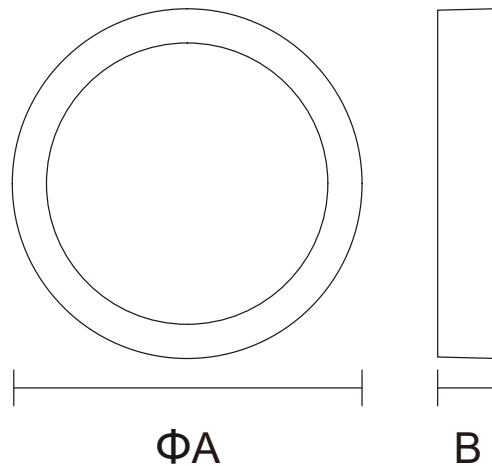

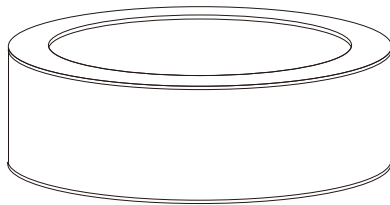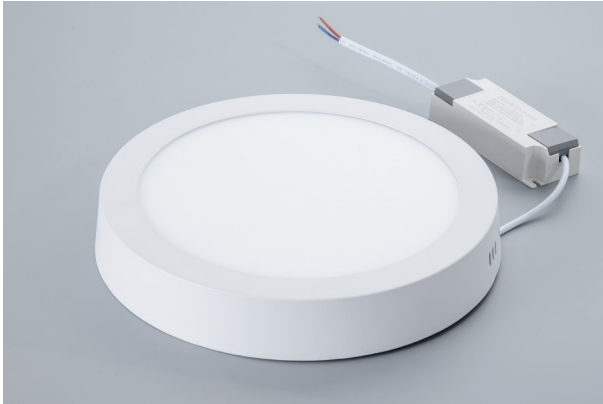

Description:

LED SURFACE PANEL LIGHT

Main material:



Aluminium+Pc+Iron

Specification


Aluminum lamp body, spraying process, fine work, corrosion and anti-rust, and durable. High transmittance Pc lampshade, bright and not dazzling, anti-aging, long service life. Iron base frame, surface oxidation treatment, strong and stable, safe to use IP20

Applications

- . Shoping mall
- . Office buildings
- . Exhibition hall

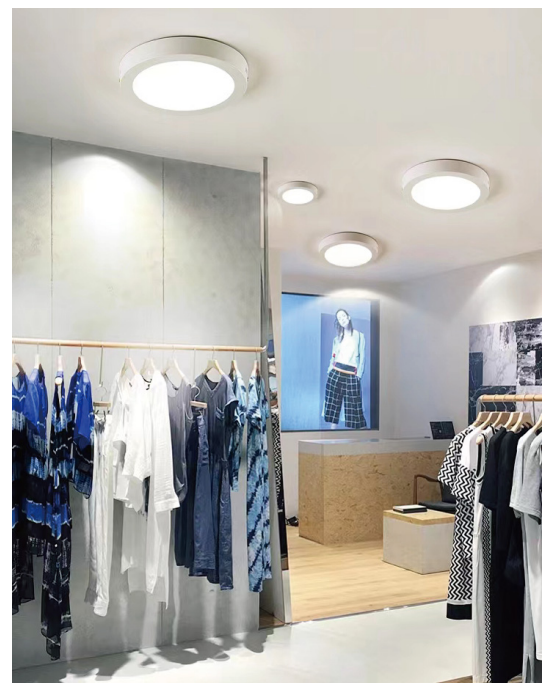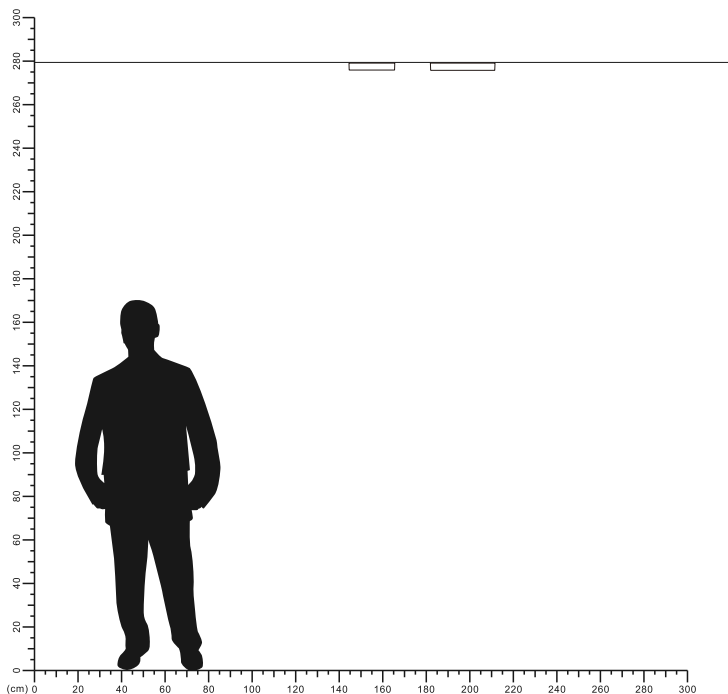


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

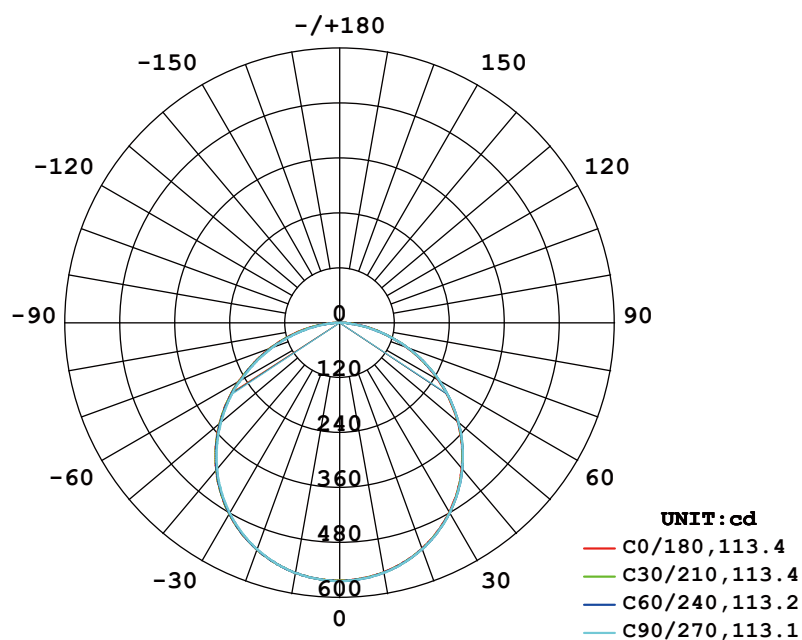


AVERAGE BEAM ANGLE (50%) : 113.3 DEG

Illuminance at a Distance

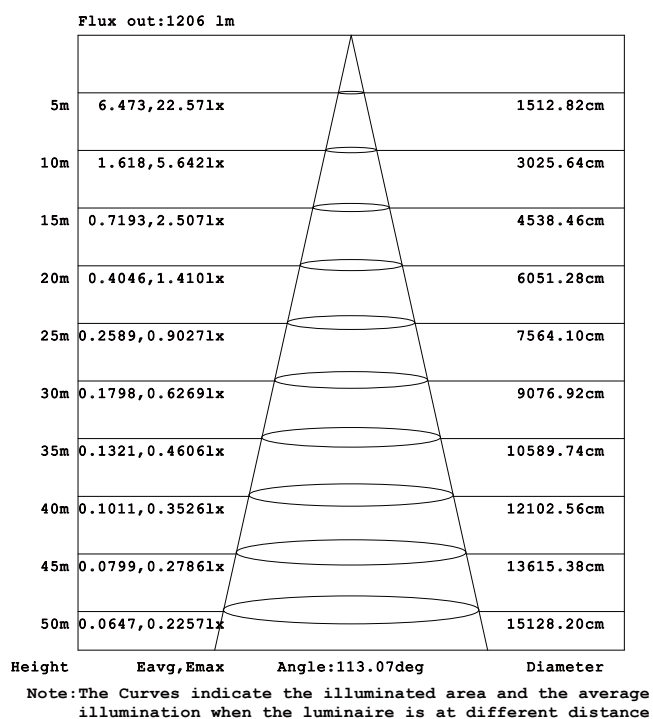


Model No: NR-SPL0101-18

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM


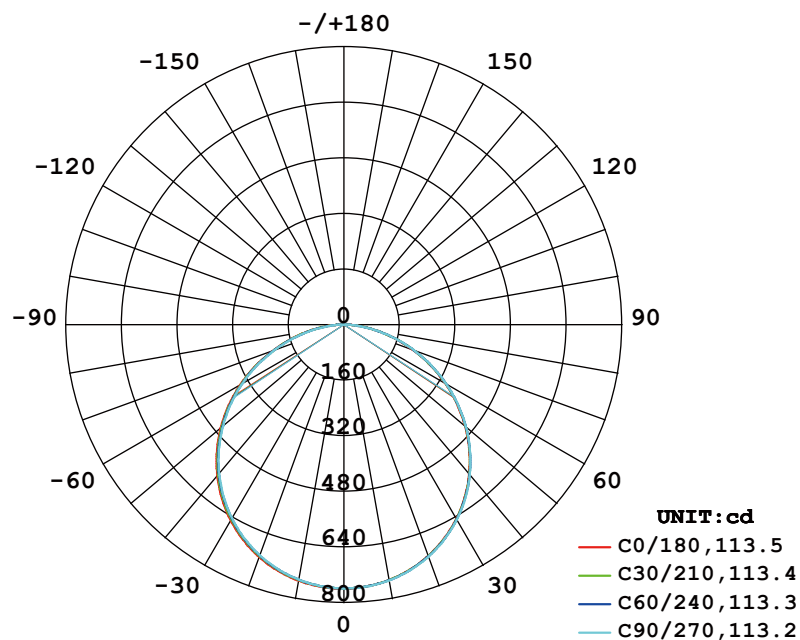


AVERAGE BEAM ANGLE (50%) : 113.4 DEG

Illuminance at a Distance

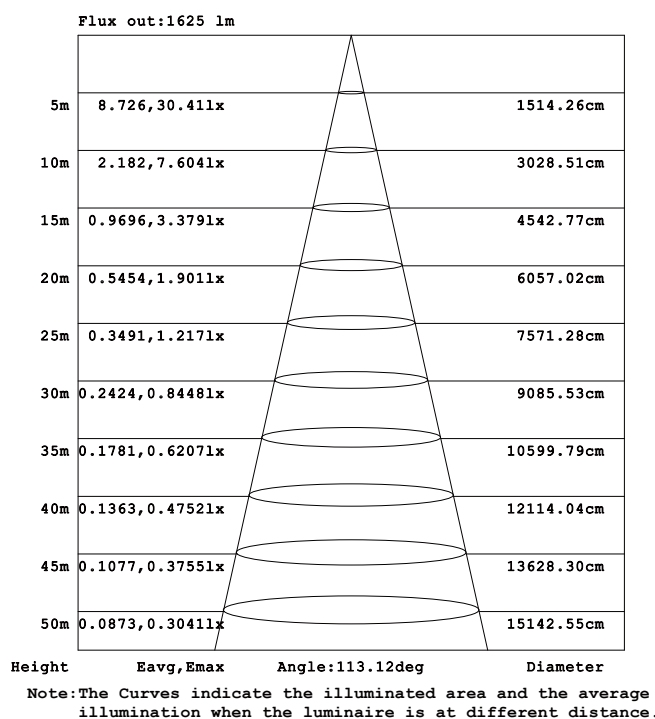


Model No: NR-SPL0101-24

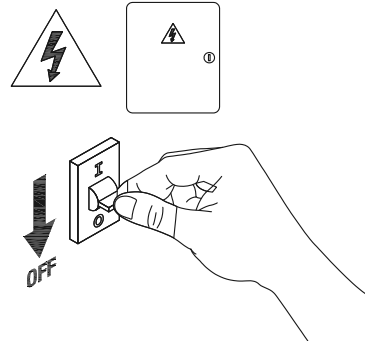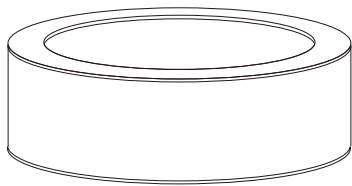


1

Turn off The Power




2

Drill two holes in the ceiling




3

Installation bottom board

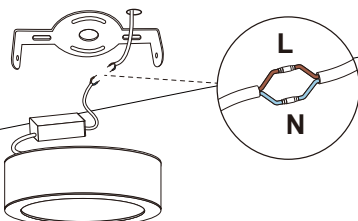

4

connect the cable

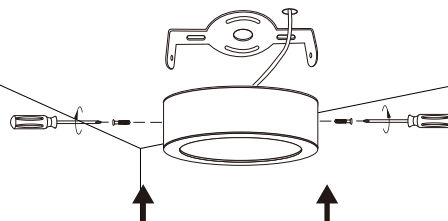


5

Fixed lamp body



6

Installation completed



7

Turn on the power

