

LED SURFACE PANEL LIGHT

NR-PL101S-18-SQ


IP44



Indoor	AC	50/60	PF	CCT	Ra	IP44	Beam	Chips	
	220-240V	Hz	≥0.9	3000K 6500K	≥80		Angel 120°	SMD	

Item Code	P (W)	CCT (K)	Beam angle	Output (lm)	lm/w	Dimensions in mm		
						A	B	kg
NR-PL101S-18-SQ	18	3000/6500	120°	1440	80	190	35	0.33

Dimensions in mm

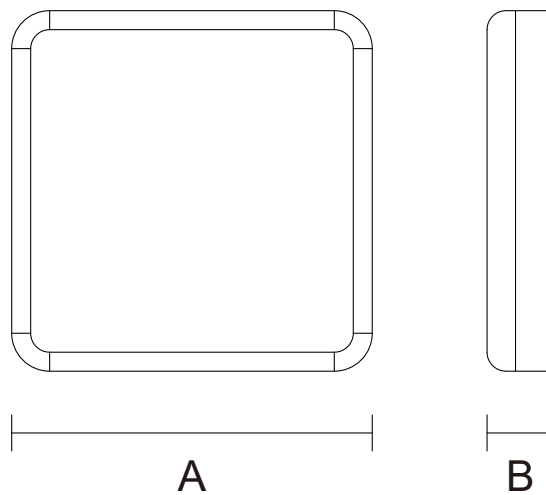




Description:
LED SURFACE PANEL LIGHT


Main material:
Iron+Engineering plastics

Specification
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
LED driver is included
IP44

Applications
• Shopping mall
• Office buildings
• Exhibition hall

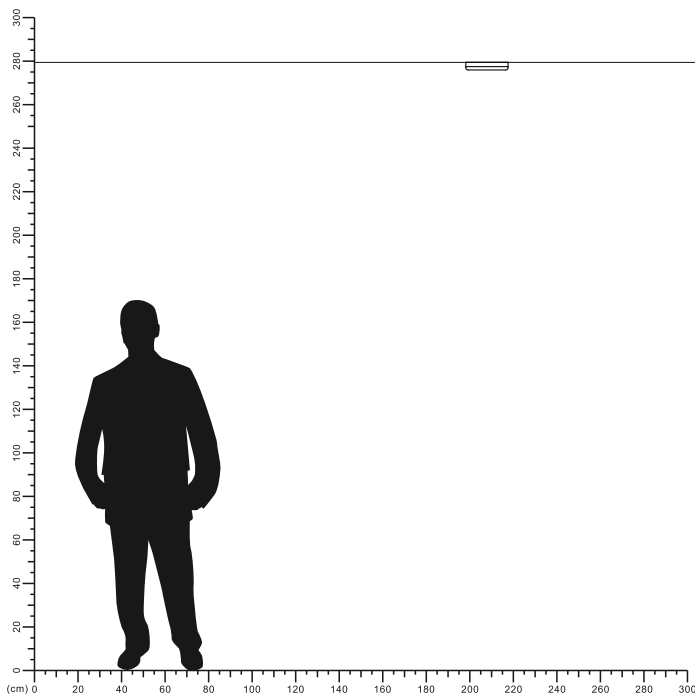



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

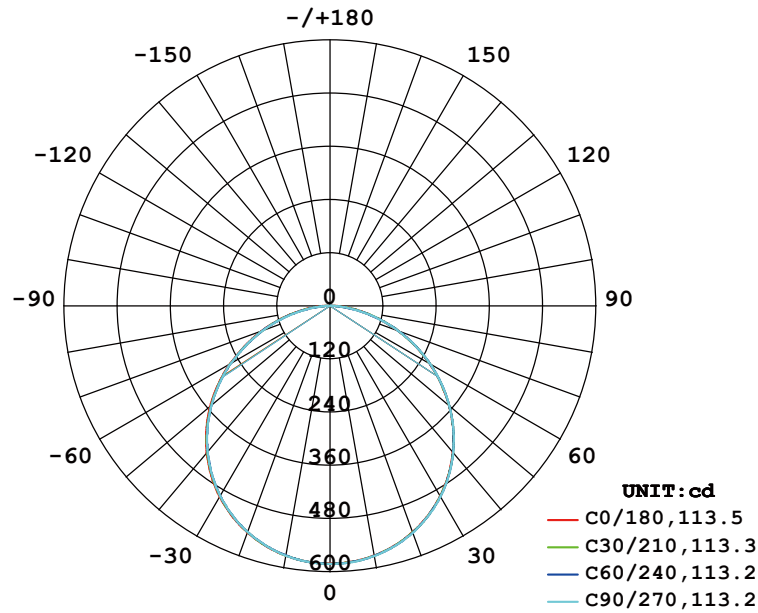

AVERAGE BEAM ANGLE (50%) : 113.3 DEG


Illuminance at a Distance

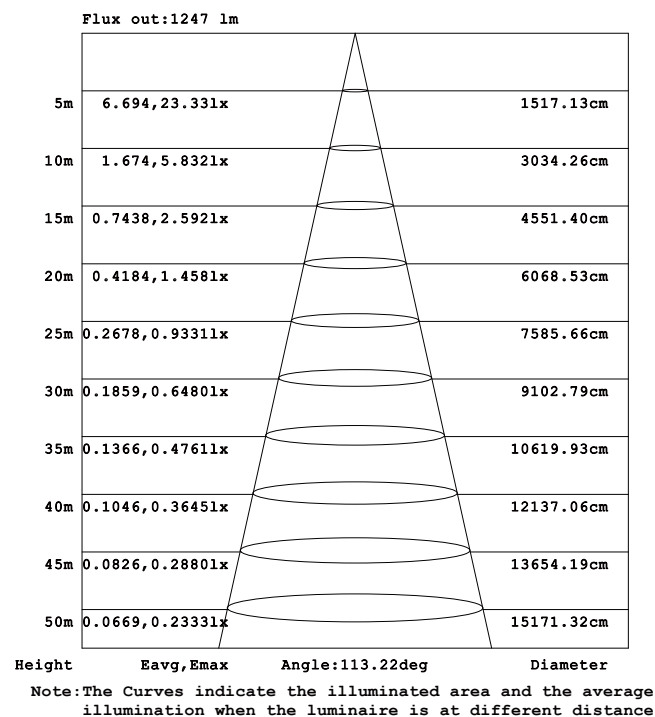

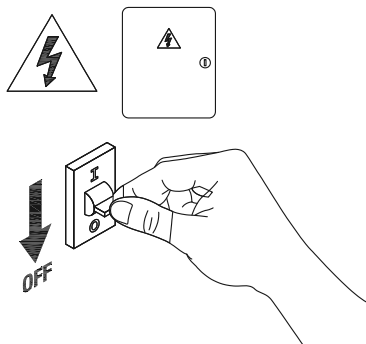


1

Turn off The Power




2

Drill 3 holes on your ceiling




3

Fixing the base

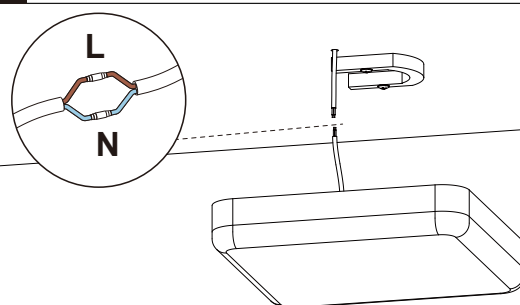


4

Connect the cable



5

Fixing the lamp body into the ceiling




6

Push the lamp to right side to fixed



7

Installation completed



8

Turn on the power

