

LED Outdoor Flood Lamp



NR-FL Series

IP65



Model No	P(W)	Color	CCT(K)	Total Lumen	Beam Angle	Dimensions in mm			kg
A	B	C							
NR-FL0201-50-30K-WH-60D	50	White	3000	5360	60°	210	225	45	1.2
NR-FL0201-50-65K-WH-60D	50	White	6500	5360	60°	210	225	45	1.2
NR-FL0201-50-30K-BK-60D	50	Black	3000	5350	60°	210	225	45	1.2
NR-FL0201-50-65K-BK-60D	50	Black	6500	5350	60°	210	225	45	1.2
NR-FL0101-100-30K-WH-60D	100	White	3000	10600	60°	285	320	50	2.3
NR-FL0101-100-65K-WH-60D	100	White	6500	10600	60°	285	320	50	2.3
NR-FL0101-100-30K-BK-60D	100	Black	3000	10600	60°	285	320	50	2.3
NR-FL0101-100-65K-BK-60D	100	Black	6500	10600	60°	285	320	50	2.3
NR-FL101-150S WW	150	White	3000	17000	60°	335	375	50	3.4
NR-FL0101-150-65K-WH-60D	150	White	6500	16995	60°	335	375	50	3.4
NR-FL0101-150-30K-BK-60D	150	Black	3000	16995	60°	335	375	50	3.4
NR-FL0101-150-65K-BK-60D	150	Black	6500	16995	60°	335	375	50	3.4
NR-FL103-200 WW	200	White	3000	20200	60°	382	412	60	4.5
NR-FL103-200	200	White	6500	20200	60°	382	412	60	4.5
NR-FL0151-200-30K-BK-60D	200	Black	3000	20200	60°	382	412	60	4.5
NR-FL0151-200-65K-BK-60D	200	Black	6500	20200	60°	382	412	60	4.5

Dimensions in mm

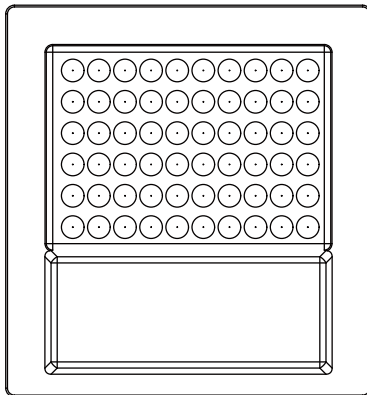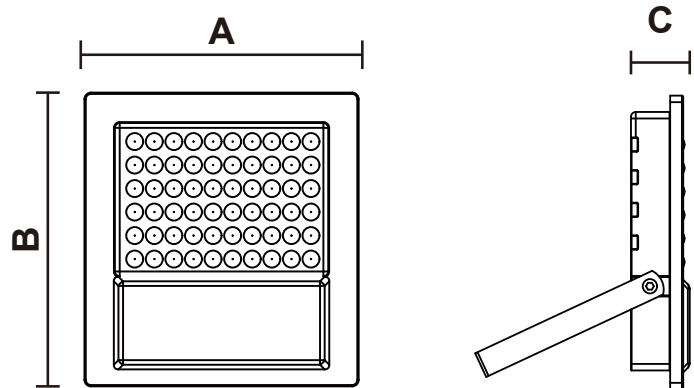

Description:

LED Outdoor Flood Lamp

Main material:


Die-cast aluminum+PC

Specification


- .Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
- .High quality light, high color rendering, less heat, no UV or IR radiation
- .LED driver is included
- IP65

Applications

- .Lawn
- .Garden
- .Building external wall

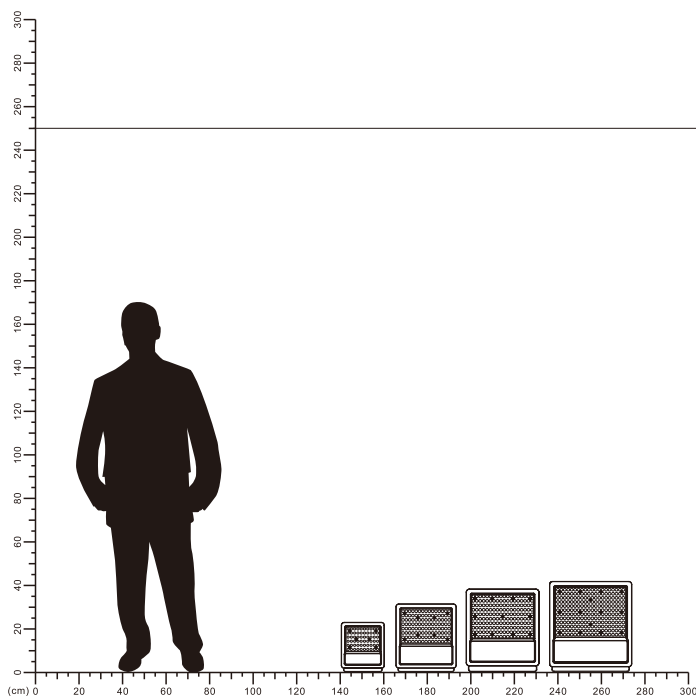


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

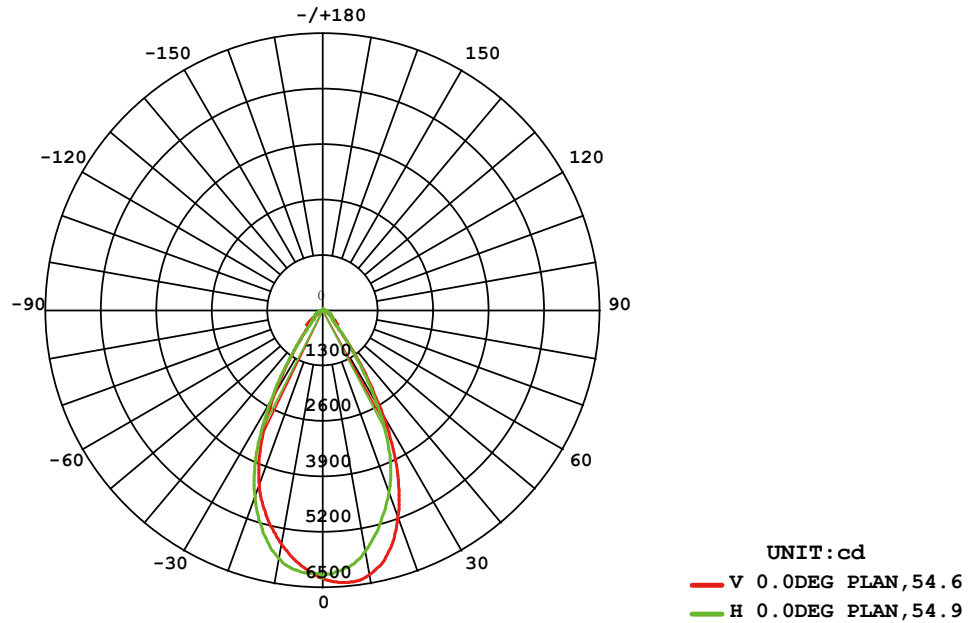


AVERAGE BEAM ANGLE (50%) : 54.8 DEG

Illuminance at a Distance

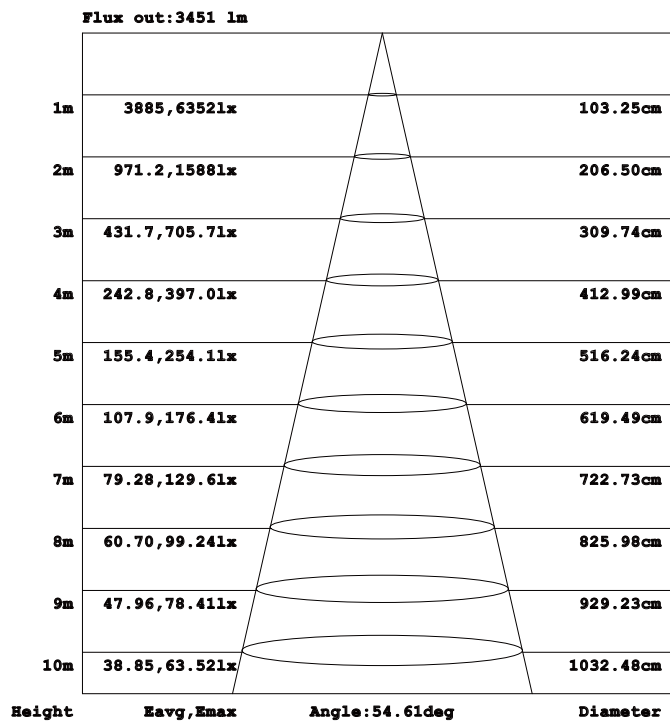


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

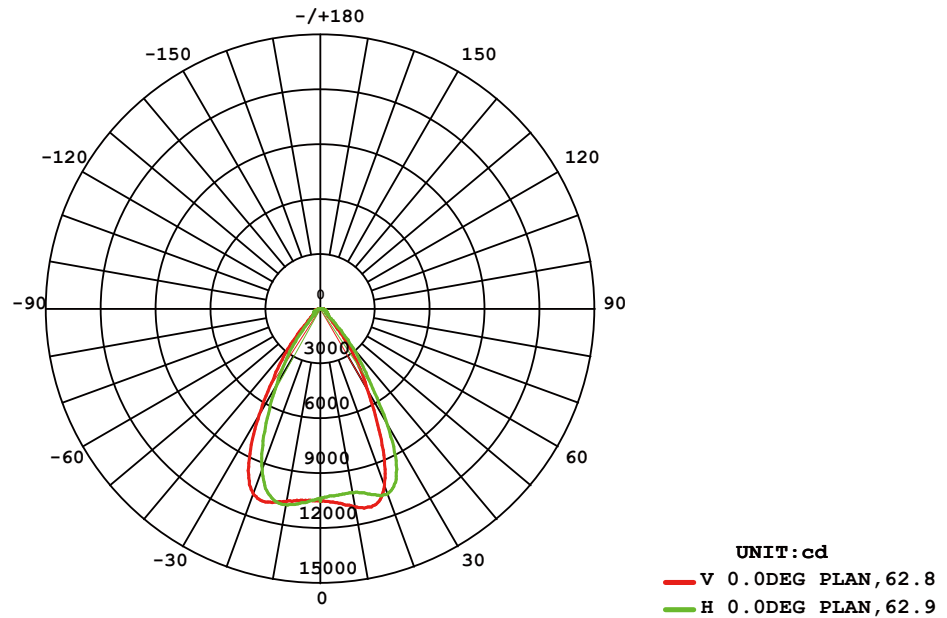


AVERAGE BEAM ANGLE (50%) : 62.9 DEG

Illuminance at a Distance

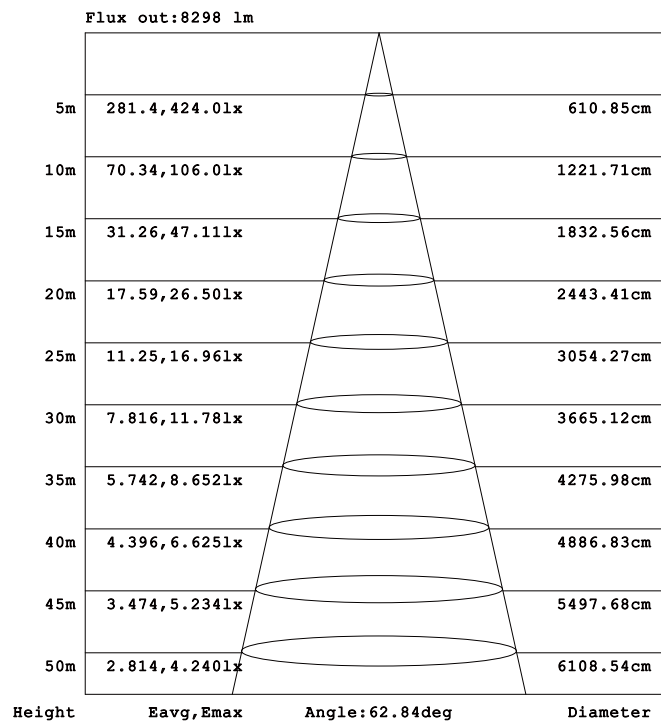


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

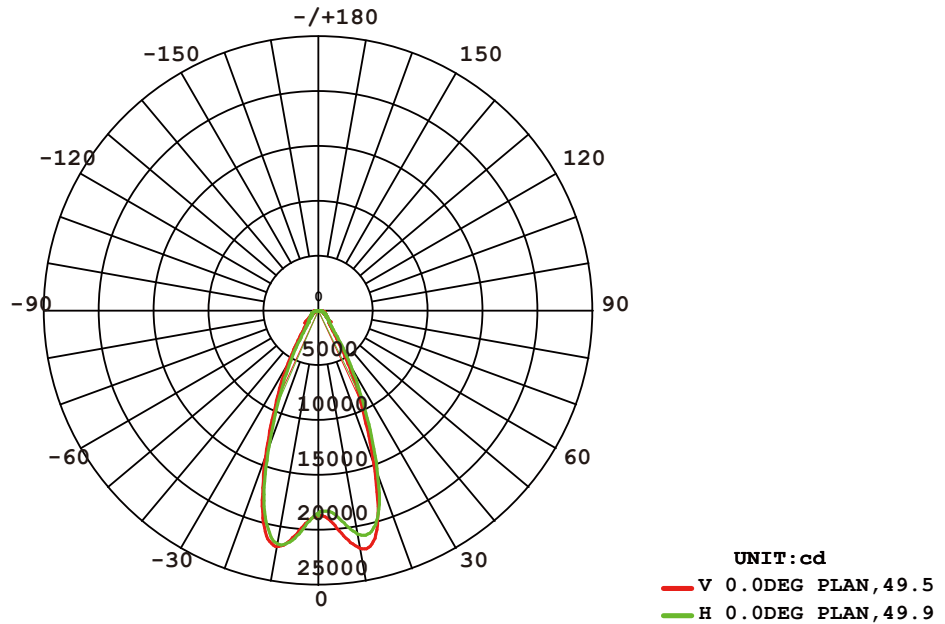


AVERAGE BEAM ANGLE (50%) : 49.7 DEG

Illuminance at a Distance

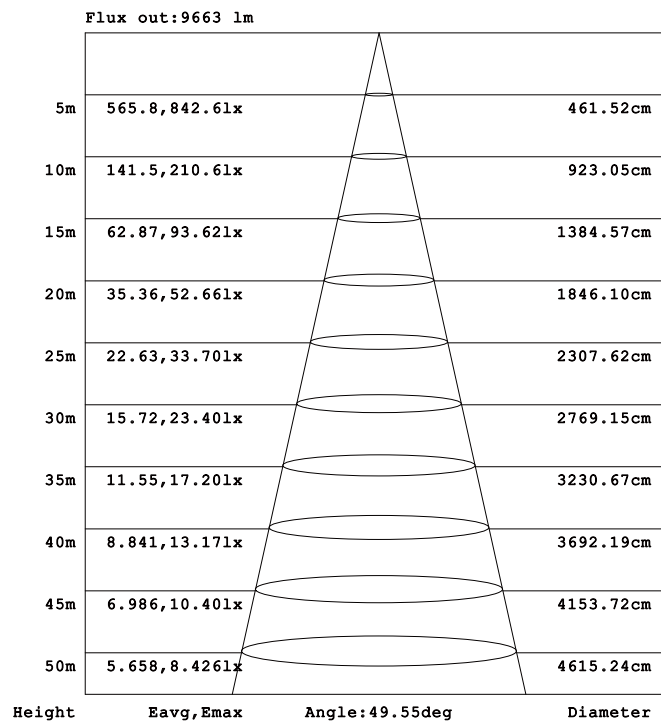

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

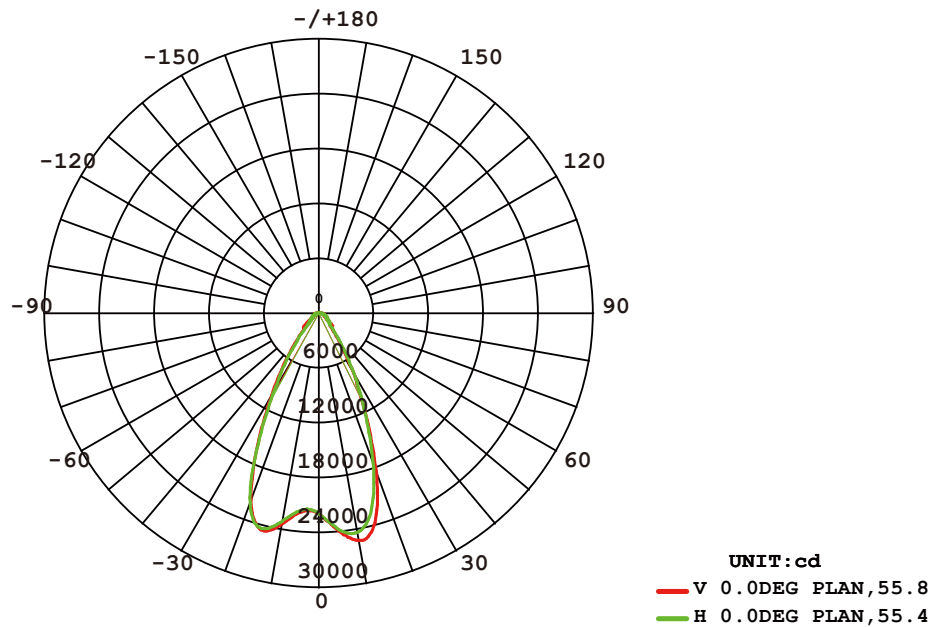

AVERAGE BEAM ANGLE (50%) : 55.6 DEG

Illuminance at a Distance

