

SMART GARAGE CONTROLLER



AC

100-240V

50/60

Hz

Color

White


-20°C~40°C

Operating Humidity

0%-90%

Item Code	Communication Method	Material	IP Rate	Installation Place	Power Source	Wi-Fi Frequency
MS-GD101-W-WH	Wi-Fi	PC+PCB	20	Mount Wall	AC	2.4GHz 802.11 b/g/n Only

Dimensions in mm

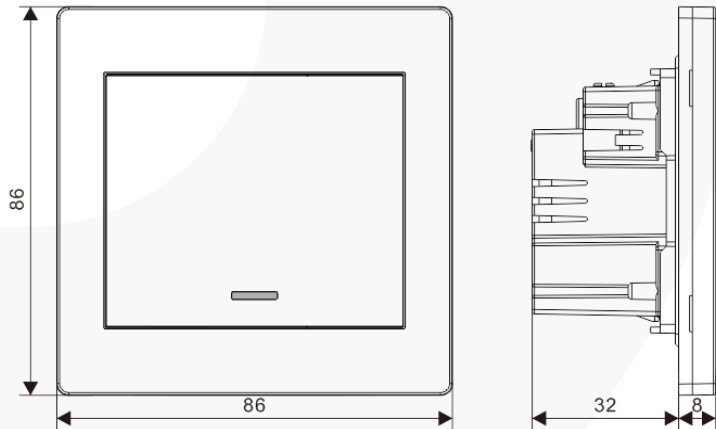


Test Device For Opener Compatibility

Step 1

- 1 Power up the garage controller, the Red light and blue light flash alternatively.
- 2 Use the included Red & Black wire connect the device to your opener: put each end to the same terminals as the wall button wires are terminated to.
- 3 Use a tiny screw or nail to click the button in the device, your garage door should be activated.


***The motor and wall console are not included in the package.**

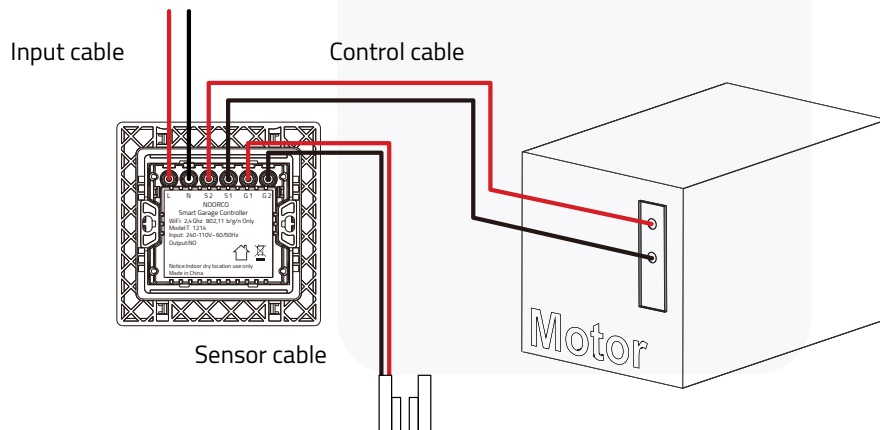

Test Ok! Click the button every time, the garage door will open or close.

Below are checklist before using the device:


- Your smart phone or tablet should have connected a 2.4Ghz WiFi with internet.
- The device only supports 2.4GHz WiFi. If you use a 5G router(it provides two WiFi signals: 5GHz and 2.4GHz), please select the 2.4GHz WiFi to connect your smart phone.
- Download "Meshkatech" App from App Store or Google Play store.
- Make sure your router is MAC open, if not, please cancel the router's MAC filtering setting first.

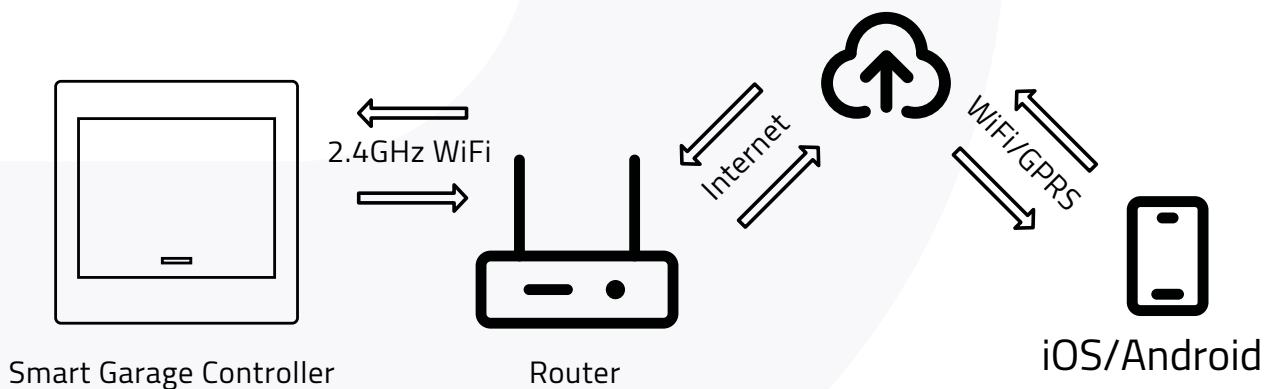



Do this installation after you successfully added the device to your app.
***Keep your garage door is closed.**


EASY INSTALLATION

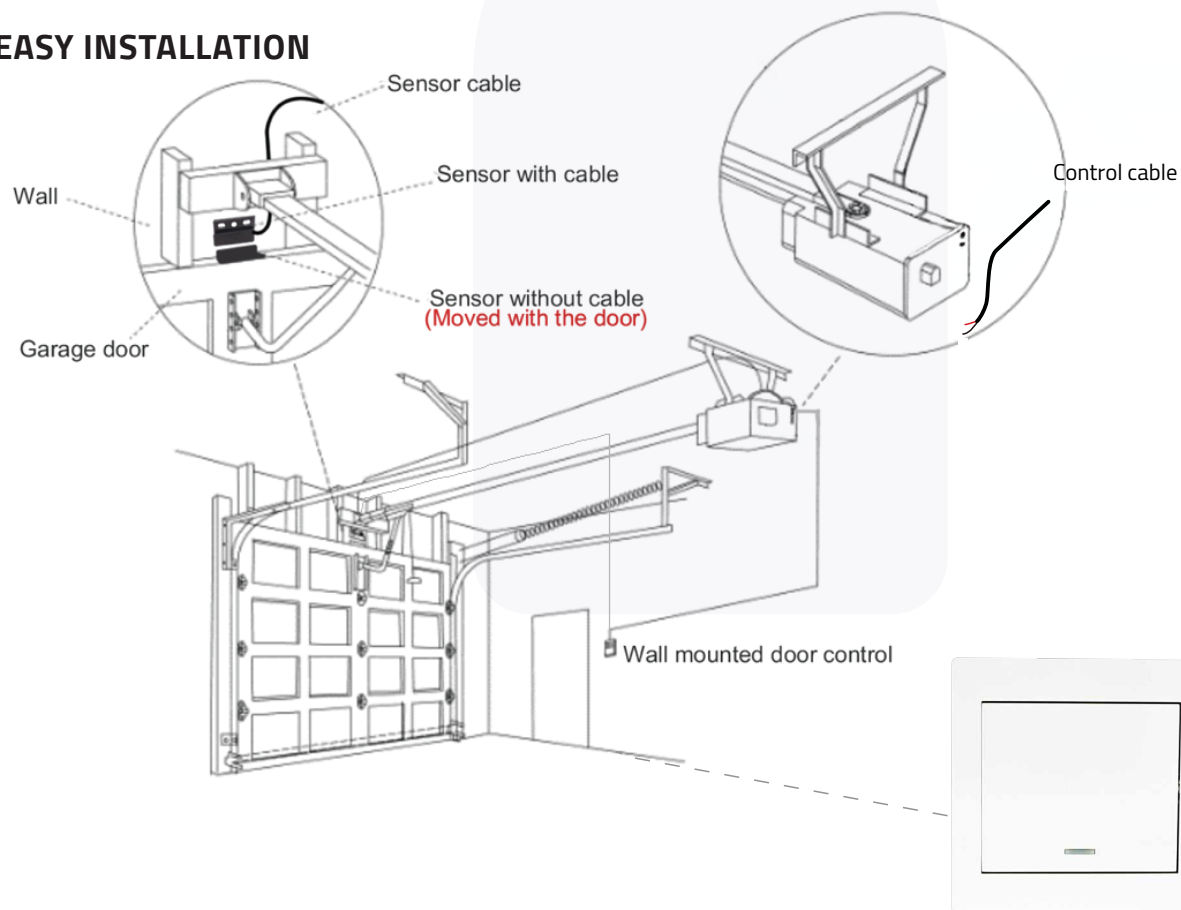

Contents



Smart Garage
Controller



Line Holds



Sticker



Ties



Door Sensor



Brackets



Wall Nails



Screws

Step 4

Power up.

Step 4.1


Connect to the wall console.

Insert the Red & Black wire 2.0mm terminal to the garage, the put each end to the same terminals as the wall button wires are terminated to.


Step 4.2

Connect to the garage door.

Insert the 2.0mm terminal of the sensor to the garage, then steady install the sensor and the magnet of the gap with in 3mm to 15mm on your garage door with screws/bracket/3M gums/Wall nail/line holders/ties.

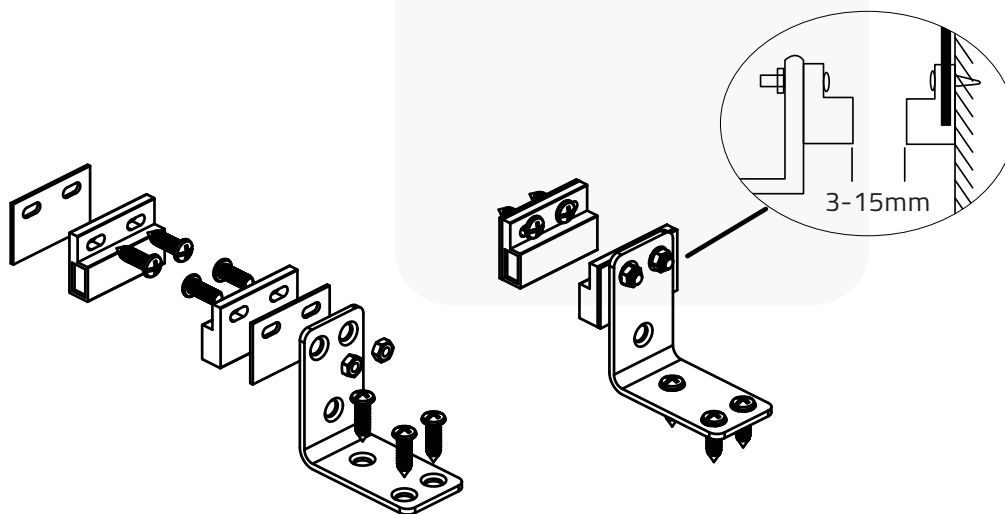

If it is hard to install with screws, you can also use the 3M gums to finish. If you are worried about the steady, you can use both screws and 3M gums.



Works with Alexa



- 1 Open Alexa App, tap on the menu on upper left corner, go to skills.
 - 2 Enter "Meshkatech" in the search field and search.
 - 3 Tap "Meshkatech".
 - 4 Enable the skill.
 - 5 Enter your account information and tap on "Log in" to link your account to your Amazon account. If your account is a phone number, you should select your country. If your account is an email address, please select a random country/region code.
- Voice commands: "Alexa turn on {Device name}" "Alexa turn off {Device name}"



Works with Google Home



- 1 Launch Google Home App, tap the menu.
 - 2 Tap Home control.
 - 3 Under Devices, tap the "+" icon.
 - 4 Tap "Meshkatech".
 - 5 Enter your account information and tap on "Log in" to link your account to your Amazon account. If your account is a phone number, you should select your country. If your account is an email address, please select a random country/region code.
- Voice commands: "Hey google turn on {Device name}" "Hey google turn off {Device name}"