

LED OUTDOOR BURIED LAMP

CP7027-120 series


IP65




Outdoor	AC 220-240V	50/60 Hz	PF ≥0.7	CCT 3000K	Ra ≥80	IP65	Beam Angel 15°/120°	Chips SMD	
---------	----------------	-------------	------------	--------------	-----------	------	---------------------------	--------------	--

Item Code	P (W)	Beam angle	Output (lm)	lm/w	Hole Size (mm)	Dimensions in mm		kg
						A	B	
CP7027-120-1	6	15°	30	5	Φ120mm	Φ120	100	0.80
CP7027-120-2	6	200°	30	5	Φ120mm	Φ120	100	0.68
CP7027-120-4	6	200°	30	5	Φ120mm	Φ120	100	0.69


Dimensions in mm

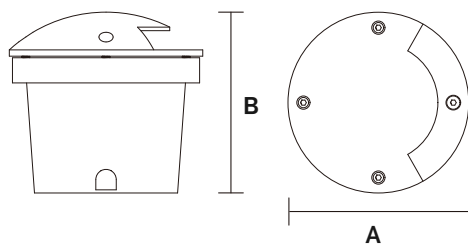


CP7027-120-1

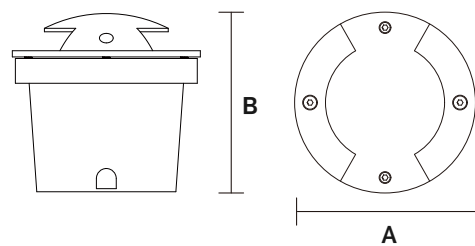

CP7027-120-2

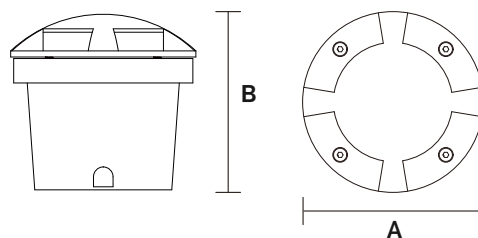

CP7027-120-4

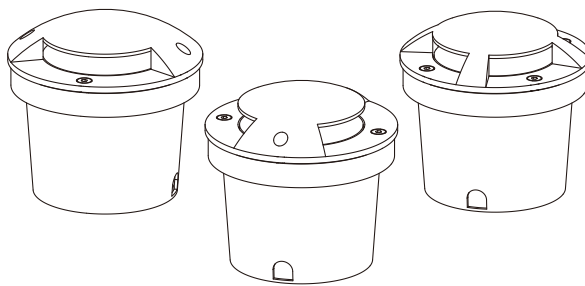

Description:

LED Outdoor Buried Lamp

Main material:



304 stainless steel + Engineering plastics

Specification


Aviation aluminum shell, no corrosion, no rust, Glass lens, natural light without light spot, The base is firmly fixed and will not fall over
IP 65

Applications

- . Park
- . Square
- . Corridor

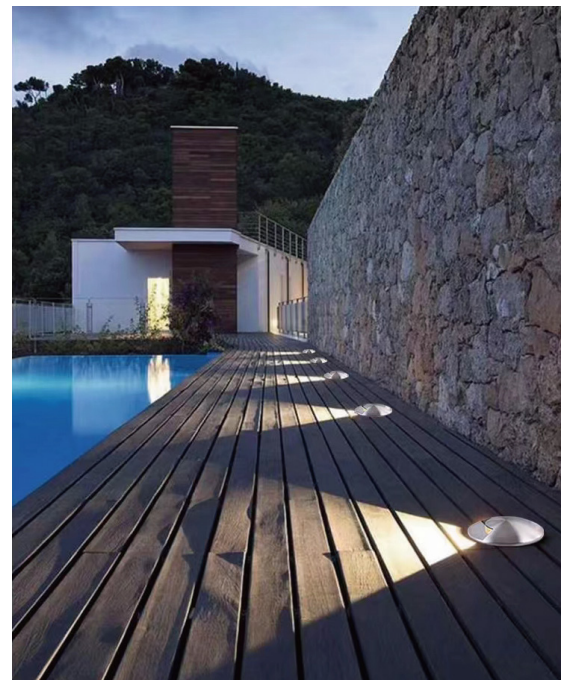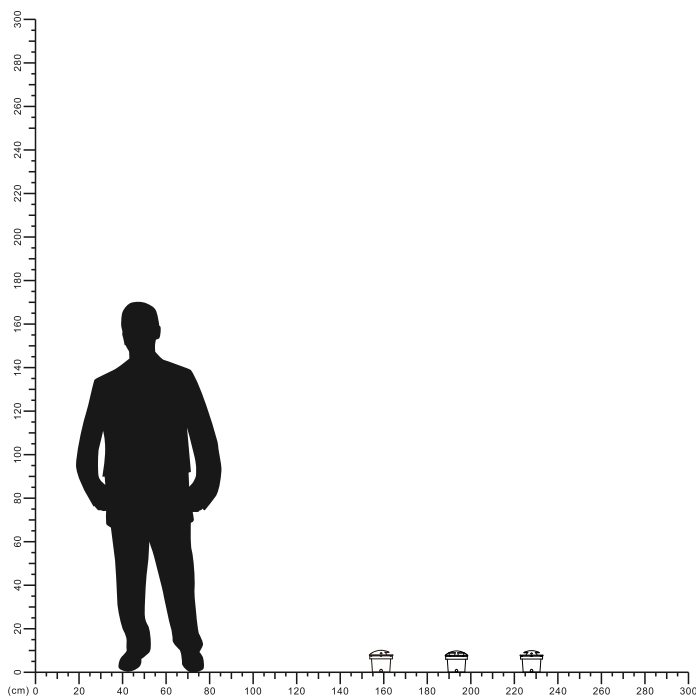


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

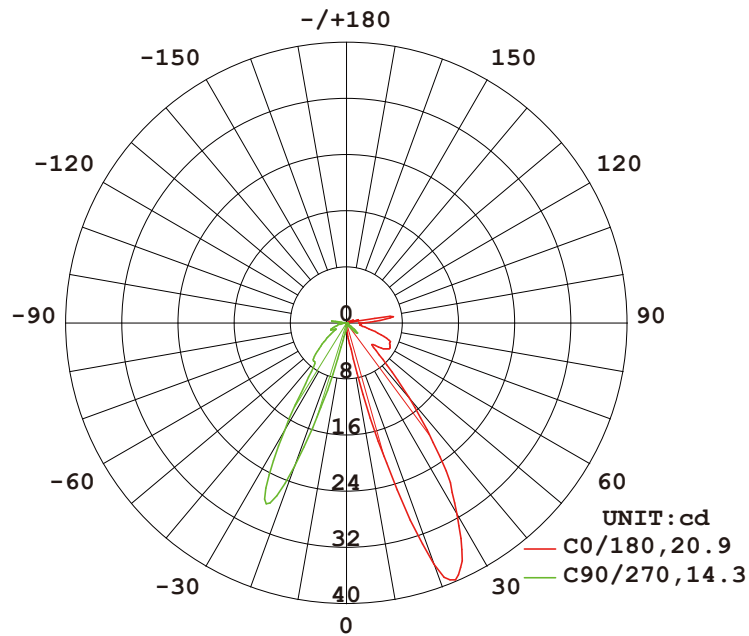


AVERAGE BEAM ANGLE (50%) : 17.6 DEG

Illuminance at a Distance

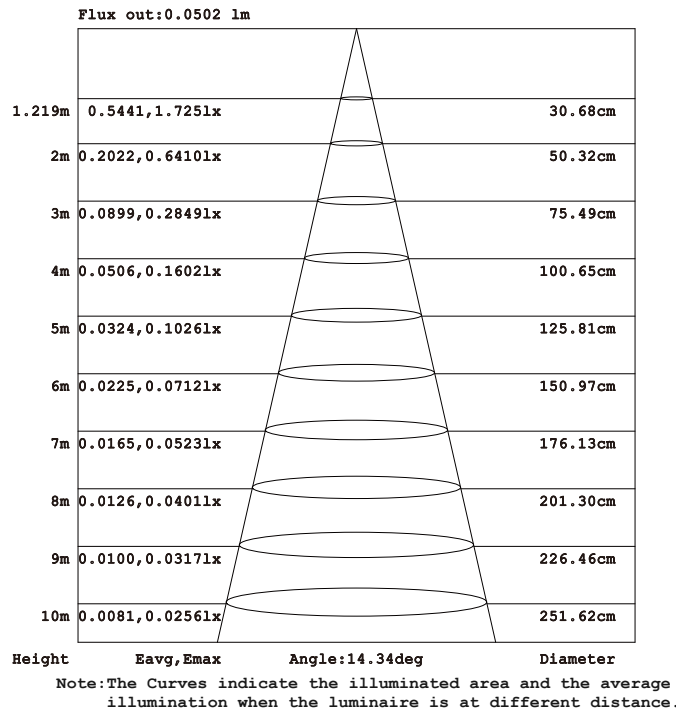


Model: CP7027-120-1

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

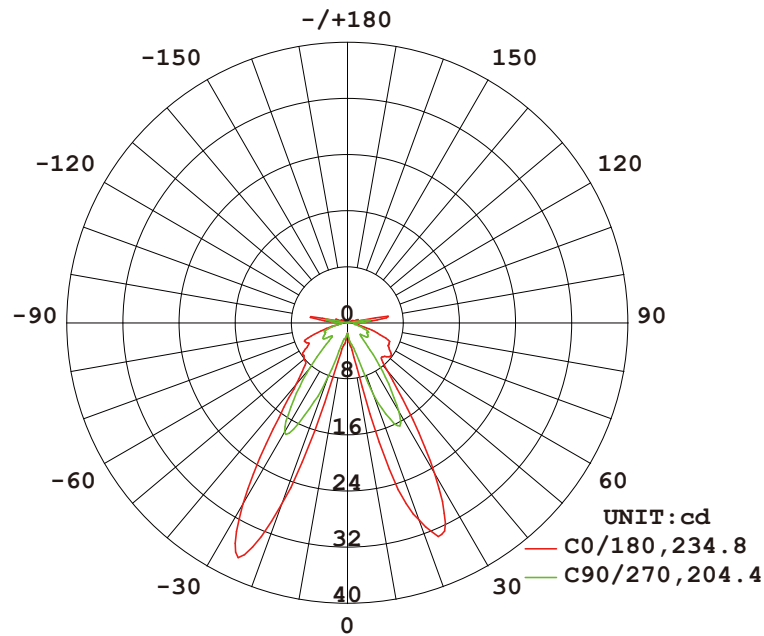


AVERAGE BEAM ANGLE (50%) : 219.6 DEG

Illuminance at a Distance

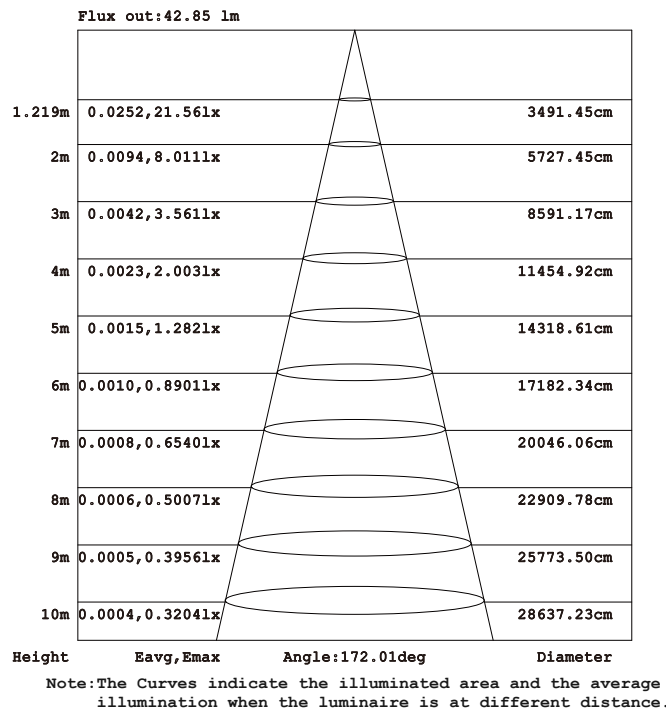

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

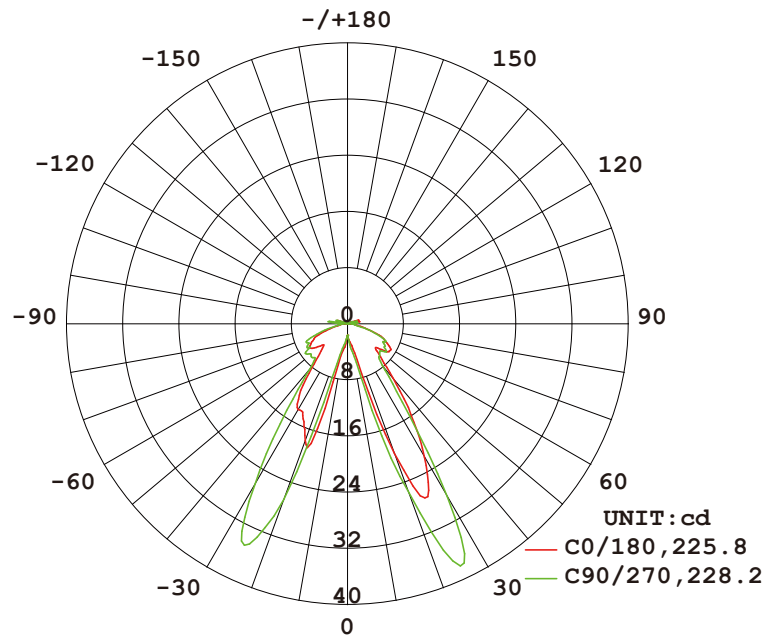

Illuminance at a Distance

