





LED Magnetic Track System

NR-M2FD0551 Series
IP20

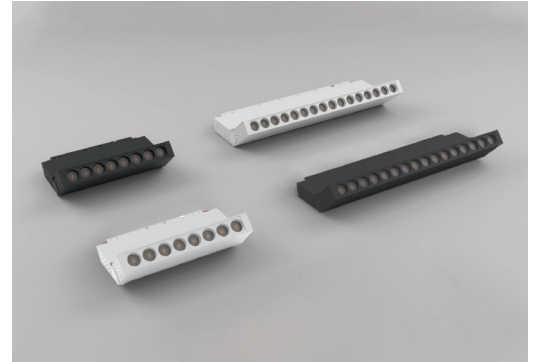


Model No	P(W)	CCT(K)	Output (lm)	lm/w	Color	Dimensions in mm			kg
						A	B	C	
NR-M2FD0551-10-27K-BK-24D	10	2700	680	68	Black	305	23	137	0.6
NR-M2FD0551-10-30K-BK-24D	10	3000	710	71	Black	305	23	137	0.6
NR-M2FD0551-10-40K-BK-24D	10	4000	710	71	Black	305	23	137	0.6
NR-M2FD0551-10-30K-WH-24D	10	3000	710	71	White	305	23	137	0.6
NR-M2FD0551-10-40K-WH-24D	10	4000	710	71	White	305	23	137	0.6
NR-M2FD0551-6-27K-BK-24D	6	2700	414	69	Black	158	23	137	0.38
NR-M2FD0551-6-30K-BK-24D	6	3000	426	71	Black	158	23	137	0.38
NR-M2FD0551-6-40K-BK-24D	6	4000	426	71	Black	158	23	137	0.38
NR-M2FD0551-6-30K-WH-24D	6	3000	426	71	White	158	23	137	0.38
NR-M2FD0551-6-40K-WH-24D	6	4000	426	71	White	158	23	137	0.38


Dimensions in mm

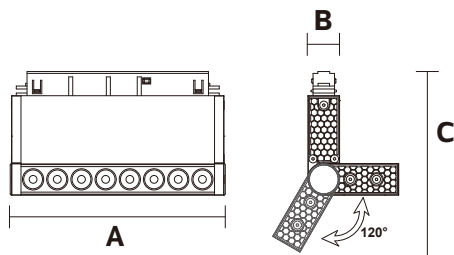

Model No:NR-M2FD0551-6 Series

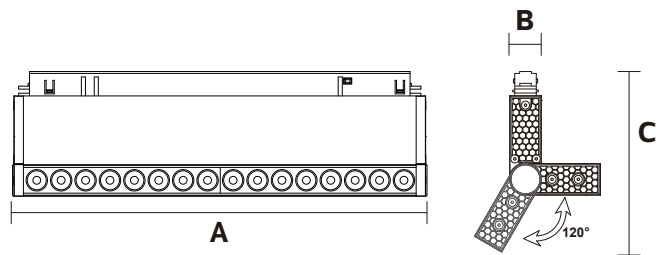

Model No:NR-M2FD0551-10 Series

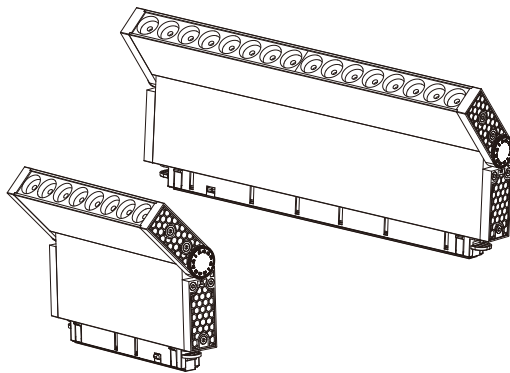


Description:
LED Magnetic Track System

Main material:
Aluminum+Pc




Specification:
Aluminum lamp body integrated die-casting molding, spraying process, fine work, waterproof and dustproof. High light transmission PC material lamp shade, bright and not dazzling, anti-aging, long service life. IP20

Applications
.Office
.Meeting room
.Sitting room

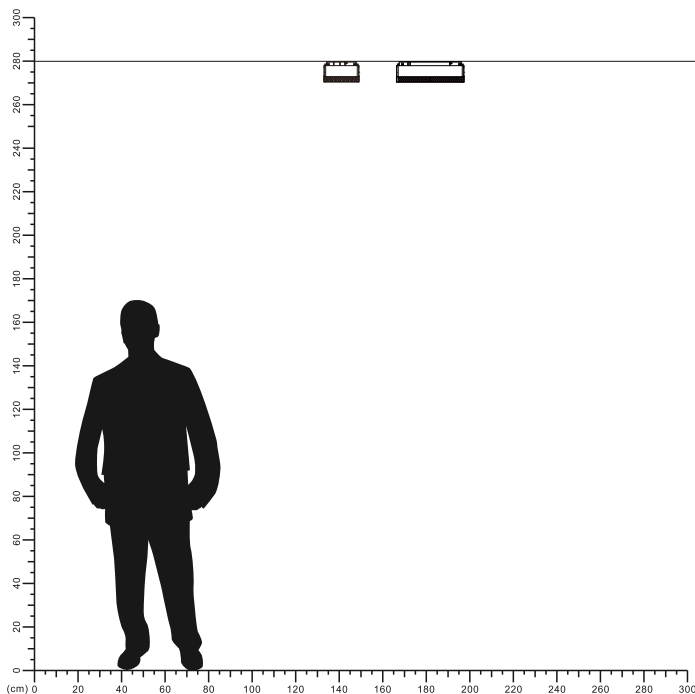


Magnetic Track System Power Supply

NR-S20-S35-PS-48V-100-DIM
IP20




Model No	P(W)	Input	Output	Dimensions in mm			
				A	B	C	
NR-S20-S35-PS-48V-100-DIM	100	AC220-240V	DC48V 2.1A	260	30	48	0.7

Dimensions in mm

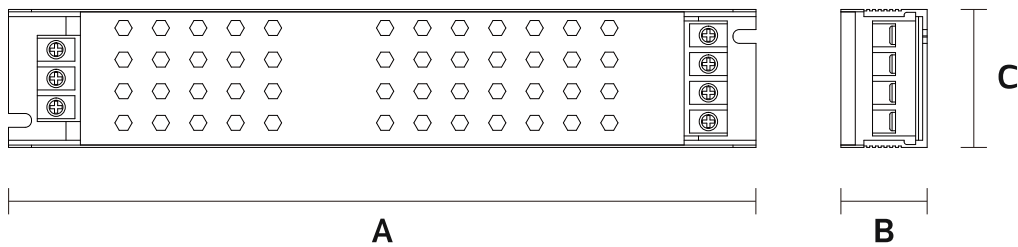


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

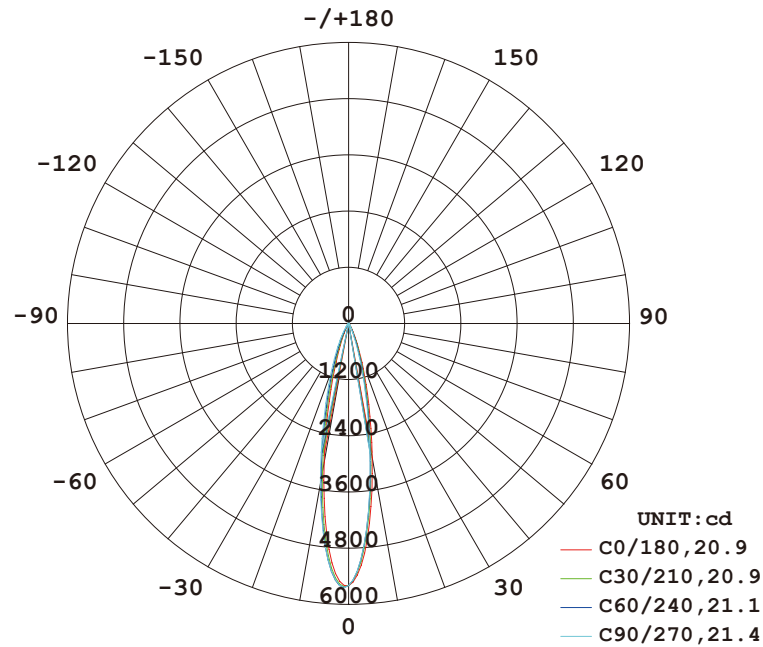

AVERAGE BEAM ANGLE (50%) : 21.1 DEG


Illuminance at a Distance

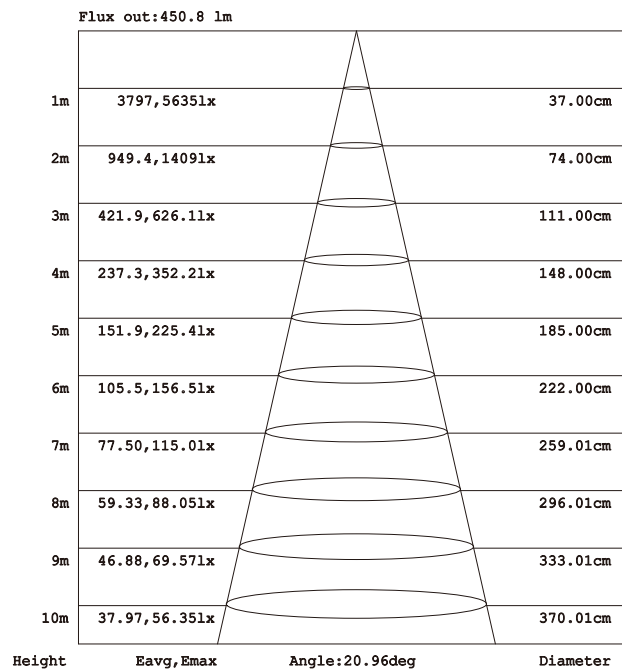

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


Model No: NR-M2FD0551-10 Series

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

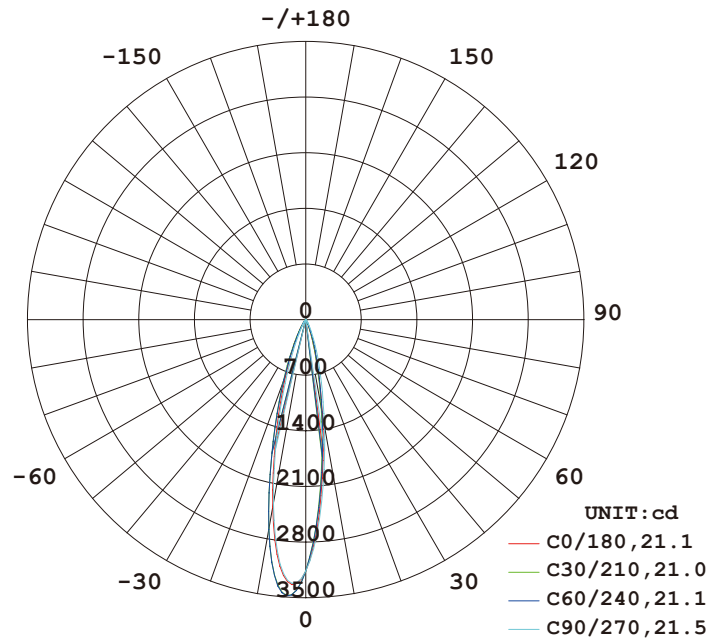


AVERAGE BEAM ANGLE (50%) : 21.2 DEG

Illuminance at a Distance


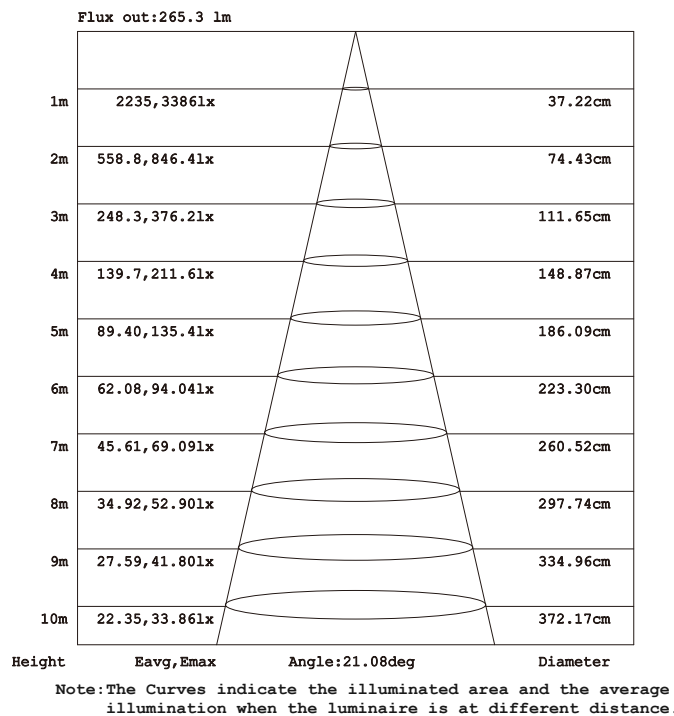


Model No: NR-M2FD0551-6 Series

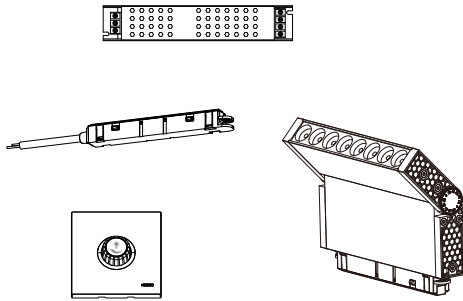


1

Turn off The Power

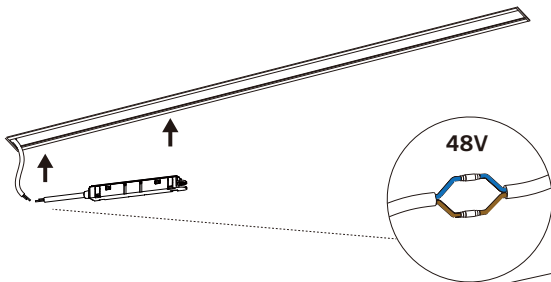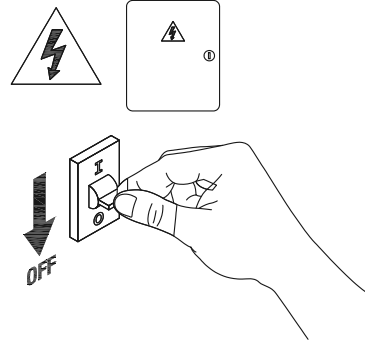


2

Terminals connect power cables and wrap terminals with waterproof tape

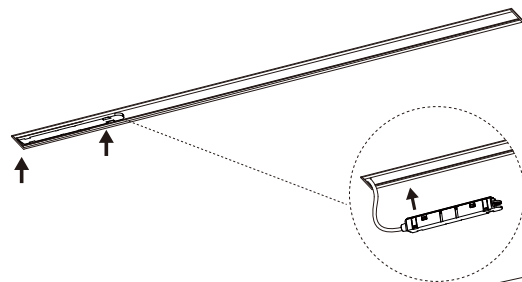


3

Installing power connectors

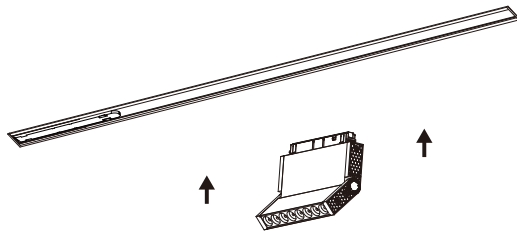


4

Install lamp

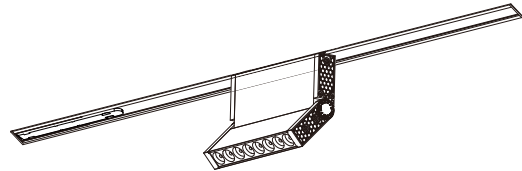


5

Installation is complete

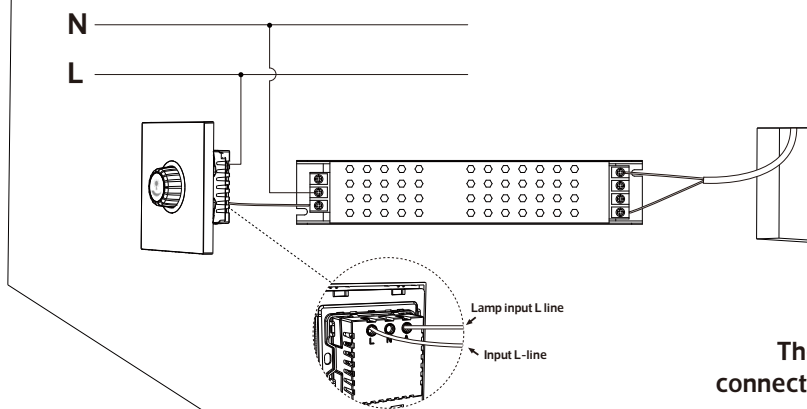

6

The dimming panel is connected to the luminaire cable



7

Turn on the power



8

Wirring diagram

