



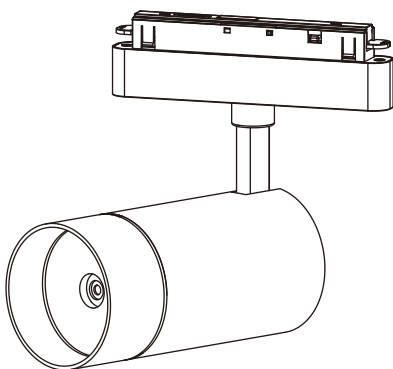


LED Magnetic Track System

NR-MTL0301 Series
IP20

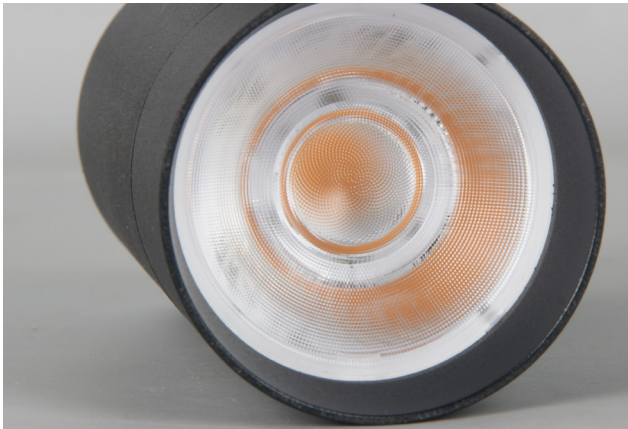

Model No	P(W)	CCT(K)	Output (lm)	lm/w	Beam Angle	Color	Dimensions in mm			
							A	B	C	
NR-MTL0301-10-27K-BK-20D	10	2700	680	68	20°	Black	150	Φ56	212	0.33
NR-MTL0301-10-30K-BK-20D	10	3000	710	71	20°	Black	150	Φ56	212	0.33
NR-MTL0301-10-40K-BK-20D	10	4000	710	71	20°	Black	150	Φ56	212	0.33
NR-MTL0301-10-30K-WH-20D	10	3000	710	71	20°	White	150	Φ56	212	0.33
NR-MTL0301-10-40K-WH-20D	10	4000	710	71	20°	White	150	Φ56	212	0.33
NR-MTL0301-10-27K-BK-36D	10	2700	680	68	36°	Black	150	Φ56	212	0.33
NR-MTL0301-10-30K-BK-36D	10	3000	710	71	36°	Black	150	Φ56	212	0.33
NR-MTL0301-10-40K-BK-36D	10	4000	710	71	36°	Black	150	Φ56	212	0.33
NR-MTL0301-10-30K-WH-36D	10	3000	680	68	36°	White	150	Φ56	212	0.33
NR-MTL0301-10-40K-WH-36D	10	4000	710	71	36°	White	150	Φ56	212	0.33
NR-MTL0301-15-27K-BK-36D	15	2700	1110	74	36°	Black	150	Φ75	240	0.53
NR-MTL0301-15-30K-BK-36D	15	3000	1155	77	36°	Black	150	Φ75	240	0.53
NR-MTL0301-15-40K-BK-36D	15	4000	1155	77	36°	Black	150	Φ75	240	0.53

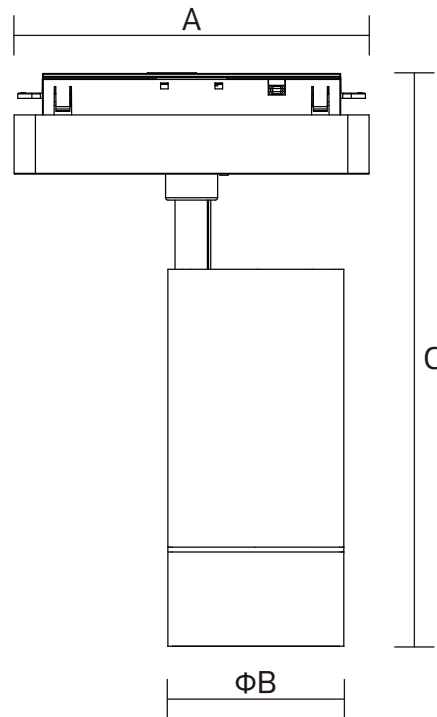


Description:
LED Magnetic Track System

Main material:
Aluminum+Pc





Specification:
Aluminum lamp body integrated die-casting molding, spraying process, fine work, waterproof and dustproof. High light transmission PC material lamp shade, bright and not dazzling, anti-aging, long service life. IP20

Applications
.Office
.Meeting room
.Sitting room

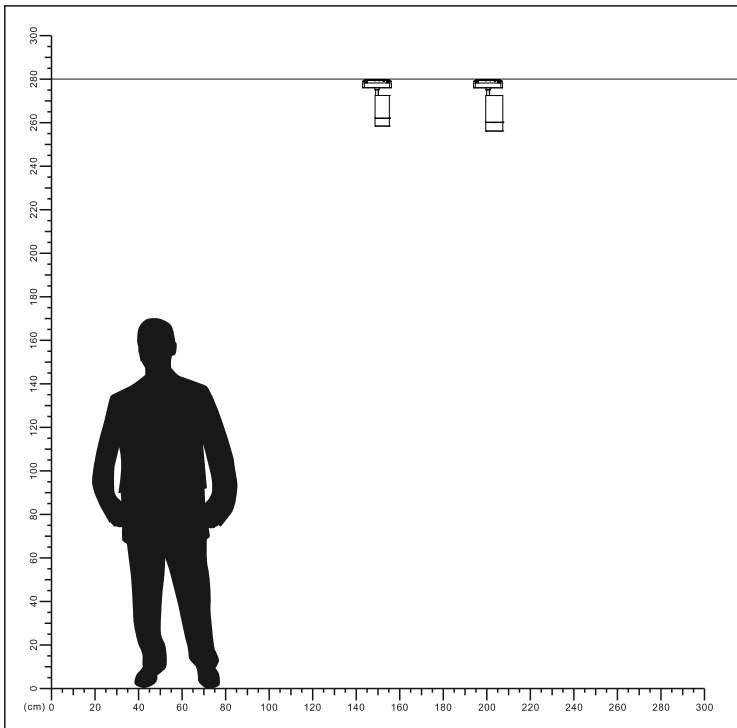


Magnetic Track System Power Supply

NR-S20-S35-PS-48V-100-DIM
IP20




Model No	P(W)	Input	Output	Dimensions in mm			
				A	B	C	
NR-S20-S35-PS-48V-100-DIM	100	AC220-240V	DC48V 2.1A	260	30	48	0.7

Dimensions in mm

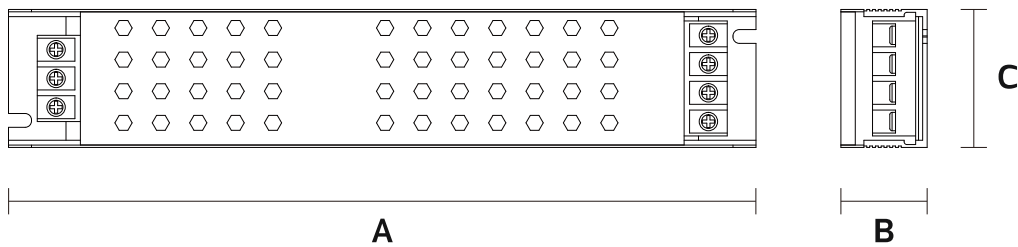


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

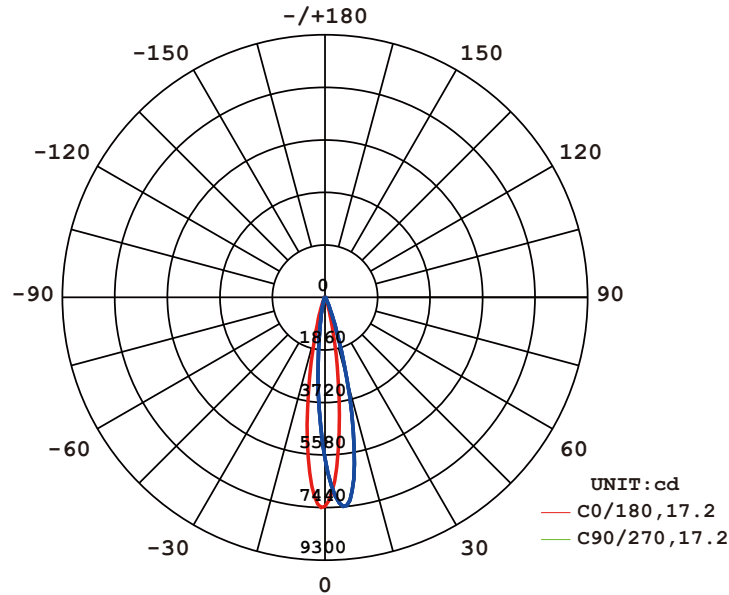


AVERAGE BEAM ANGLE (50%) :17.2 DEG

Illuminance at a Distance

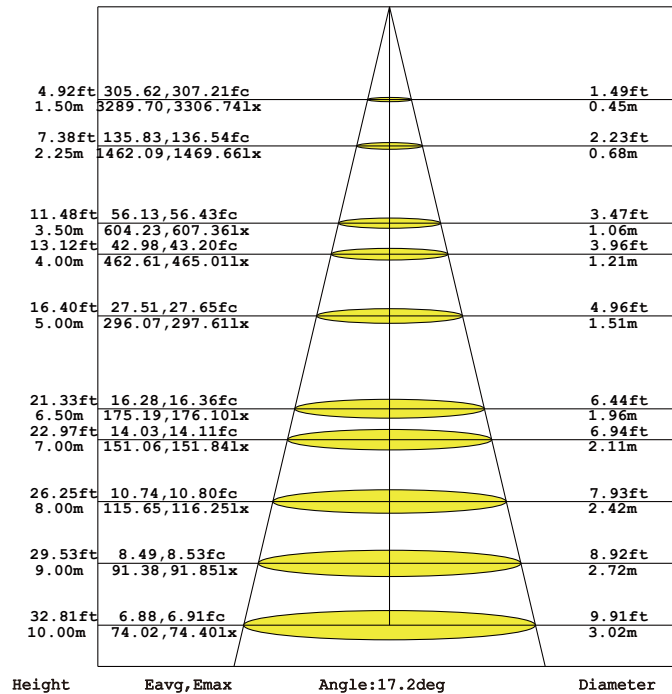


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

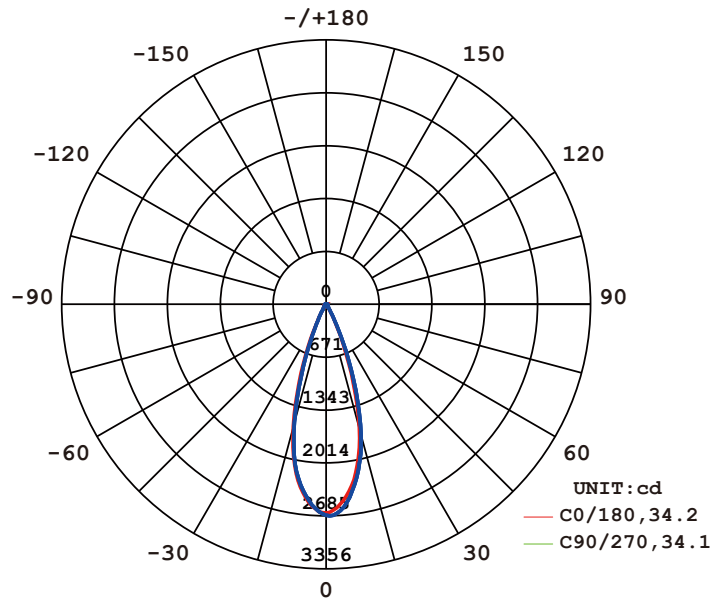


AVERAGE BEAM ANGLE (50%) : 34.2 DEG

Illuminance at a Distance

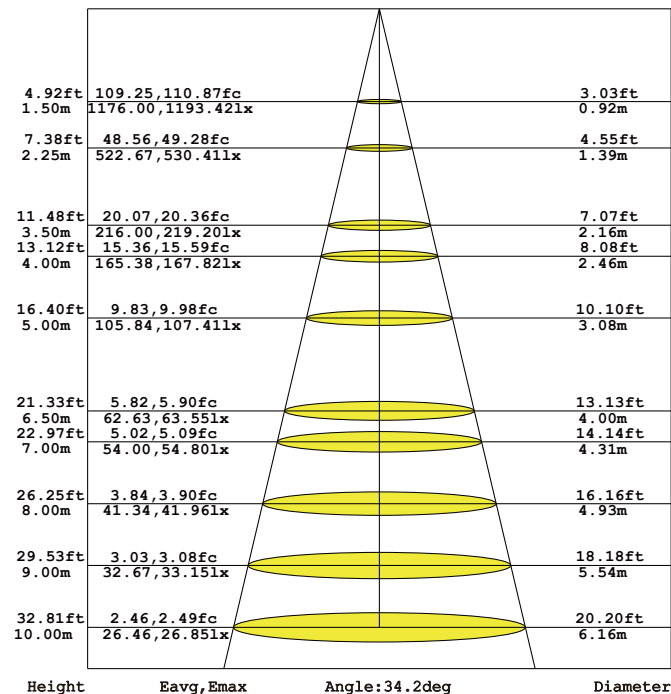


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

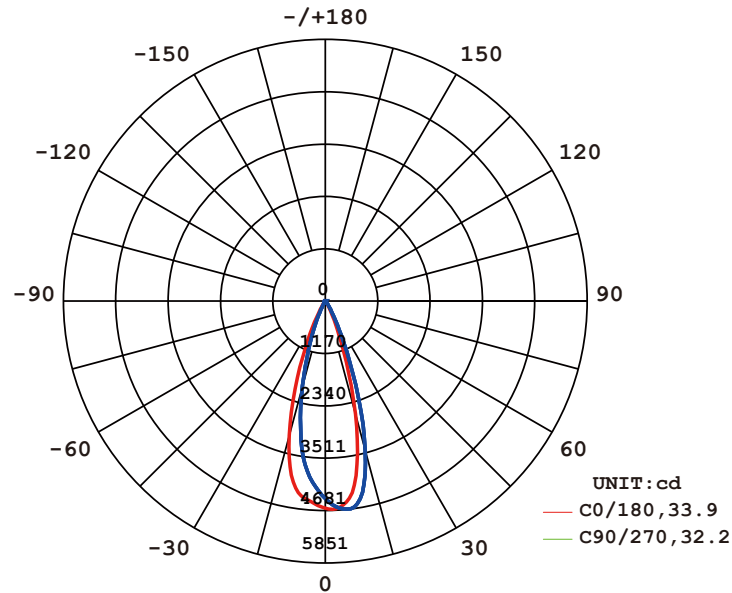


AVERAGE BEAM ANGLE (50%) : 33.9 DEG

Illuminance at a Distance


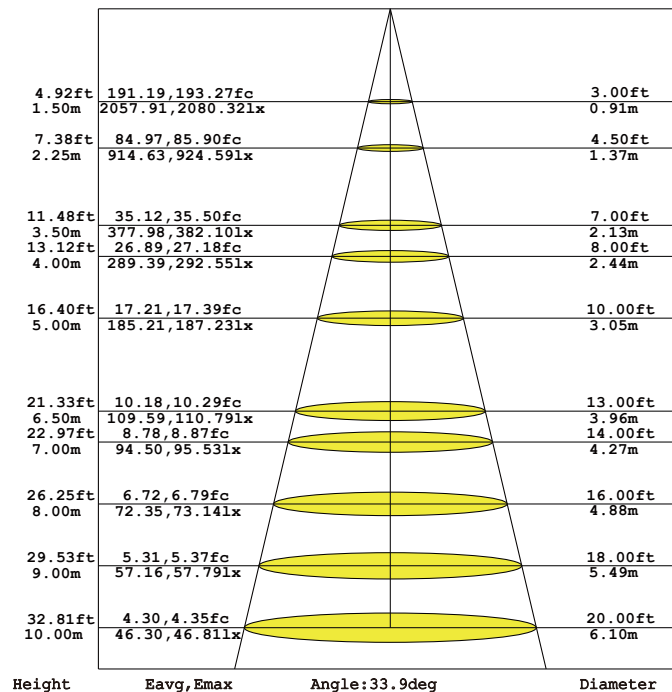


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

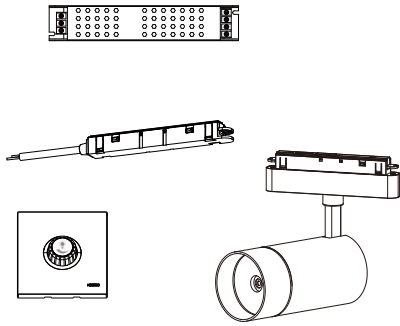


1

Turn off The Power

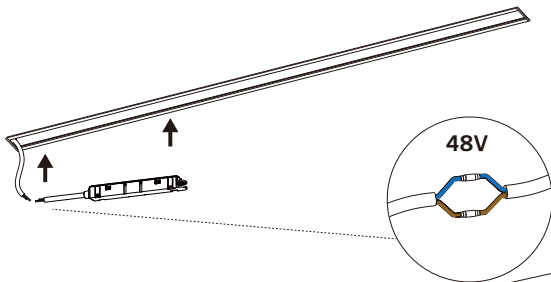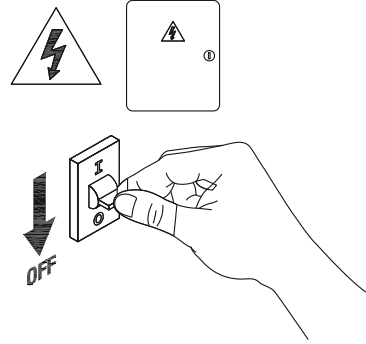


2

Terminals connect power cables and wrap terminals with waterproof tape

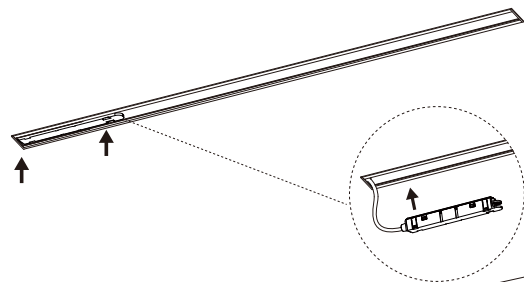


3

Installing power connectors

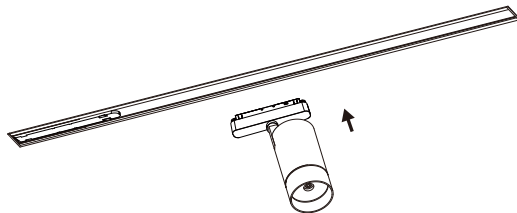


4

Install lamp

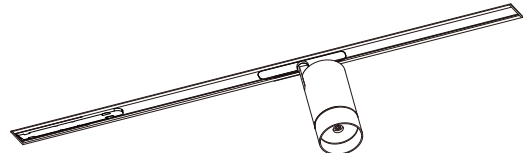


5

Installation is complete

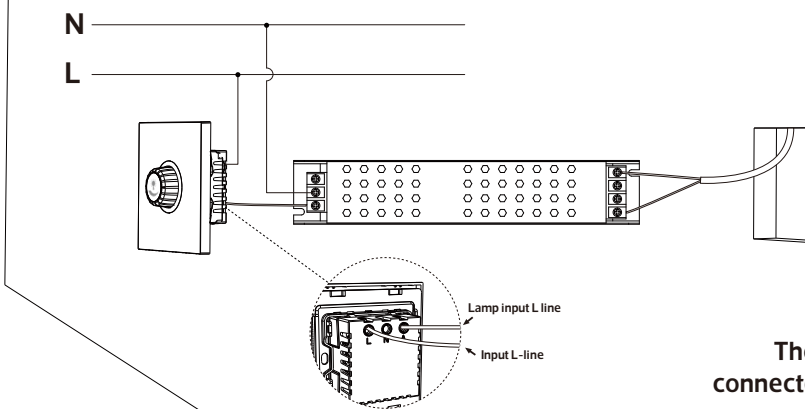


6

The dimming panel is connected to the luminaire cable



7

Turn on the power



8

Wiring diagram

