




LED Magnetic Track System


NR-MTL0401-10-BK-15D Series
IP20



Model No	P(W)	Total Lumen	CCT	Color	Using Track	Dimensions in mm			
						A	B	C	
NR-MTL0401-10-30K-BK-15D	10W	710lm	3000K	Black	NR-S20/NR-S35	150	Ø100	186	0.5
NR-MTL0401-10-40K-BK-15D	10W	710lm	4000K	Black	NR-S20/NR-S35	150	Ø100	186	0.5

Dimensions in mm

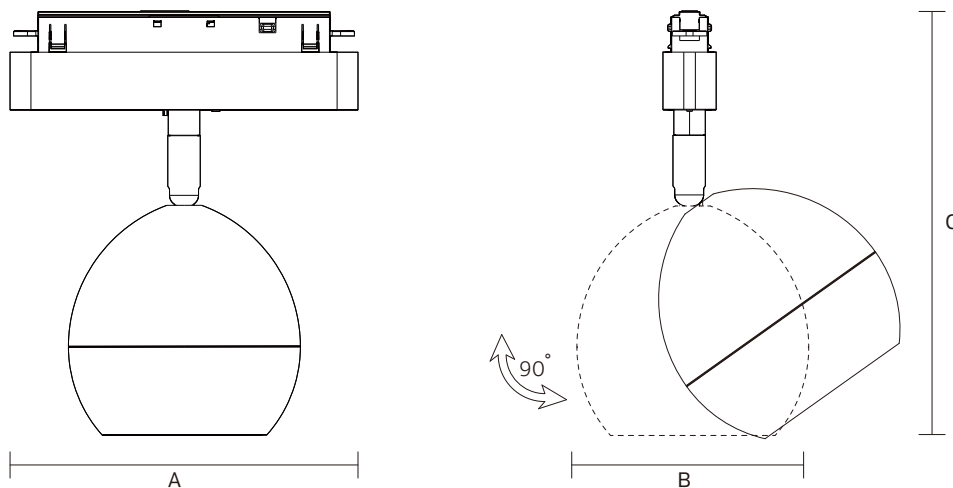


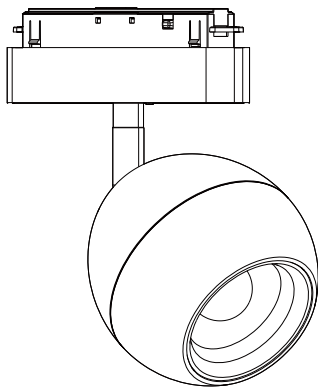


Description:
LED Magnetic Track System


Main material:
Aluminum shell

Specification:
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
Build-in LED Driver

Applications
.Office
.Meeting room
.Sitting room

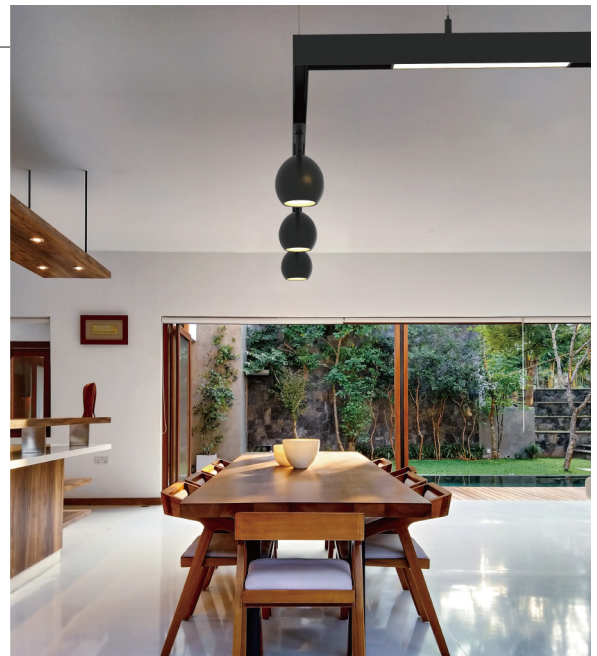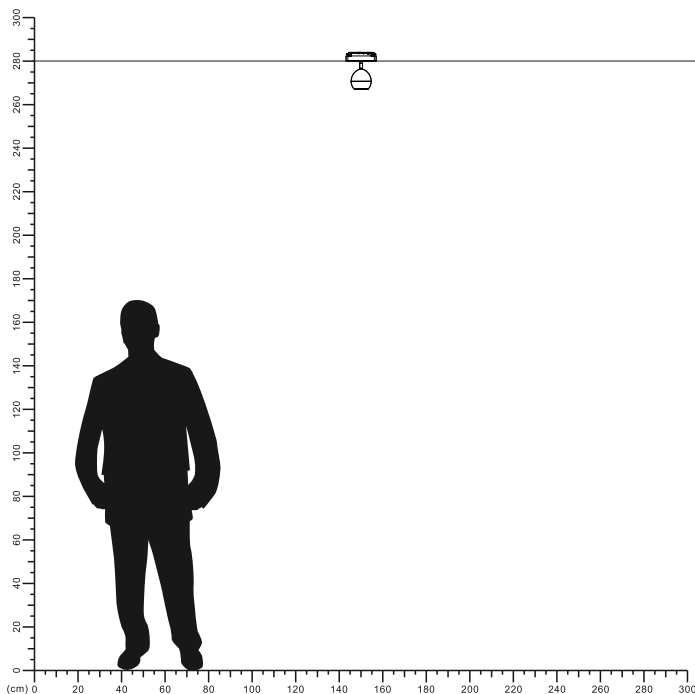


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

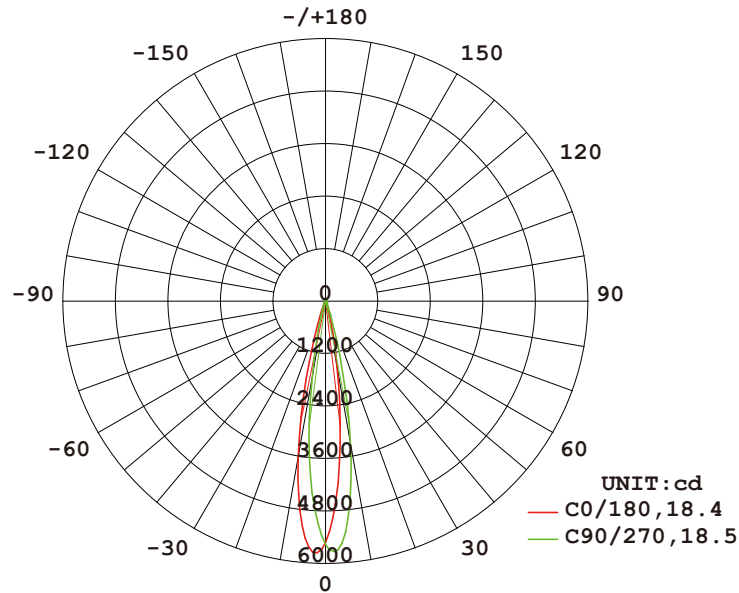


AVERAGE BEAM ANGLE (50%) : 18.5 DEG

Illuminance at a Distance

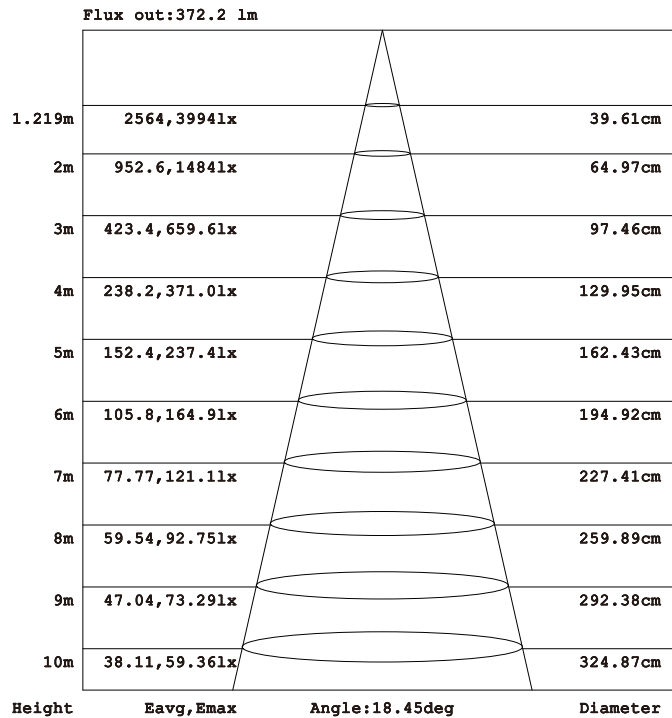


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

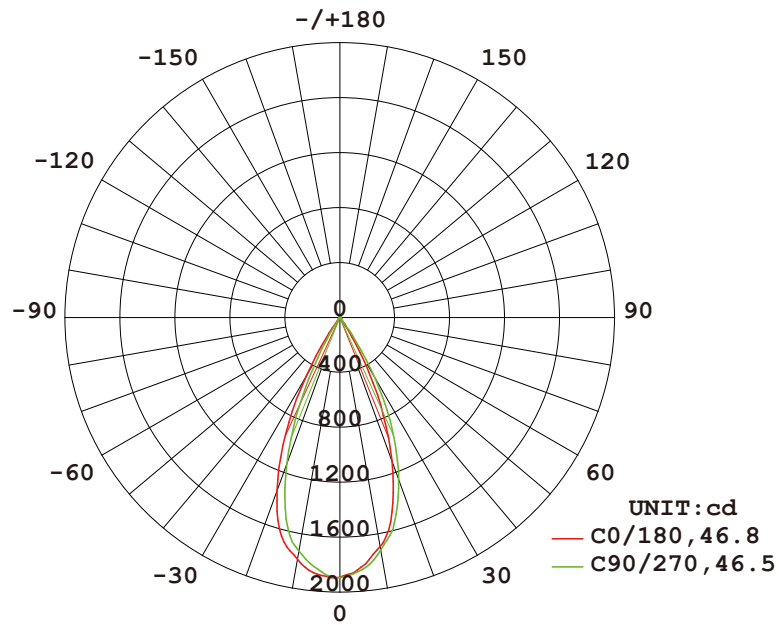


AVERAGE BEAM ANGLE (50%) : 46.7 DEG


Illuminance at a Distance

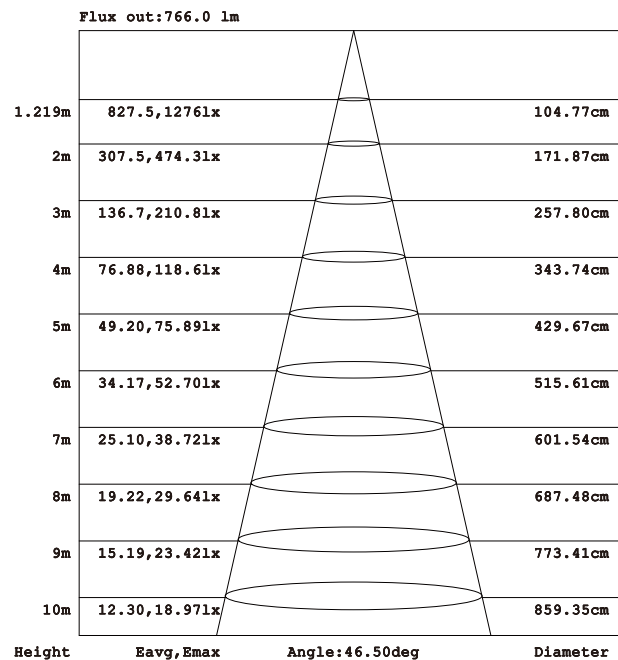

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

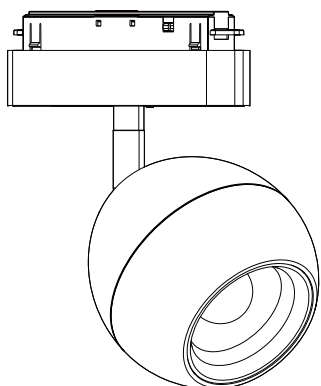


1

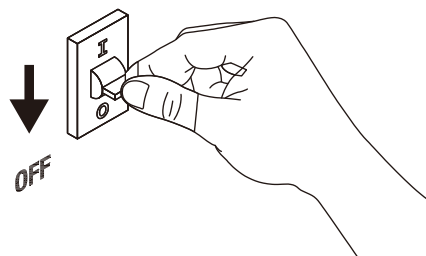


2

Turn off the power

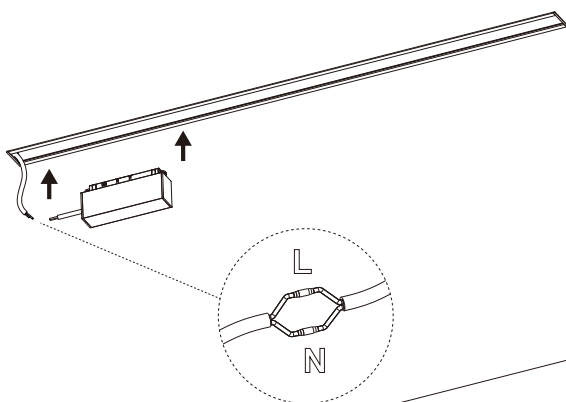


3

connect the cable

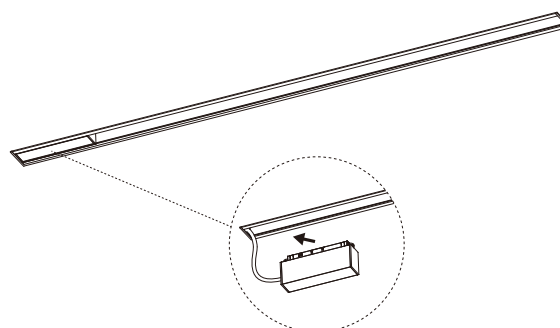


4

Install DC48V power supply

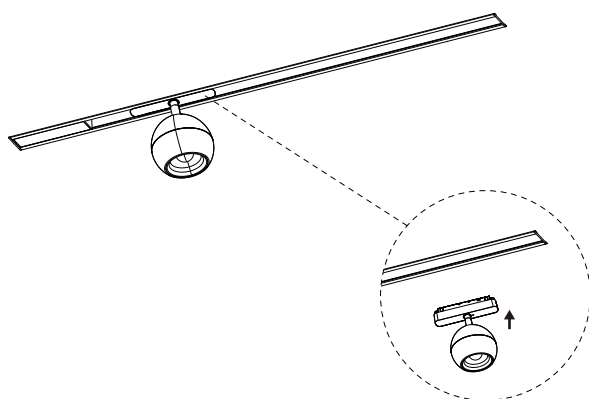

5

Install lamp the Installation is complete

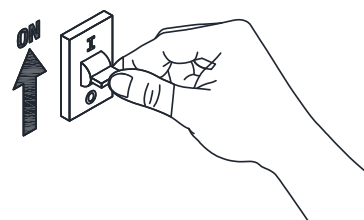

6

Turn on power

