




LED FREE DOT SYSTEM


NR-FLDL0851 Series
IP20

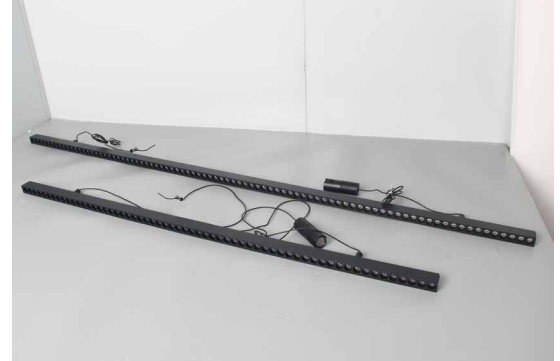

Model No	P(W)	CCT	Beam Angle	Total Lumen	Dimensions in mm			
					A	B	C	
NR-FLDL0851-30-30K-BK-24D	30	3000K	24°	2220	1191	22.5	950	0.38
NR-FLDL0851-40-30K-BK-24D	40	3000K	24°	2960	1514	22.5	950	0.61

Dimensions in mm

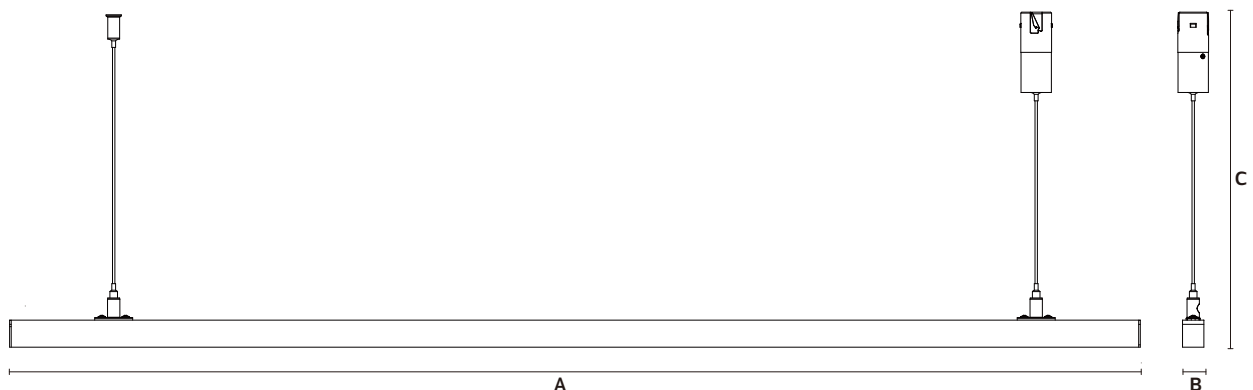


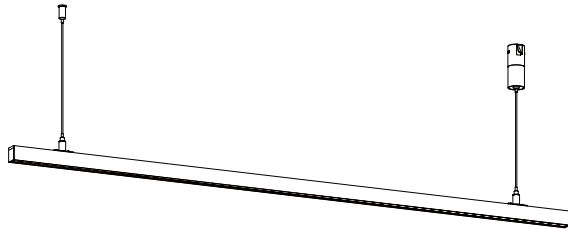


Description:
LED FREE DOT SYSTEM

Main material:
Aluminum+PC

Specification:
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
Build-in LED Driver

Applications
.Office
.Meeting room
.Sitting room

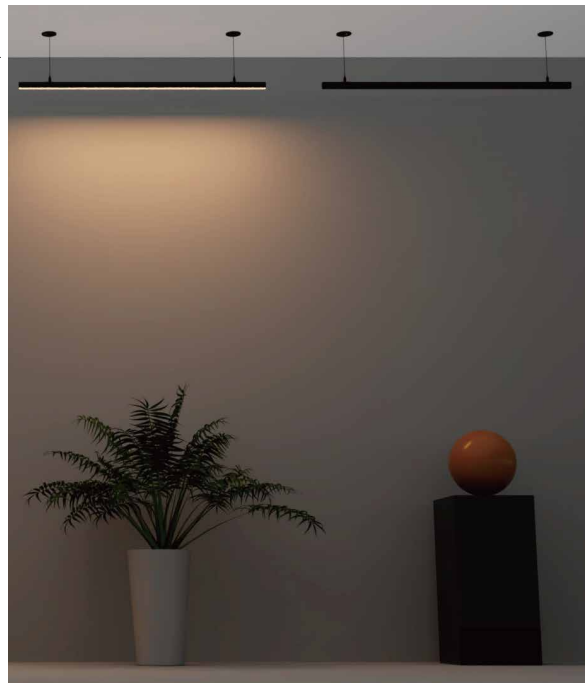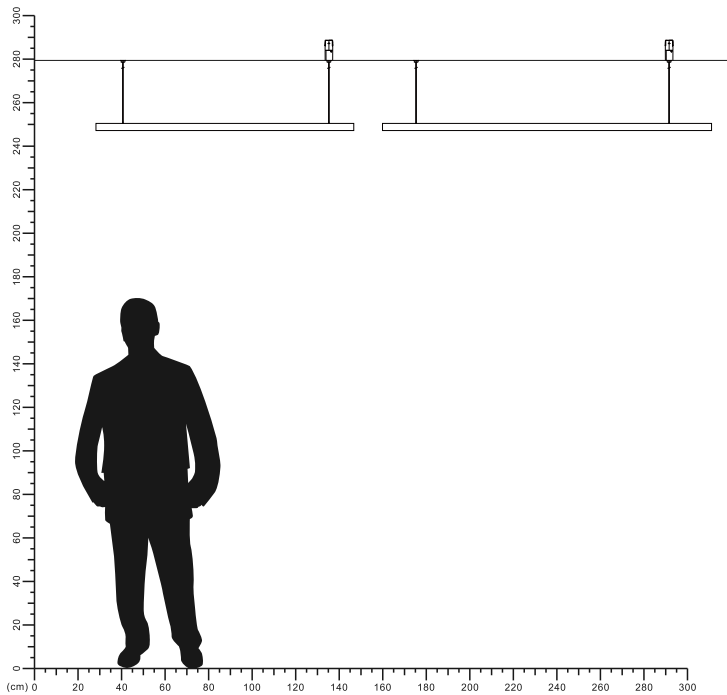

LED FREE DOT SYSTEM

NRP-FD-BASE


IP20






Model No	Input Voltage	Rated Current	Power	Color	Materials	Hole Size (mm)	kg
NRP-FD-TRM-70	DC48V	3A	150W	Black	Aluminum +PC	Φ50mm	0.16
NRP-FD-BASE-60	DC48V	3A	150W	Black	Aluminum +PC	Φ50mm	0.16

*Suitable for constant voltage DC48V power supply only


Dimensions in mm








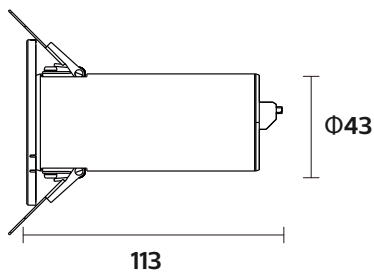


NRP-FD-TRM-70

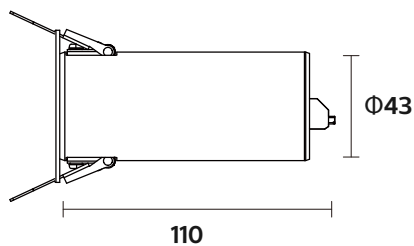

NRP-FD-BASE-60



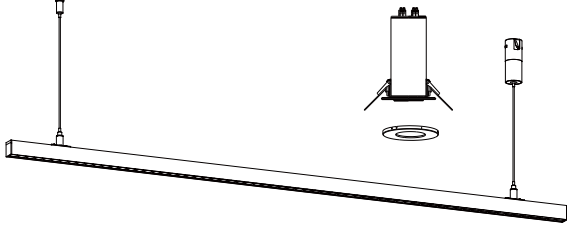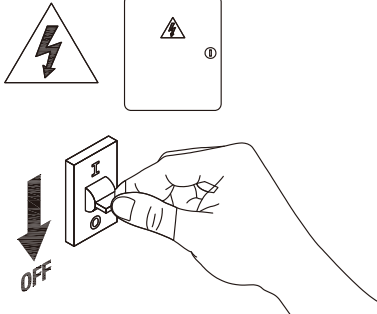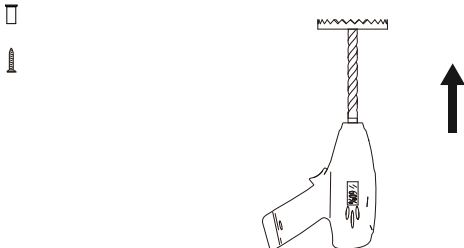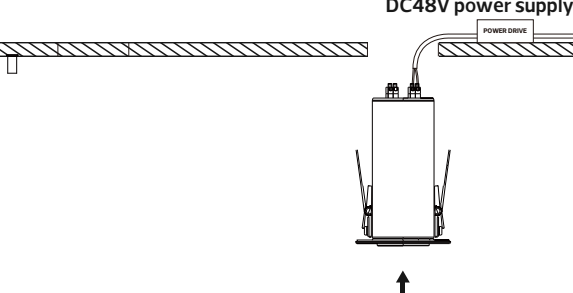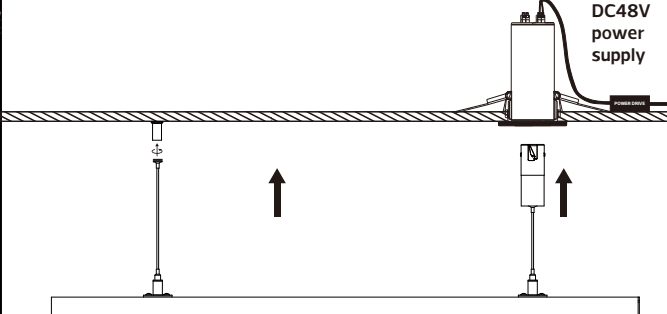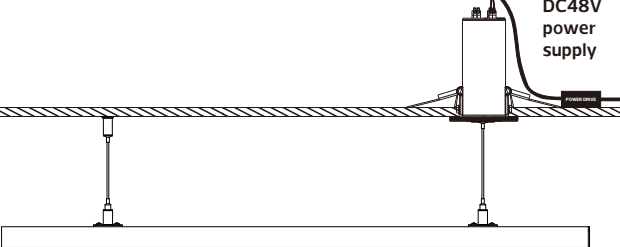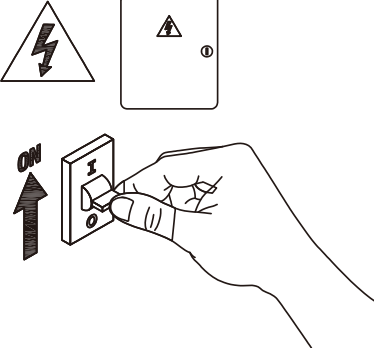	 1 Turn off the power
 2 Cut two $\Phi 50$ hole in the ceiling and fixed base	 3 Press the button to insert the cable
 4 Buckle automatically fall down	 5 Push the lamp body stuck into the base (push the lamp body can be removed)
 6 After installation, the dropped line length can be adjusted according to the floor height	 7 Turn on power

