




LED FREE DOT SYSTEM


NRP-FFTL0951 Series
IP20



Model No	P(W)	CCT	Total Lumen	lm/w	Color	Dimensions in mm			
						A	B	C	
NRP-FFTL0951-30-30K-BK-24D	30W	3000K	2220lm	74lm/w	Black	881	32	950	1.06
NRP-FFTL0951-30-40K-BK-24D	30W	4000K	2550lm	85lm/w	Black	881	32	950	1.06
NRP-FFTL0951-40-30K-BK-24D	40W	3000K	3200lm	80lm/w	Black	1312	32	950	1.4
NRP-FFTL0951-40-40K-BK-24D	40W	4000K	3400lm	85lm/w	Black	1312	32	950	1.4

Dimensions in mm




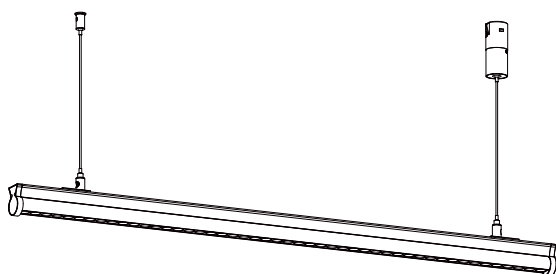


Description:
LED FREE DOT SYSTEM


Main material:
Aluminum+PC

Specification:
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
Build-in LED Driver


Applications
.Office
.Meeting room
.Sitting room

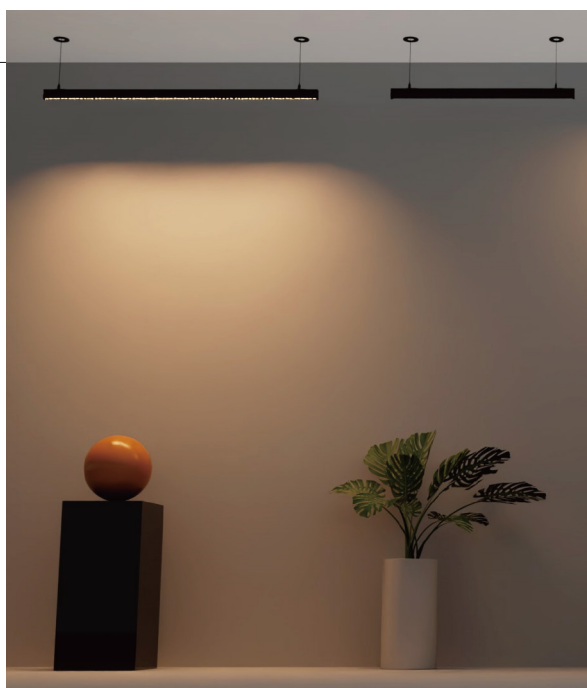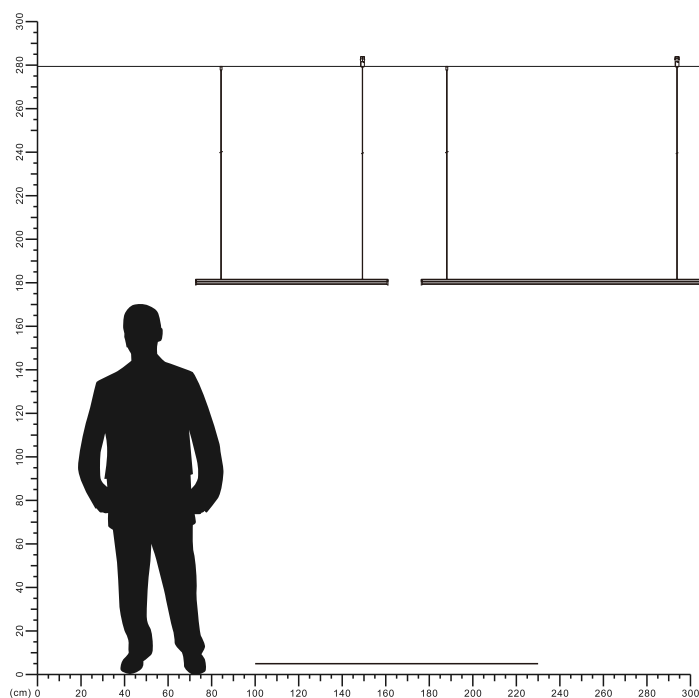


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

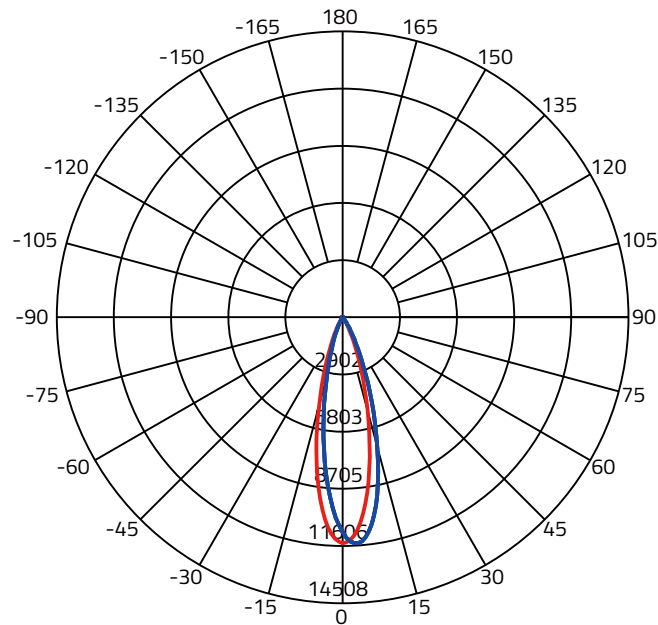

Illuminance at a Distance

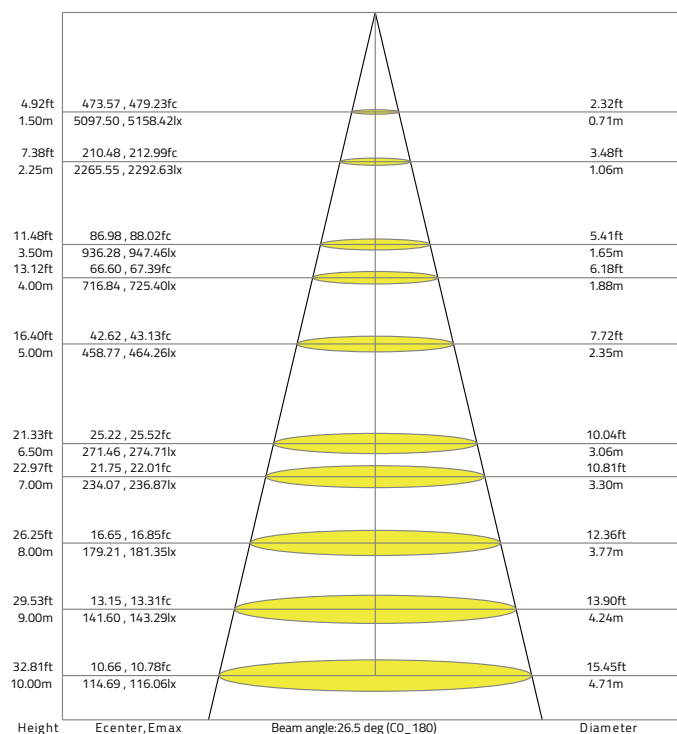


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

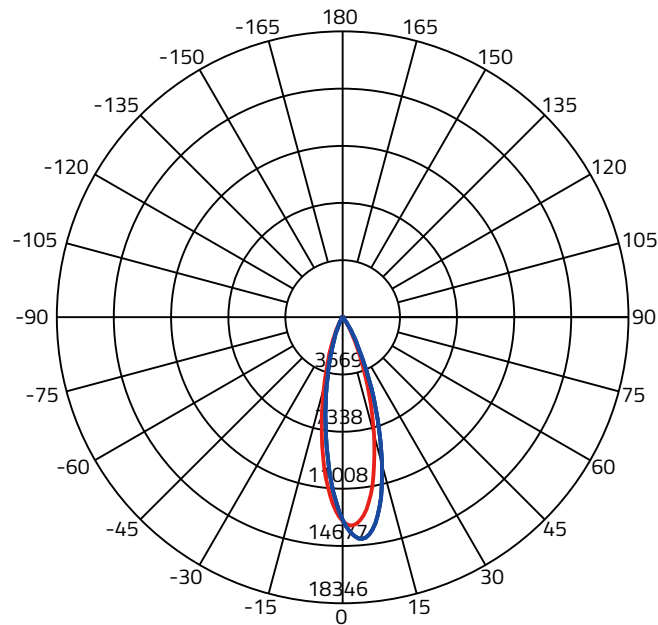

Beam Angle(50%) C0-180,C90-270: 28.2 deg,27.4 deg

C0-180 — C90-270 —


Illuminance at a Distance

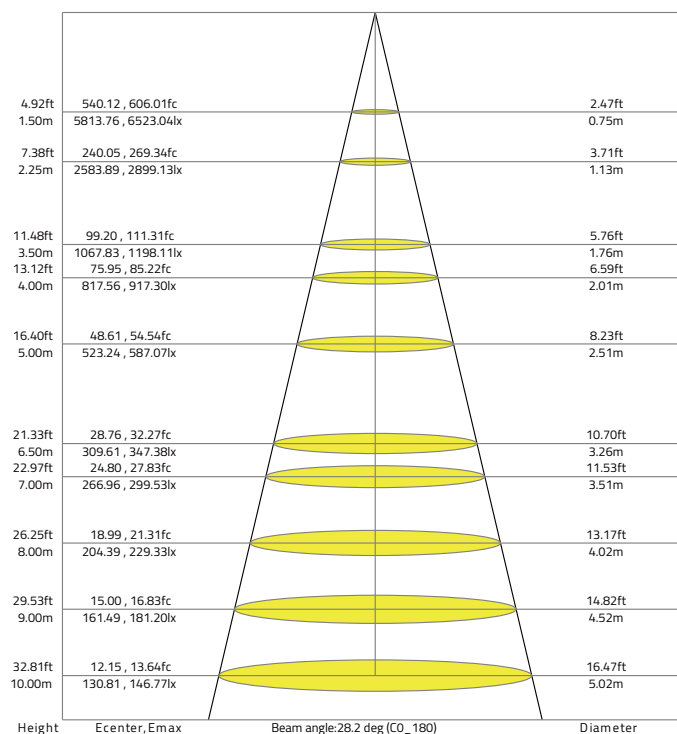

LED FREE DOT SYSTEM

NRP-FD-BASE

IP20

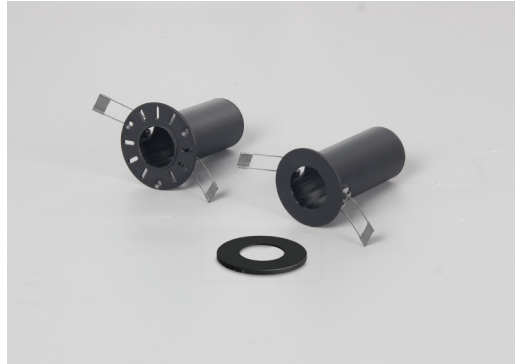



RoHS

Item Code	Materials	Hole Size (mm)	
NRP-FD-TRM-70	Aluminum +PC	Φ50mm	0.1
NRP-FD-BASE-60	Aluminum +PC	Φ50mm	0.1

*Suitable for constant voltage DC48V power supply only



Dimensions in mm

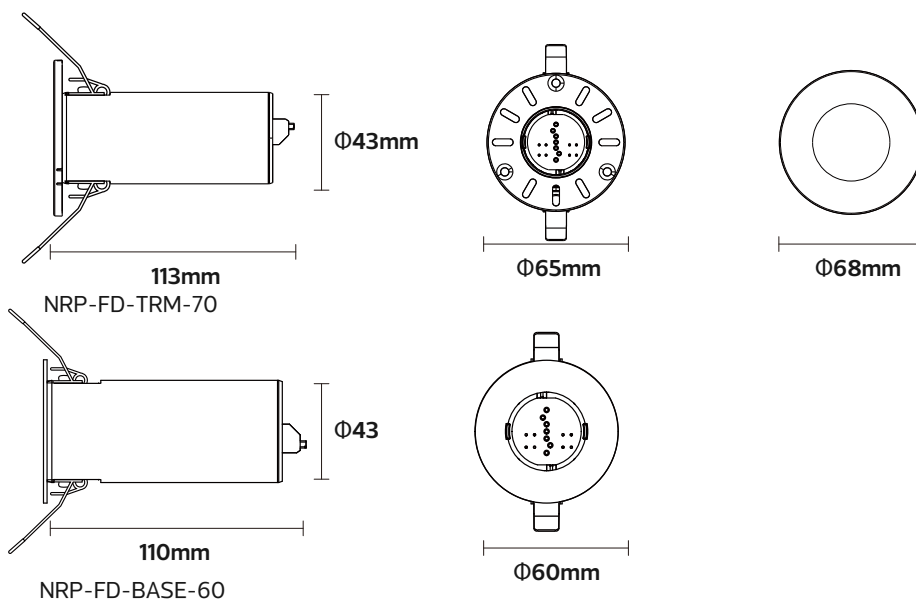

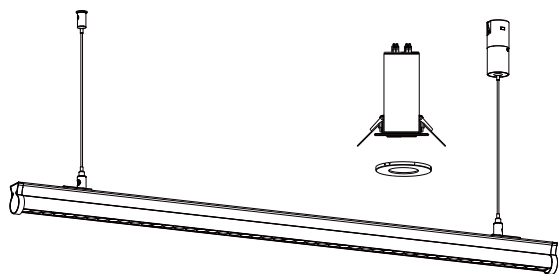

1

Turn off the power

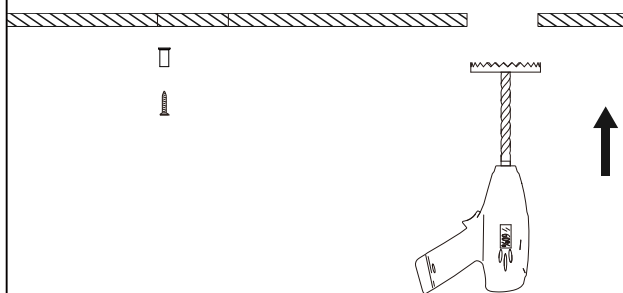
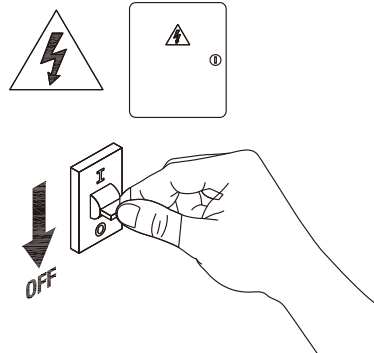


2

Cut two $\Phi 50$ hole in the ceiling and fixed base

3

Press the button to insert the cable

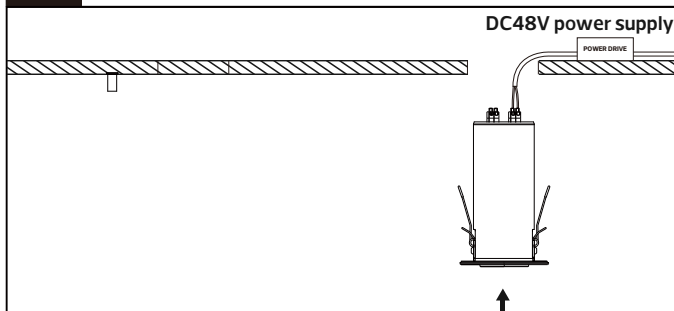
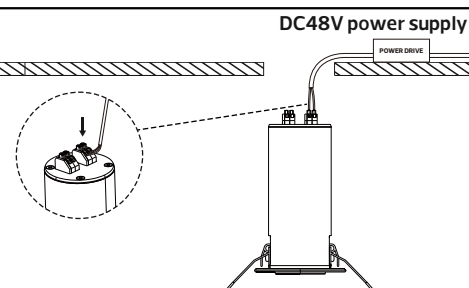


4

Buckle automatically fall down

5

Push the lamp body stuck into the base to fix (push the lamp body can be removed)

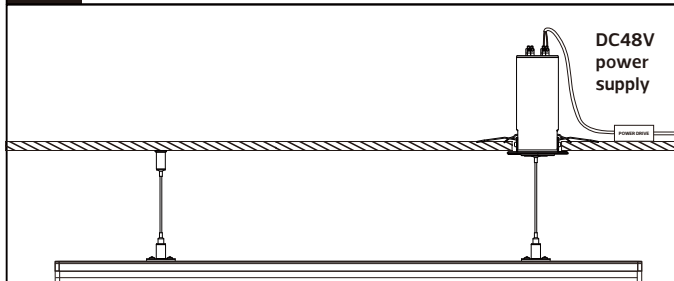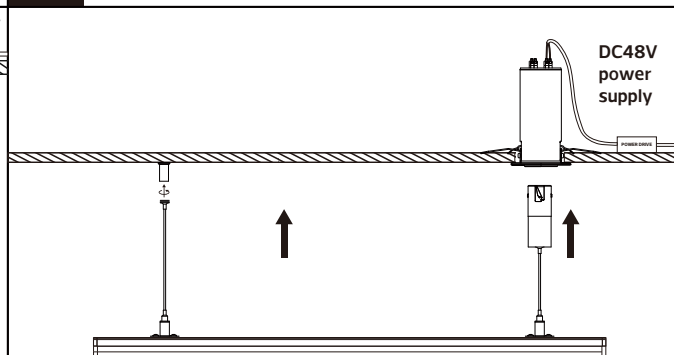

6

After installation, the dropped line length can be adjusted according to the floor height

7

Turn on power

