



LED FREE DOT SYSTEM


NRP-FST0801-15-30K


IP20



Model No	P (W)	Using Base	Beam Angle	Total Lumen	Dimensions in mm			
					A	B	C	
NRP-FST0801-15-30K	15	NR-FD-BASE	300°	1350	2000	Φ32	86	1.02

Dimensions in mm

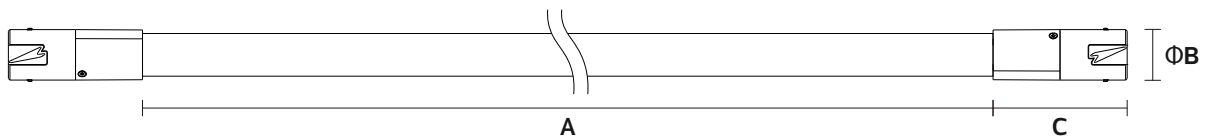

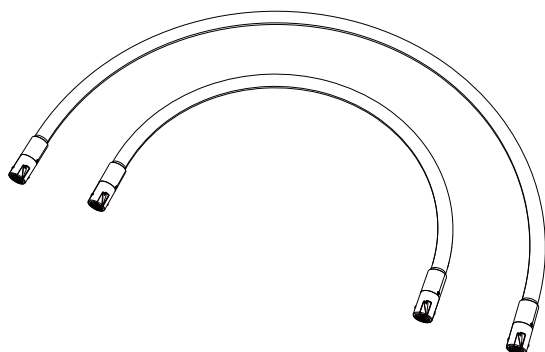


Description:
Combination Of Embedded Lamps


Main material:
Die-cast aluminum + Silica gel+PC

Specification:
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
Build-in LED Driver

Applications
.Office
.Meeting room
.Sitting room

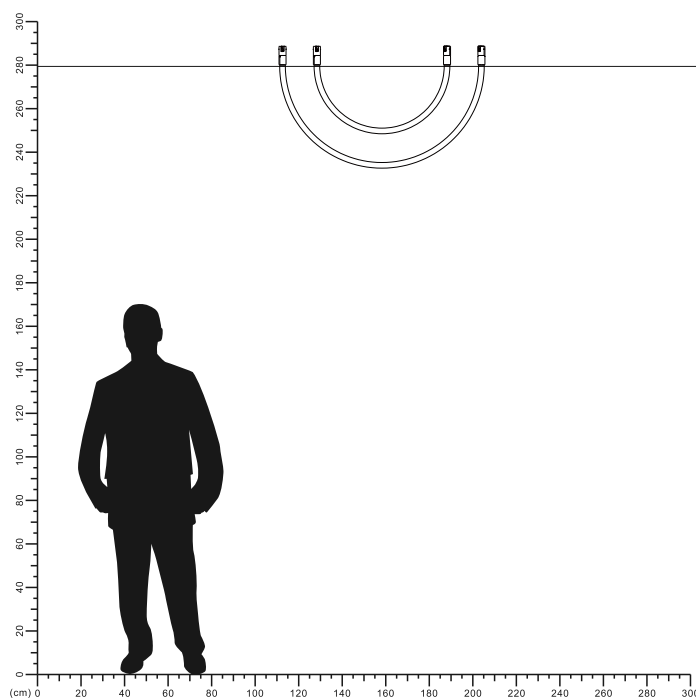


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

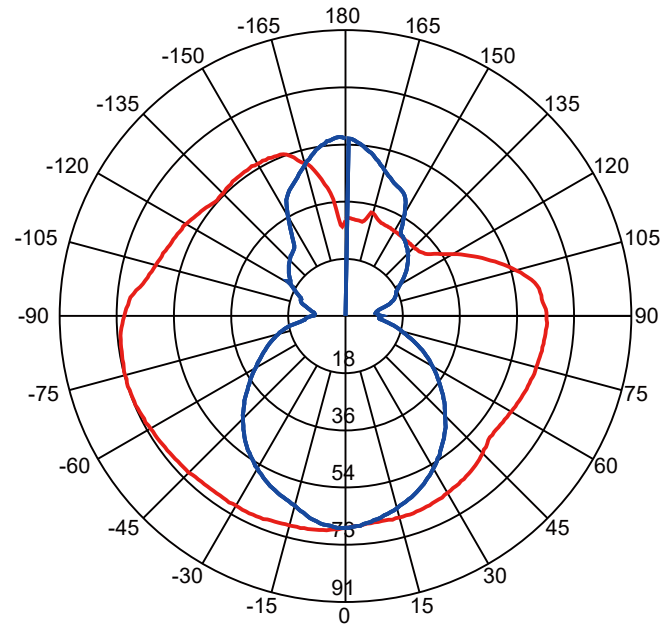

Beam Angle(50%) C0-180,C90-270: 297.2 deg,327.8 deg

C0-180 — C90-270 —

Illuminance at a Distance

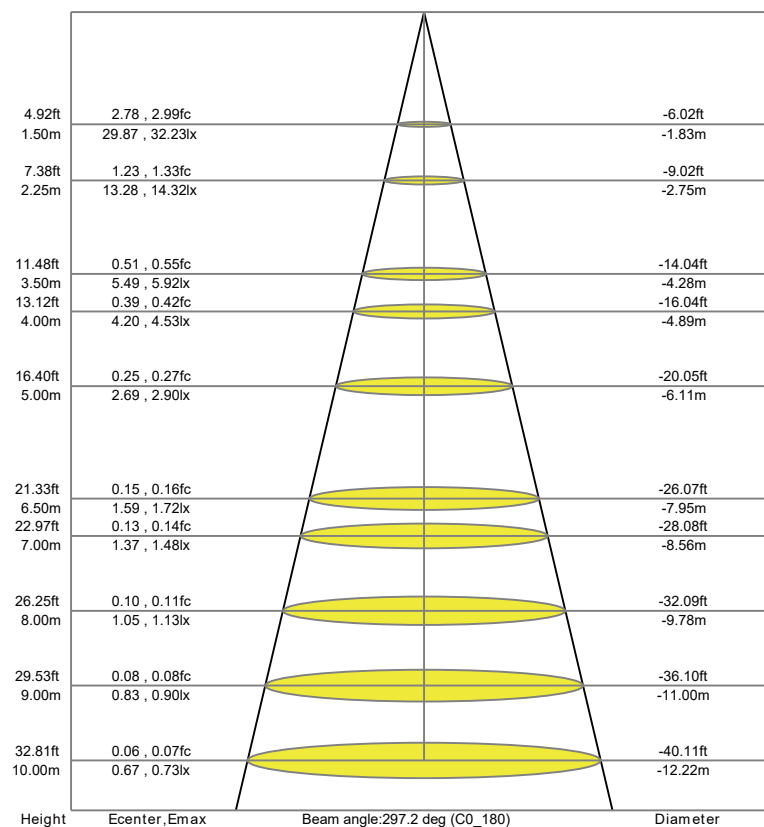

LED FREE DOT SYSTEM

NRP-FD-BASE


IP20






Item Code	Materials	Hole Size (mm)	
NRP-FD-TRM-70	Aluminum +PC	Φ50mm	0.16
NRP-FD-BASE-60	Aluminum +PC	Φ50mm	0.16

*Suitable for constant voltage DC48V power supply only

Dimensions in mm

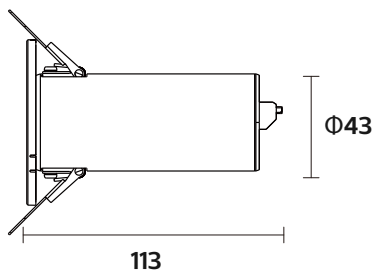

NRP-FD-TRM-70

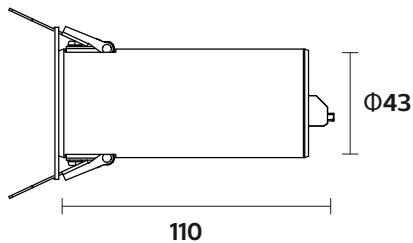

NRP-FD-BASE-60

