LED TracK Light

NR-TL101-DALI Series

IP20

Indoor | AC 100-240V | 50/60 Hz | PF ≥0.8 | CCT 6500K 4000K 3000K | Ra ≥80 | IP20 | Chips COB

Item Code	P(W)	CCT(K)	LM/W	Total Lumen	Beam Angle	Dimensions in mm A	B	C	kg
NR-TL101-10W-DALI	10	3000/4000/6500	85	850	24°	63	124	187	0.40
NR-TL101-20W-DALI	20	3000/4000/6500	80	1600	24°	85	146	202	0.62
NR-TL101-30W-DALI	30	3000/4000/6500	90	2700	24°	95	177	230	0.92

Dimensions in mm

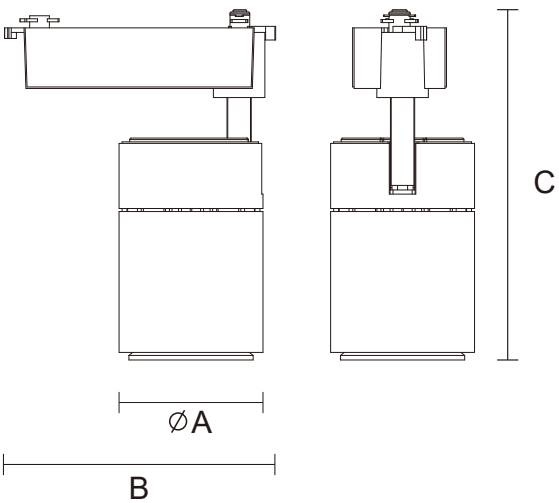

Surface TracKer

Item Code	Color	Installation Type	Dimensions in mm A	B	C	kg
NR-TL110-1-M-WH-DALI	White	Surface	1000	34	20	0.41
NR-TL110-1-M-BK-DALI	BlacK	Surface	1000	34	20	0.41
NR-TL110-2-M-WH-DALI	White	Surface	2000	34	20	0.84
NR-TL110-2-M-BK-DALI	BlacK	Surface	2000	34	20	0.84
NR-TL110-7-M-WH-DALI	White	Surface	7000	34	20	3.10
NR-TL110-7-M-BK-DALI	BlacK	Surface	7000	34	20	3.10

Dimensions in mm

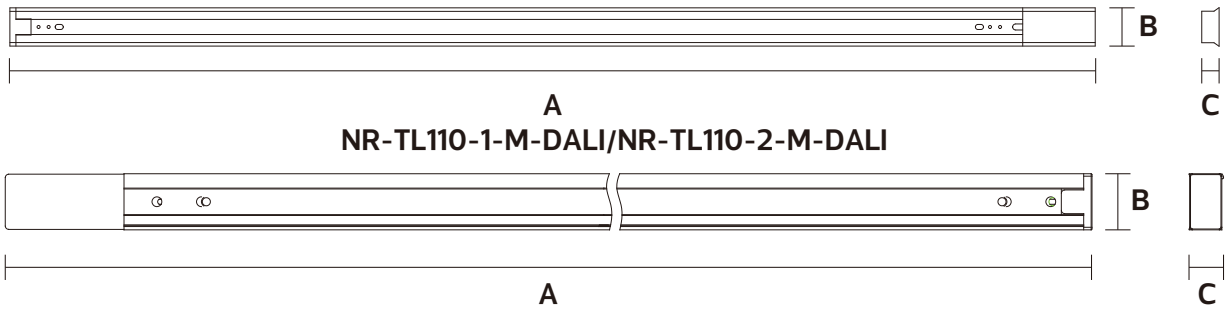

Recessed TracKer

Item Code	Color	Dimensions in mm A	B1	B2	C	kg
NR-CTL110-1-M-W-DALI	White	1000	33.5	60	20	0.44
NR-CTL110-1-M-BK-DALI	BlacK	1000	33.5	60	20	0.44
NR-CTL110-2-M-W-DALI	White	2000	33.5	60	20	0.88
NR-CTL110-2-M-BK-DALI	BlacK	2000	33.5	60	20	0.88

Dimensions in mm

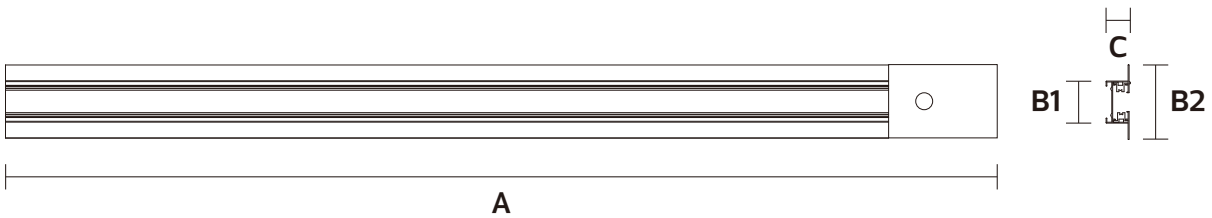

Surface TracKer Accessories

Item Code	Color	Dimensions in mm A	Dimensions in mm B	kg
NR-TL120-90-W	White	66	66	0.03
NR-TL120-90-BK	BlacK	66	66	0.03
NR-TL120-180-W	White	95	36	0.06
NR-TL120-180-BK	BlacK	95	36	0.06
NR-TL120-270-W	White	95	66	0.08
NR-TL120-270-BK	BlacK	95	66	0.08
NR-TL120-360-W	White	95	95	0.10
NR-TL120-360-BK	BlacK	95	95	0.10
NR-TL120-W	White	210	32	0.03
NR-TL120-BK	BlacK	210	32	0.03

Dimensions in mm



NR-TL120-90



NR-TL120-180



NR-TL120-270



NR-TL120-360

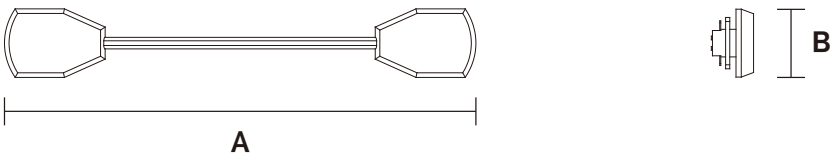

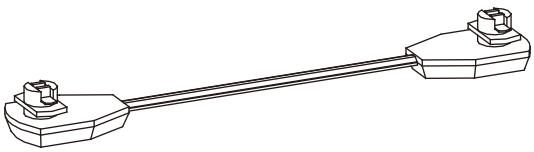

NR-TL120-W/NR-TL120-BK

Surface TracKer Accessories

Item Code	Color	Dimensions in mm A	B	C	kg
NR-TL120-ACS-WH	White	45	31.8	9	0.02
NR-TL120-ACS-BK	BlacK	45	31.8	9	0.02
NR-TL120-ACS	Copper	24.6	11.2	/	0.02

Dimensions in mm

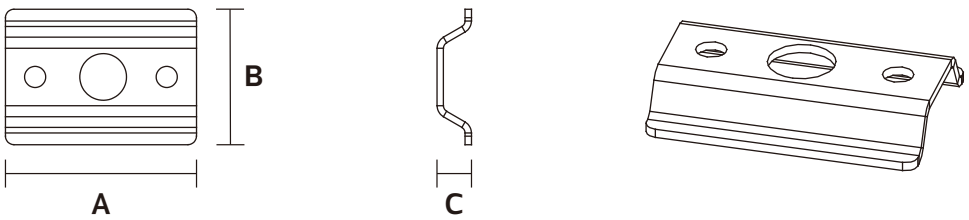

NR-TL120-ACS-WH/NR-TL120-ACS-BK

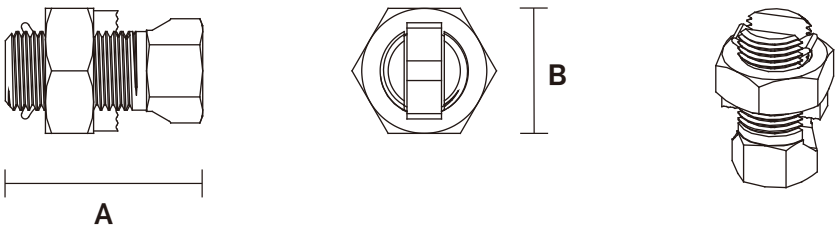

NR-TL120-ACS

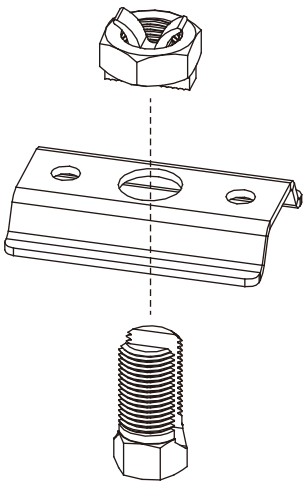

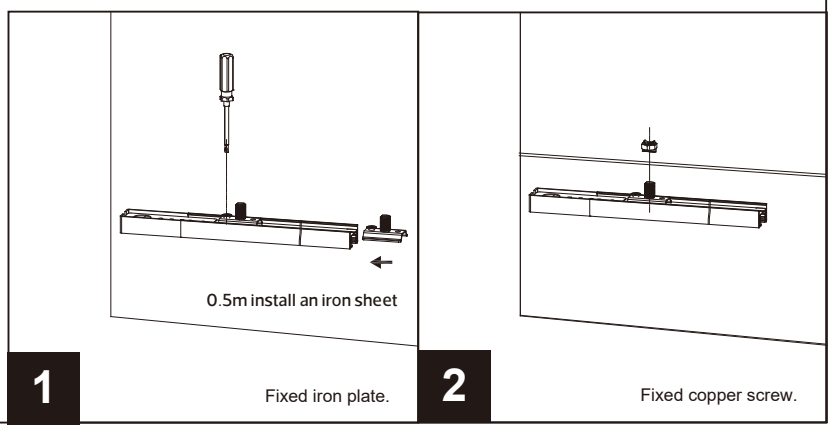

Recessed TracKer Accessories

Item Code	Color	Dimensions in mm A	Dimensions in mm B	kg
NR-CTL120-90-W	White	66	66	0.03
NR-CTL120-90-BK	BlacK	66	66	0.03
NR-CTL120-180-W	White	95	36	0.06
NR-CTL120-180-BK	BlacK	95	36	0.06
NR-CTL120-T-W	White	95	66	0.08
NR-CTL120-T-BK	BlacK	95	66	0.08
NR-CTL120-CROSS-W	White	95	95	0.10
NR-CTL120-CROSS-BK	BlacK	95	95	0.10
NR-CTL120-ACS	BlacK	95	66	0.10

Dimensions in mm



NR-CTL120-90



NR-CTL120-180



NR-CTL120-T



NR-CTL120-CROSS



NR-CTL120-ACS

High lumen optical lens

Multi - direction adjustable Angle

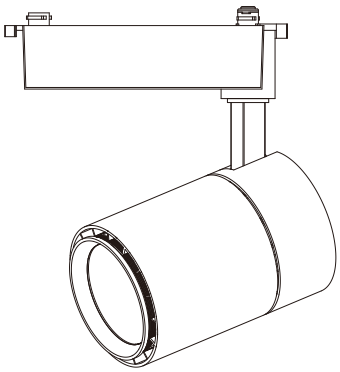

Description:
LED TracK Light

Main material:
Engineering plastic high quality aluminum.

Specification:
Energy saving,up to 85% energy saving comparing to standard halogen and in candescent lamps Long life,up to 30,000 hours High quality light, High color rending, less heat, no UV or IR radiation Build-in LED driver.

Applications
.Shopping mall
.Office buildings
.Exhibition hall
.Public lighting places

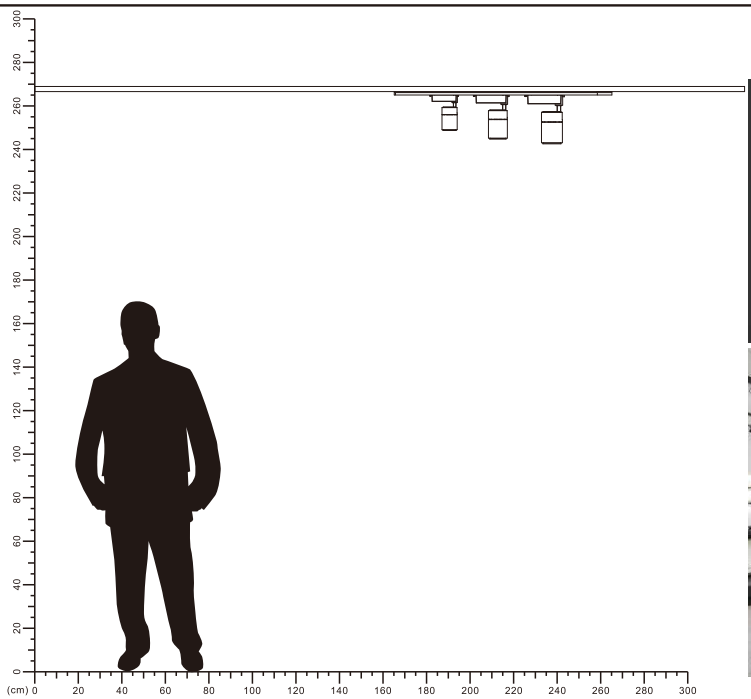

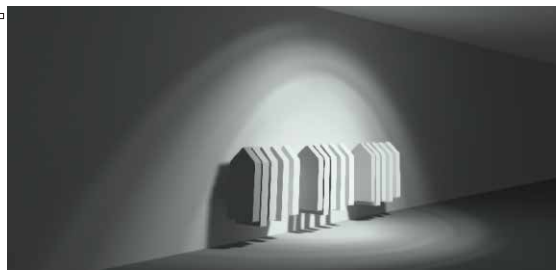

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

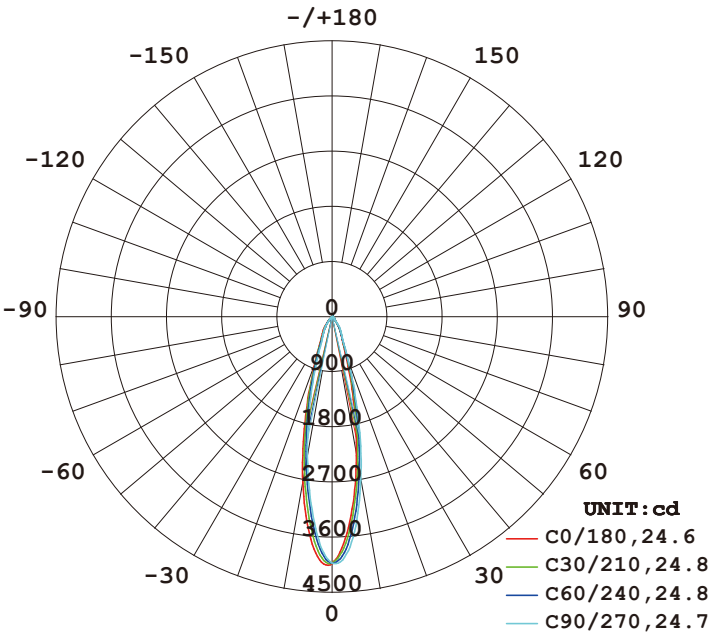

AVERAGE BEAM ANGLE(50%):24.7 DEG

Illuminance at a Distance

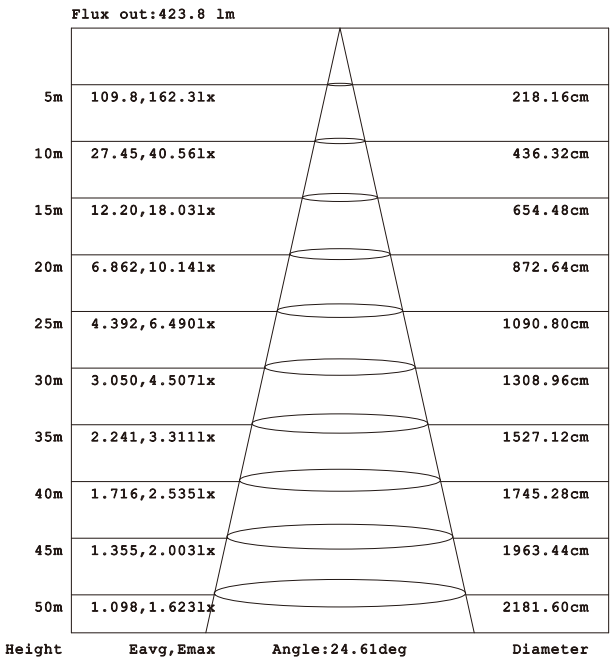

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Item Code:NR-TL101-10W-DALI

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

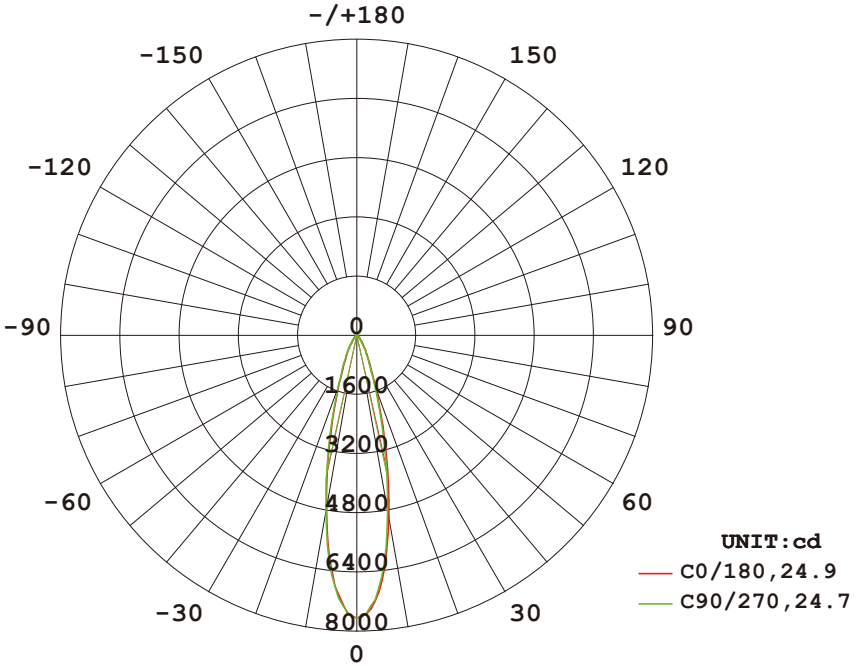

AVERAGE BEAM ANGLE(50%):24.8 DEG

Illuminance at a Distance

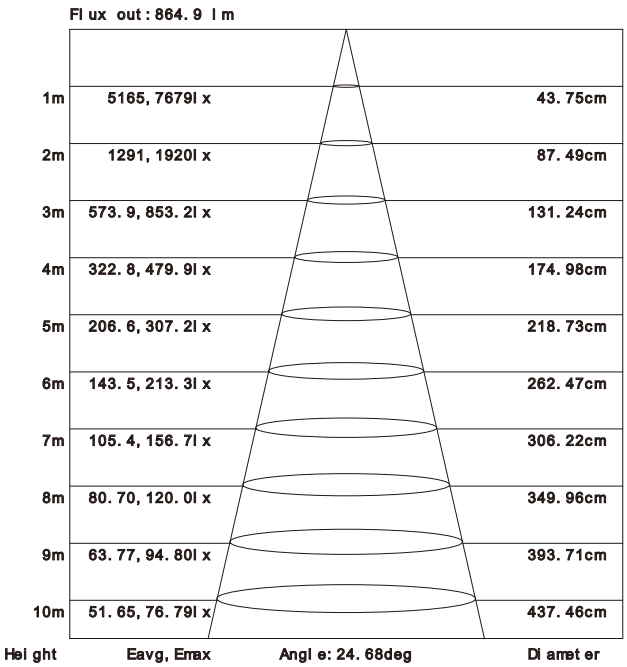

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Item Code:NR-TL101-20W-DALI

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

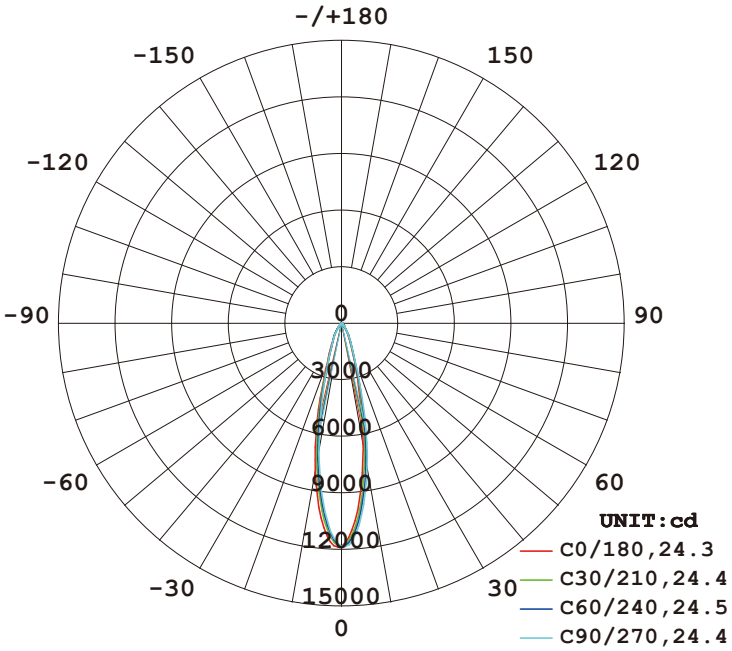

AVERAGE BEAM ANGLE(50%):24.4 DEG

Illuminance at a Distance

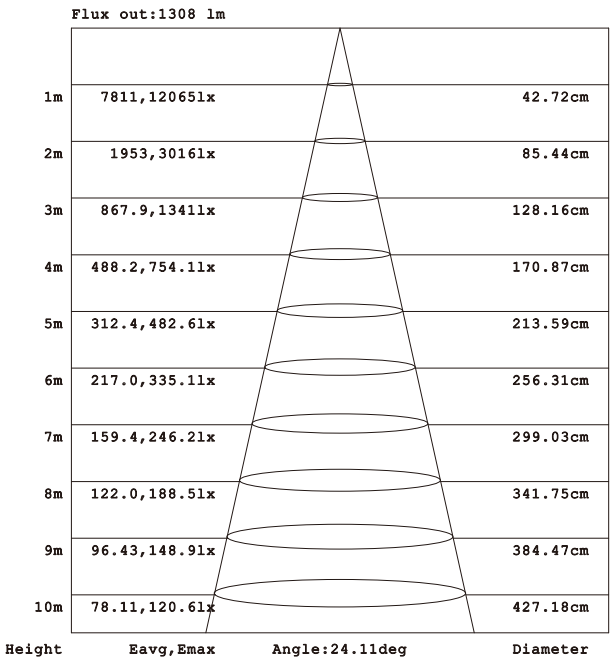

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Item Code:NR-TL101-30W-DALI

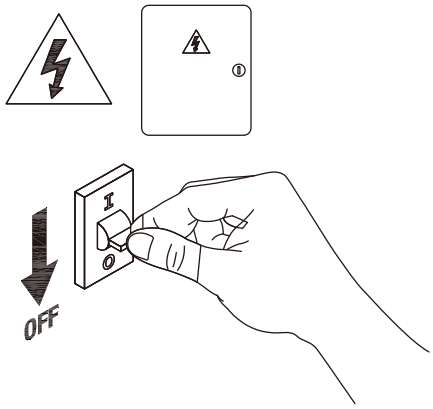

1 Turn off the power.



2 Drill 2 hole on your ceiling.

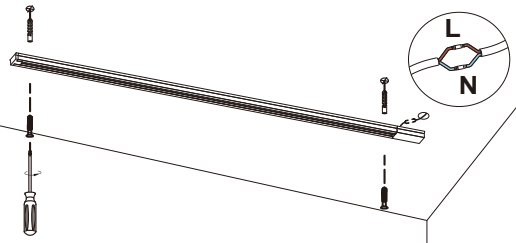

3 Install the track and connect the cable.

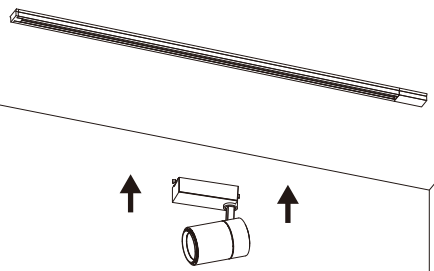

4 Install the track light.