





LED TRACK LIGHT



NR-TL0153 Series
IP20



Model No	Watt	CCT(K)	Output (lm)	lm/w	Color	Dimensions in mm				
						A	B	C	D	
NR-TL0153-10-30K-BK-24D	10W	3000K	710lm	71lm/w	Black	158	Φ55	140	200	0.28
NR-TL0153-10-30K-WH-24D	10W	3000K	710lm	71lm/w	White	158	Φ55	140	200	0.28
NR-TL0153-20-30K-BK-24D	20W	3000K	1480lm	74lm/w	Black	158	Φ65	150	210	0.35
NR-TL0153-20-30K-WH-24D	20W	3000K	1480lm	74lm/w	White	158	Φ65	150	210	0.35
NR-TL0153-30-30K-BK-24D	30W	3000K	2220lm	74lm/w	Black	158	Φ80	175	236	0.5
NR-TL0153-30-40K-WH-24D	30W	4000K	2220lm	74lm/w	White	158	Φ80	175	236	0.5

Dimensions in mm

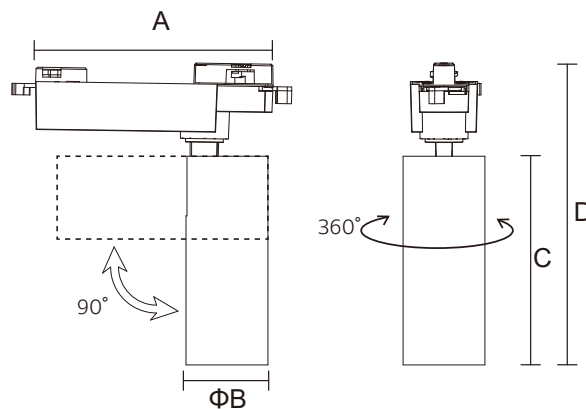

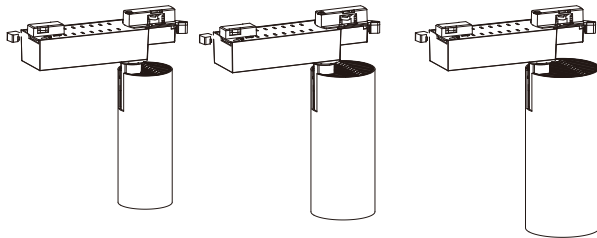
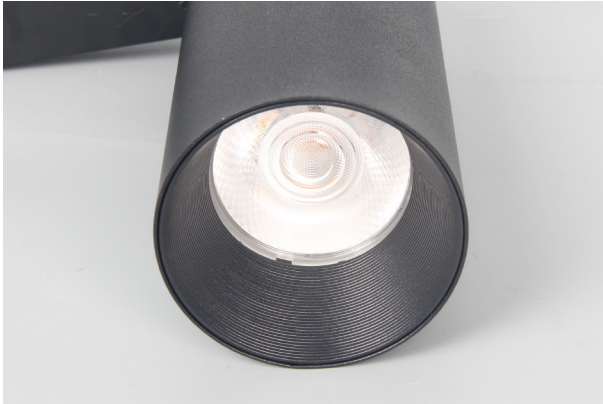


Description:
LED TRACK LIGHT


Main material:
Aluminium+PC

Specification
Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps High quality light, high color rendering, less heat, no UV or IR radiation LED driver is included IP20

Applications
. Shopping mall
. Office buildings
. Exhibition hall

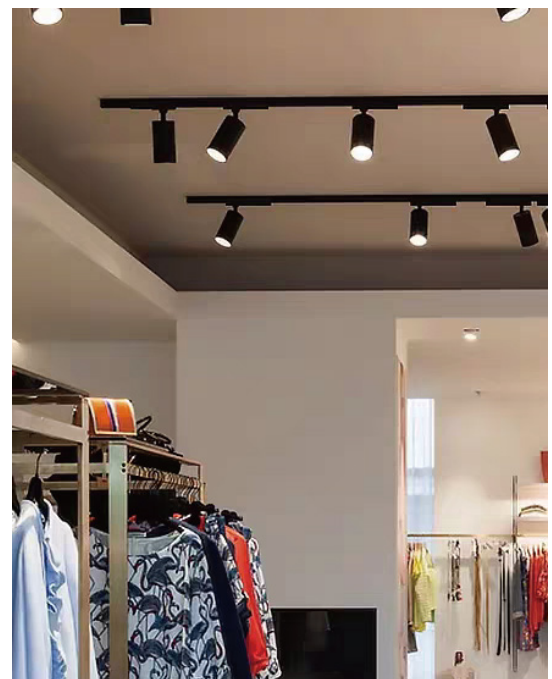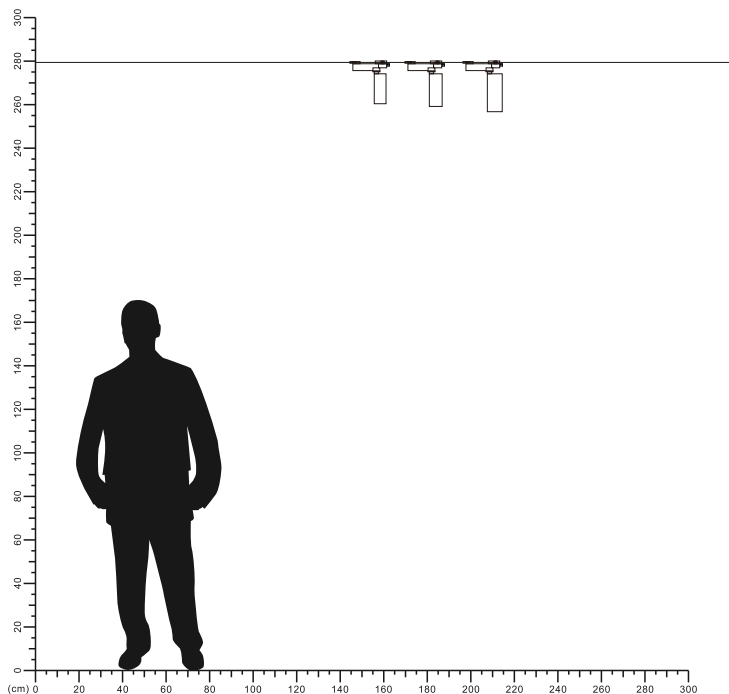


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

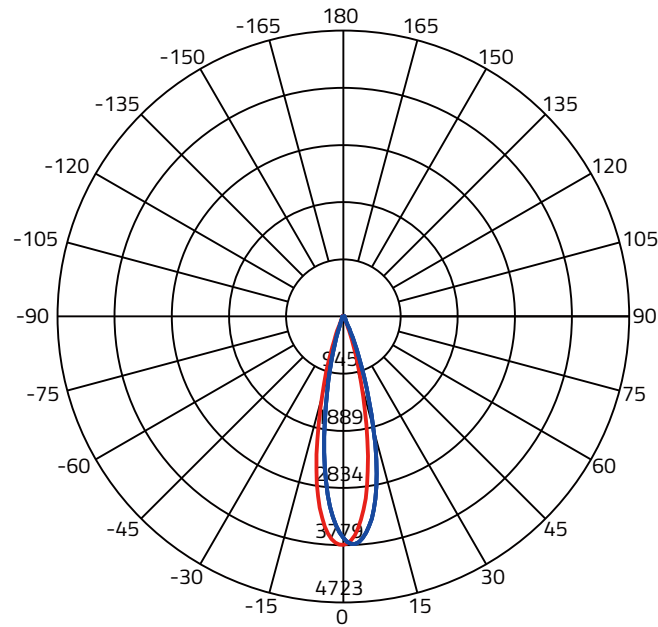


Beam Angle(50%) C0-180,C90-270: 24.5 deg,24.7 deg

C0-180 — C90-270 —

Illuminance at a Distance

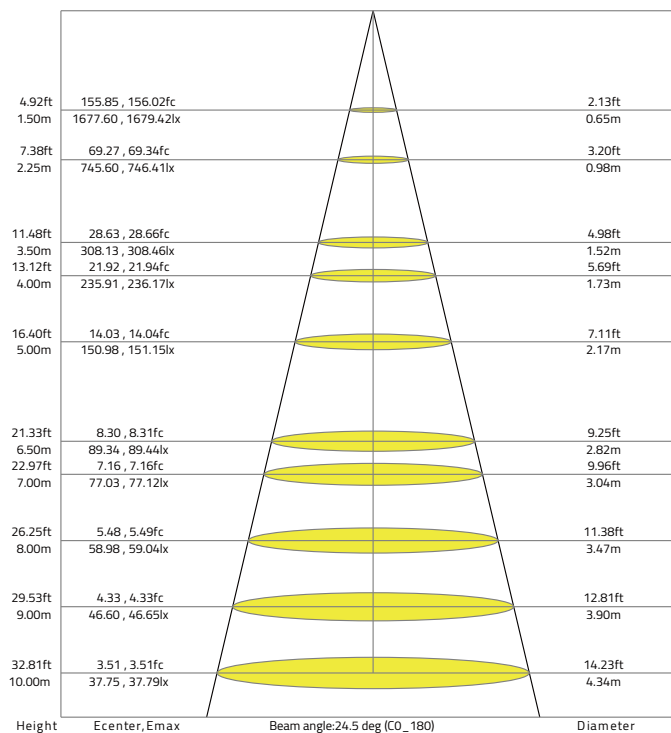


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

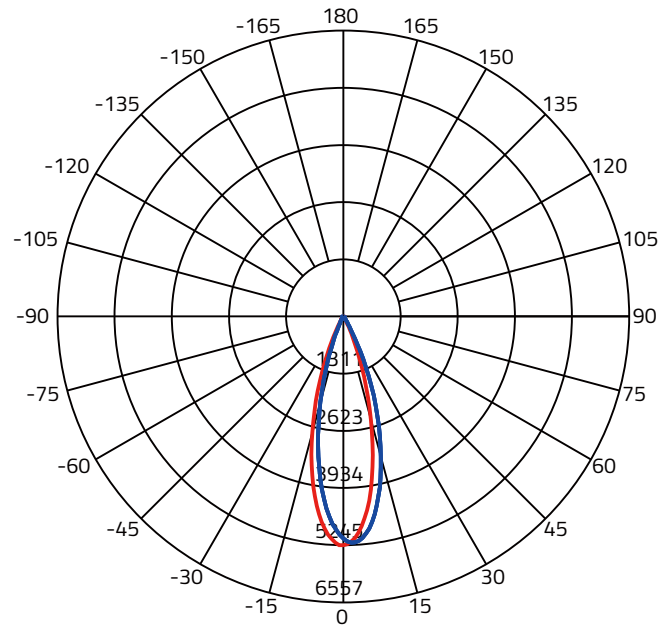


Beam Angle(50%) C0-180,C90-270: 29.9 deg,30.9 deg

C0-180 — C90-270 —

Illuminance at a Distance

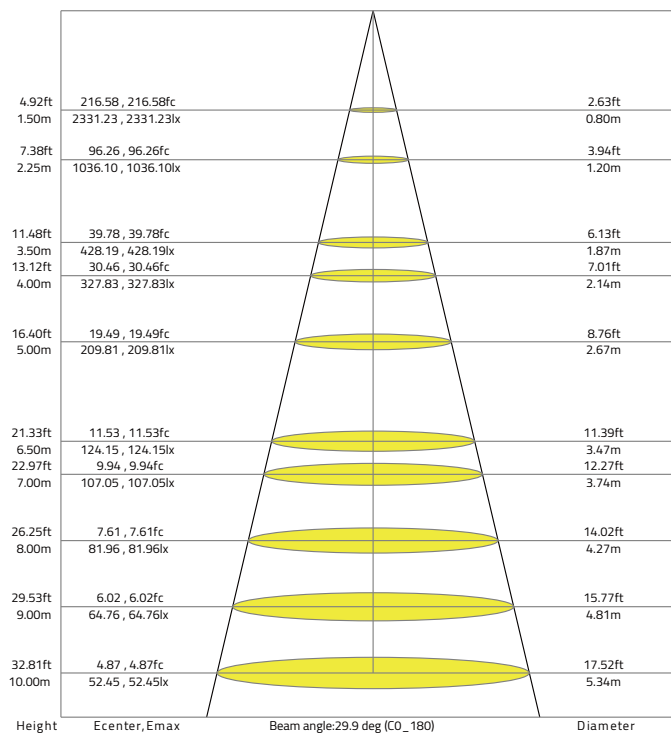


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

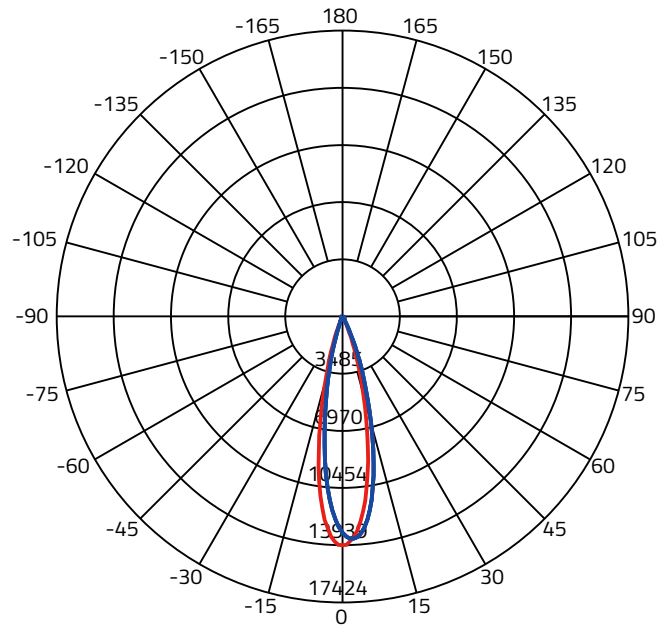


Beam Angle(50%) C0-180,C90-270: 23.8 deg,24.2 deg

C0-180 — C90-270 —

Illuminance at a Distance

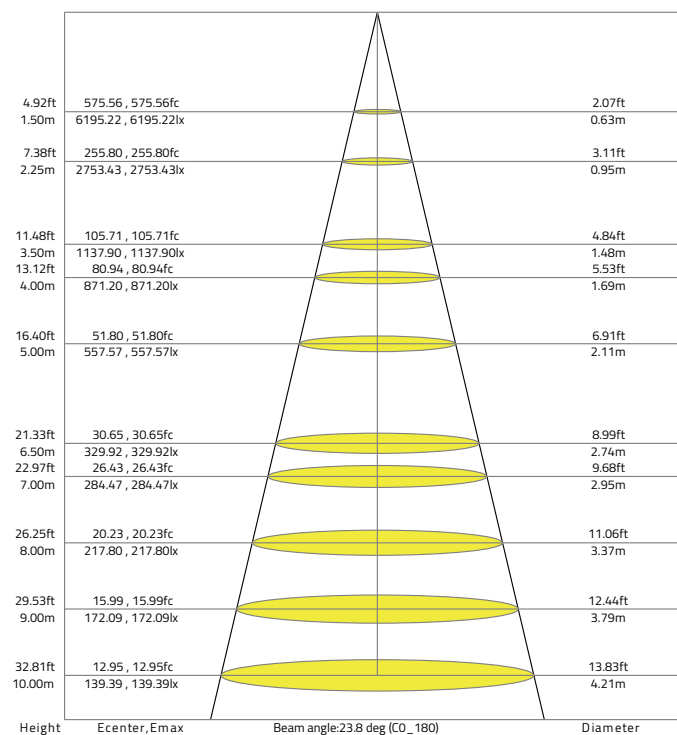


NR-TL0153-30-40K-WH-24D



1

Turn off The Power

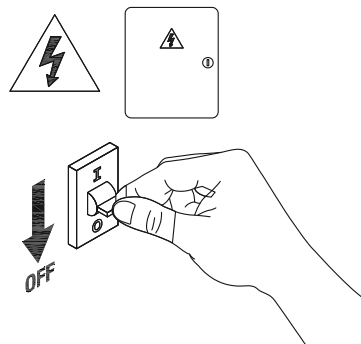

2

fix the track on your ceiling




3

Connect the cable




4

Put the lamp body into the track




5

Push the button to power on



6

installaion is complete



7

Turn on the power

