



LED TRACK LIGHT

NRP-TL Series
IP20



Model No	P (W)	CCT(K)	Output (lm)	Color	Dimensions in mm			
					A	B	C	
NRP-TL0151-10-30K-BK-24D	10	3000	710	Black	124	Φ63	187	0.35
NR-TL101-10 DW	10	4000	710	Black	124	Φ63	187	0.35
NRP-TL0151-10-30K-WH-24D	10	3000	710	White	124	Φ63	187	0.35
NRP-TL0151-10-40K-WH-24D	10	4000	710	White	124	Φ63	187	0.35
NRP-TL0151-20-30K-BK-24D	20	3000	1600	Black	146	Φ85	202	0.54
NRP-TL0152-20-40K-BK-24D	20	4000	1600	Black	146	Φ85	202	0.54
NRP-TL0151-20-30K-WH-24D	20	3000	1600	White	146	Φ85	202	0.54
NRP-TL0151-20-40K-WH-24D	20	4000	1600	White	146	Φ85	202	0.54
NR-TL102S-30 WW	30	3000	2220	Black	177	Φ95	230	0.73
NRP-TL0151-30-40K-BK-24D	30	4000	2220	Black	177	Φ95	230	0.73
NRP-TL0151-30-30K-WH-24D	30	3000	2220	White	177	Φ95	230	0.73
NRP-TL0151-30-40K-WH-24D	30	4000	2400	White	177	Φ95	230	0.73


Dimensions in mm



TrackKer


Model No	Color	Dimensions in mm			
		A	B	C	
NRP-TL110-1-M-W	White	1000	34	20	0.41
NRP-TL110-1-M-BK	Black	1000	34	20	0.41
NRP-TL110-2-M-W	White	2000	34	20	0.84
NRP-TL110-2-M-BK	Black	2000	34	20	0.84
NRP-TL110-3-M-W	White	3000	34	20	1.25
NRP-TL110-3-M-BK	Black	3000	34	20	1.25


Dimensions in mm

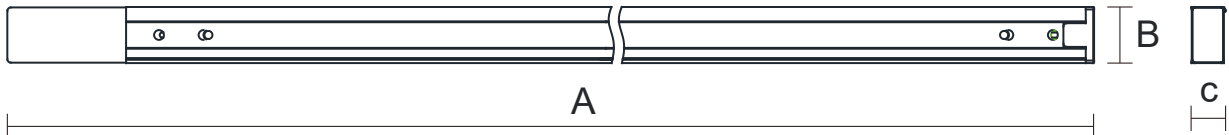
TrackKer Connect

Model No	Color	Dimensions in mm		
		A	B	
NRP-TL120-90-W	White	66	66	0.03
NRP-TL120-90-BK	Black	66	66	0.03
NRP-TL120-180-W	White	95	36	0.06
NRP-TL120-180-BK	Black	95	36	0.06
NRP-TL120-T-W	White	95	66	0.08
NRP-TL120-T-BK	Black	95	66	0.08
NRP-TL120-CROSS-W	White	95	95	0.10
NRP-TL120-CROSS-BK	Black	95	95	0.10

Dimensions in mm

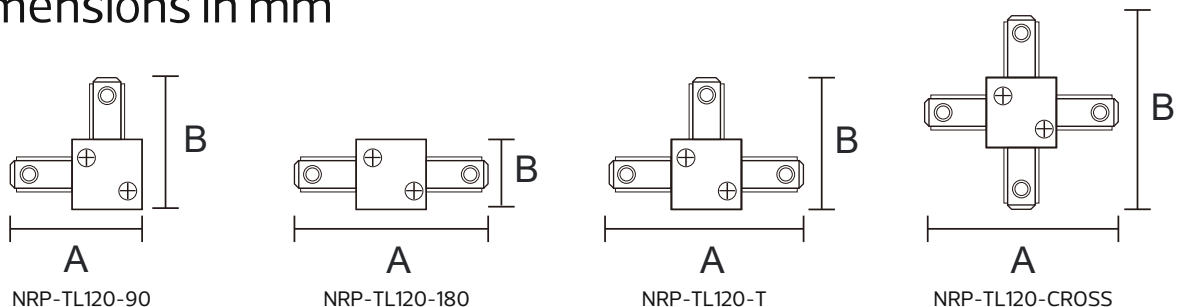

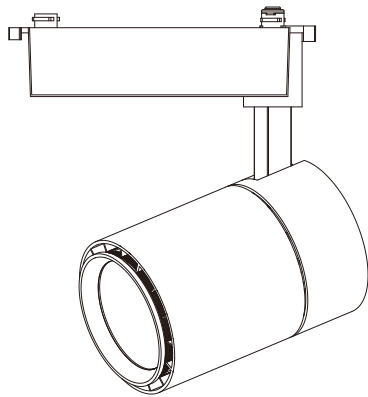

Description:
LED Track Light


Main material:
Aluminum+PC

Specification


Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
LED driver is included
IP20

Applications


- . Shopping mall
- . Office buildings
- . Exhibition hall

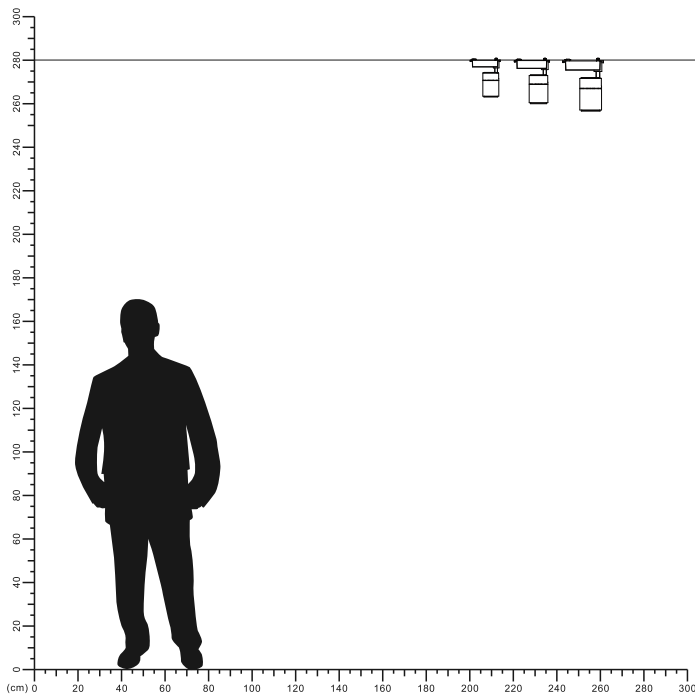

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

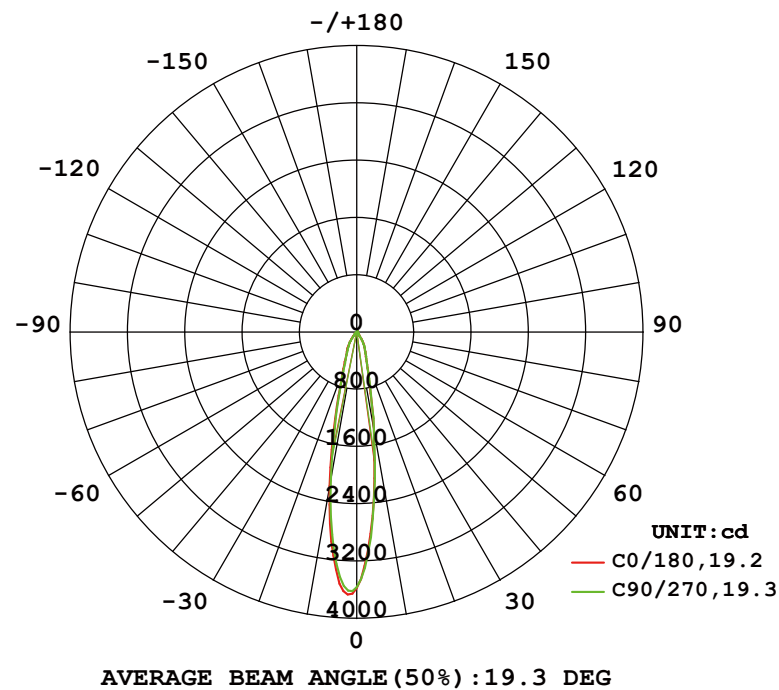


Illuminance at a Distance

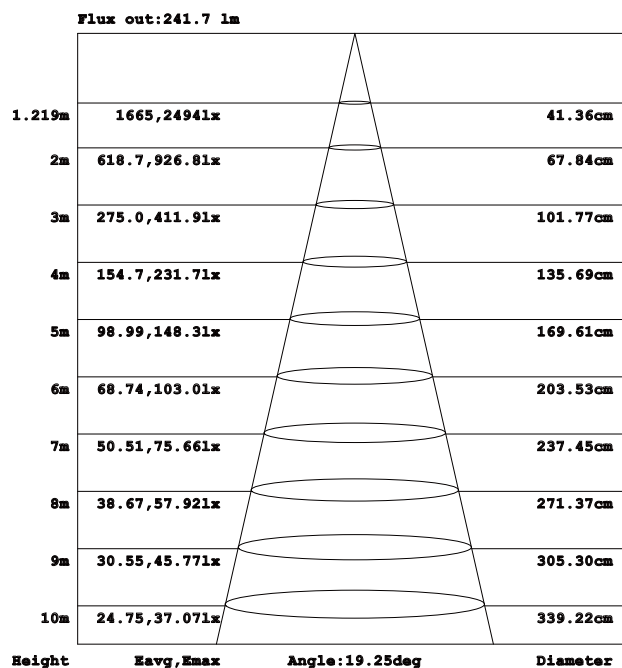


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

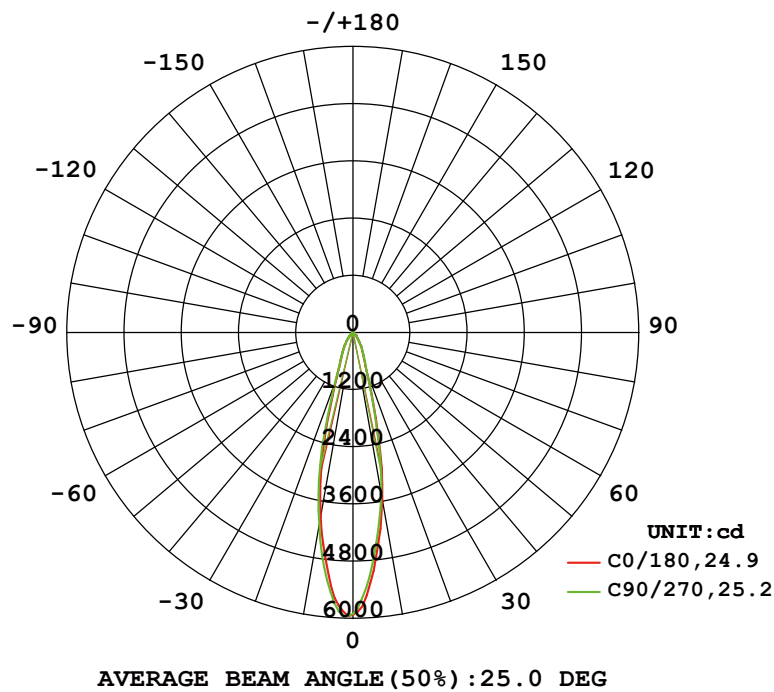


Illuminance at a Distance

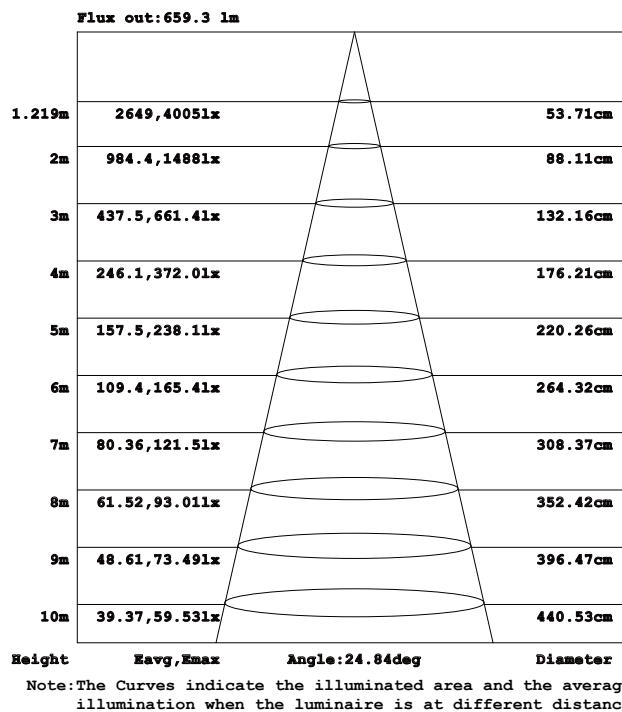


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

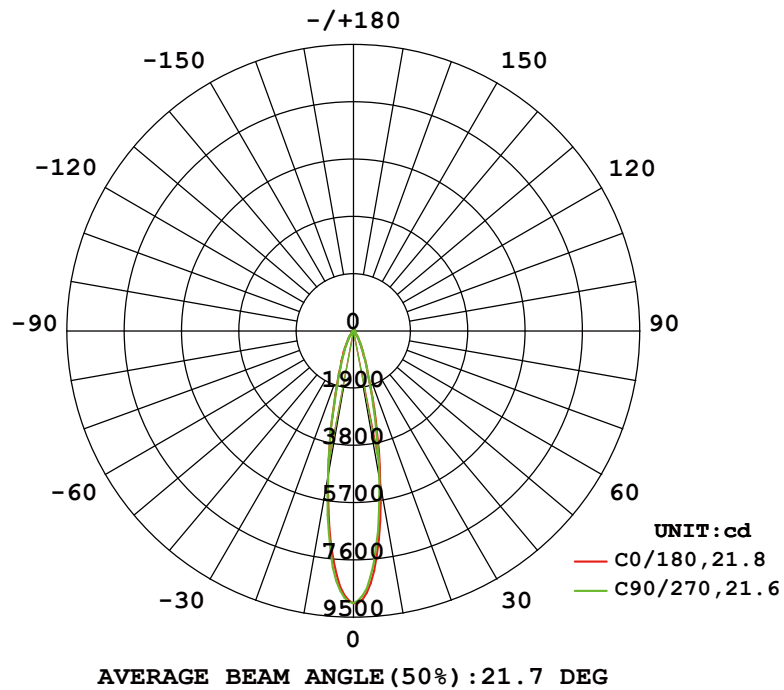


Illuminance at a Distance

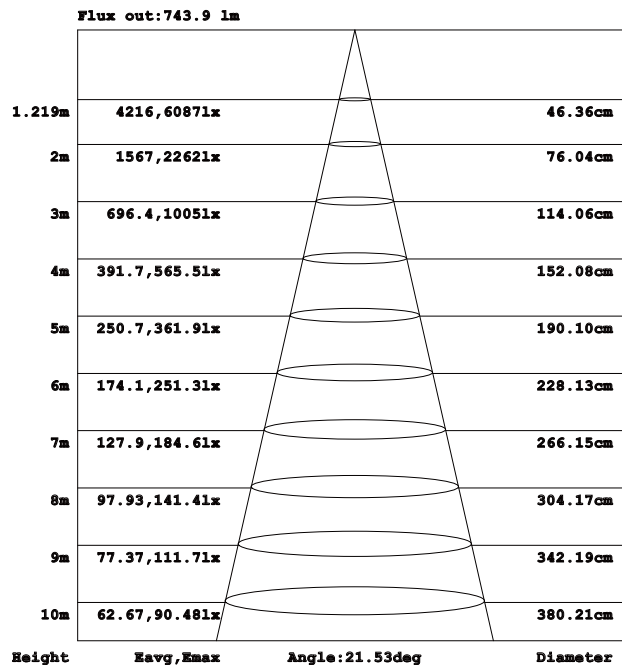

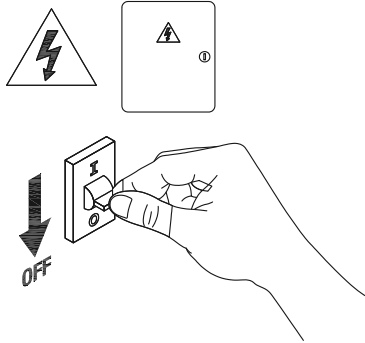


1

Turn off The Power



2

Drill 2 hole on your ceiling.

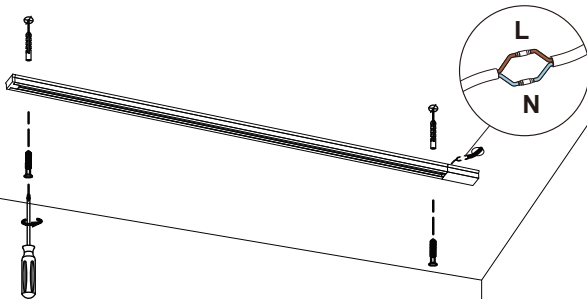


3

Install the track and connect the cable




4

Install the track light

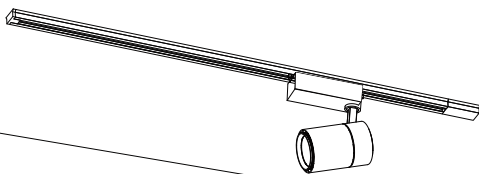

5

installaion is complete



6

Turn on the power

