





LED Neon Strip Light


NR-NE24-1010-9W Series
IP65

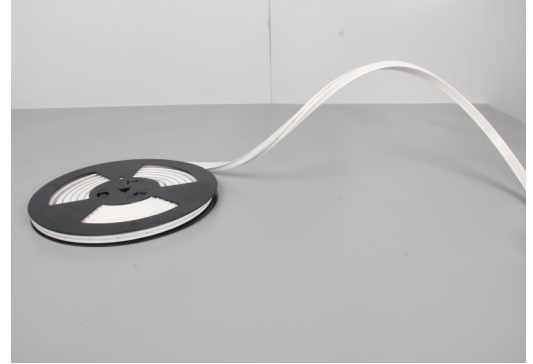

Item Code	Watt	CCT	Beam Angle	LM/M	M/PCS	Cutting	Hole Size (mm)	LED QTY
NR-NE24-1010-9W-3000K	9W/M	3000K	120°	594LM/M	5M/PCS	37mm	10*10	168Pcs
NR-NE24-1010-9W-4000K	9W/M	4000K	120°	594LM/M	5M/PCS	37mm	10*10	168Pcs

Dimensions in mm

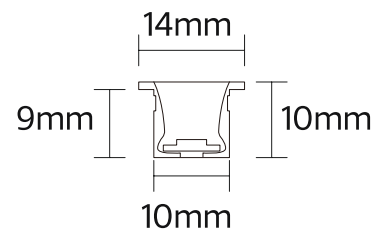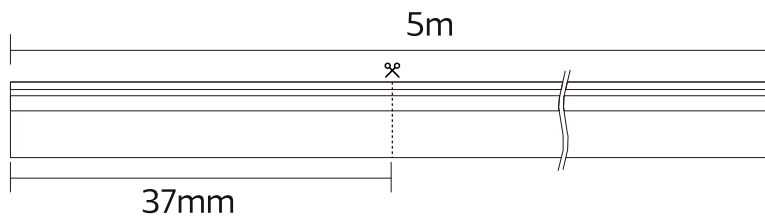

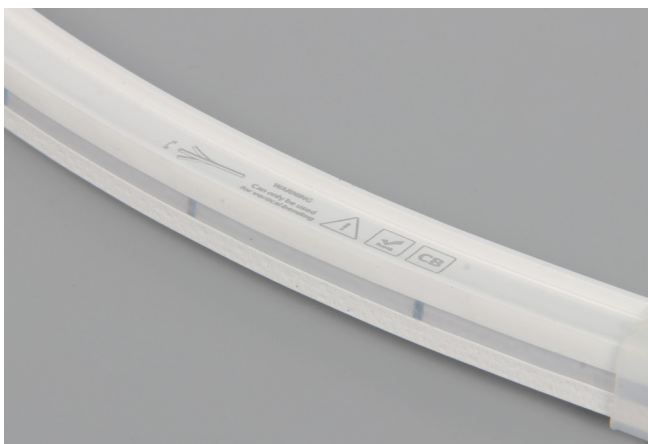

Description:

LED Neon Strip Light

Main material:


Silica gel

Specification:


Energy saving, up to 85% energy saving comparing to standard halogen and in candescent lamps Long life, up to 30,000 hours High quality light, High color rendering, less heat.

Applications


- .Signboard
- .The ceiling
- .Building external wall

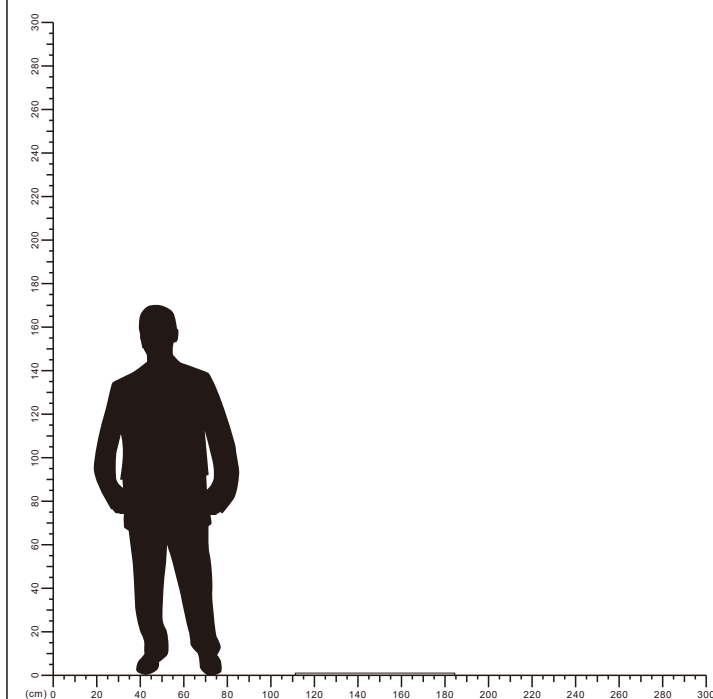

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

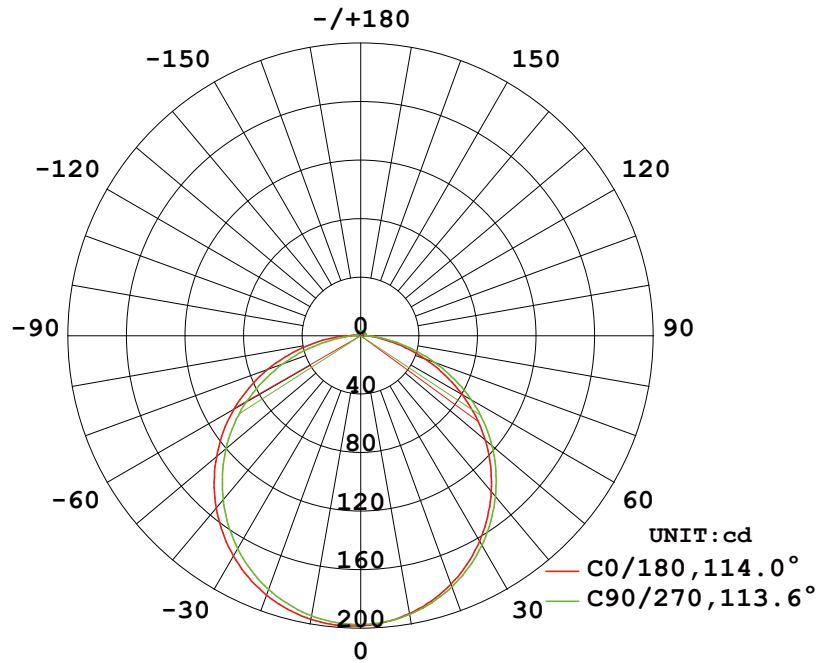





Illuminance at a Distance

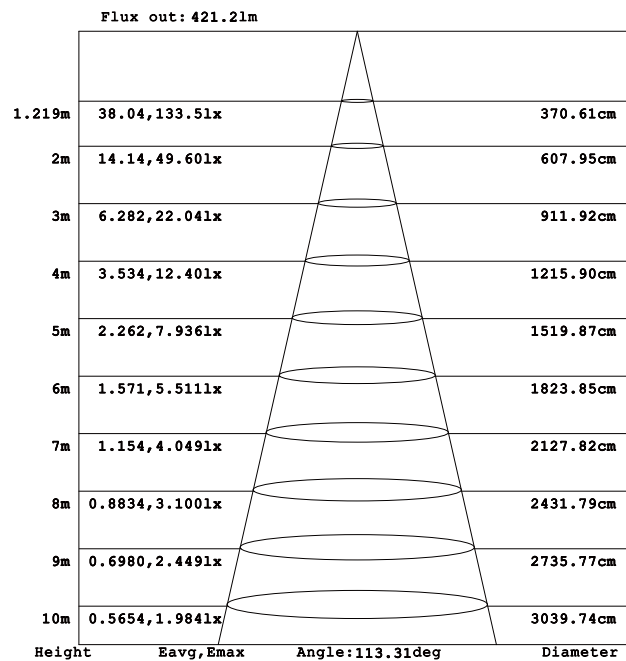

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

LED Strip Power Supply

NR-PS Series
IP20

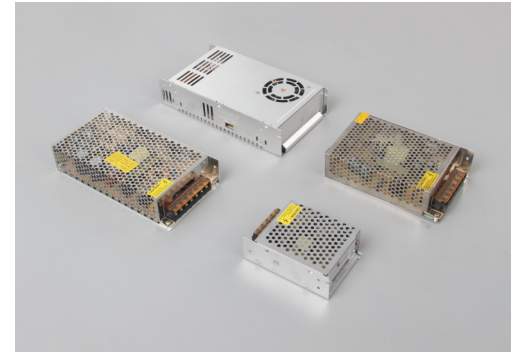


Item Code	P(W)	Input	Output Current	Dimensions in mm			
				A	B	C	
NR-PS-60W	60	AC100-240V 50/60Hz Max:0.6A	DC24V $\approx$ 2.5A Max	110	78	37	0.19
NR-PS-100W	100	AC100-240V 50/60Hz Max:1.0A	DC24V $\approx$ 4.25A Max	158	98	43	0.32
NR-PS-150W	150	AC100-240V 50/60Hz Max:1.5A	DC24V $\approx$ 6.2A Max	198	98	43	0.43
NR-PS-360W	360	AC100-240V 50/60Hz Max:3.6A	DC24V $\approx$ 15A Max	215	115	47	0.66


Accessories

Picture	Item Code	Size
	NRP-NE24-IP67-ONE-CONNECT (match strip light NRP-NE24-IP67-9W)	10*10
	NRP-NE24-IP67-CLIPS	10*10
	NRP-NE24-IP67-CLIPS-MOVE	10*10
	NRP-NE24-IP67-TOW-CAP	10*10

Face to the side surface (as the pictures shows),
the minimum bending radius is 60mm.



The product can only be bent vertically,
not horizontally.

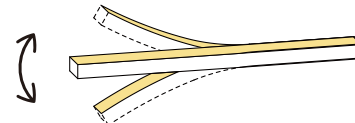

Luminous surface

