



## LED Neon Strip Light

NR-NE48-1312 Series  
IP65

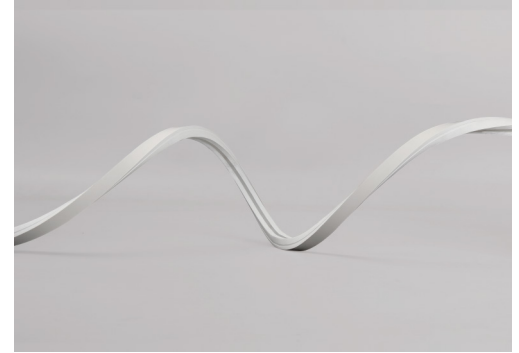

| Item Code       | Input Voltage | Watt | Ra  | Lm/M    | Cutting | LED QTY | LED Type | Beam Angle | IP   | CCT         |
|-----------------|---------------|------|-----|---------|---------|---------|----------|------------|------|-------------|
| NR-NE48-1312-5W | DC48V         | 5W/M | ≥97 | 250lm/m | 100mm   | 120Pcs  | SMD      | 120°       | IP65 | 3000K/4000K |
| NR-NE48-1312-9W | DC48V         | 9W/M | ≥97 | 450lm/m | 100mm   | 120Pcs  | SMD      | 120°       | IP65 | 3000K/4000K |

### Dimensions in mm

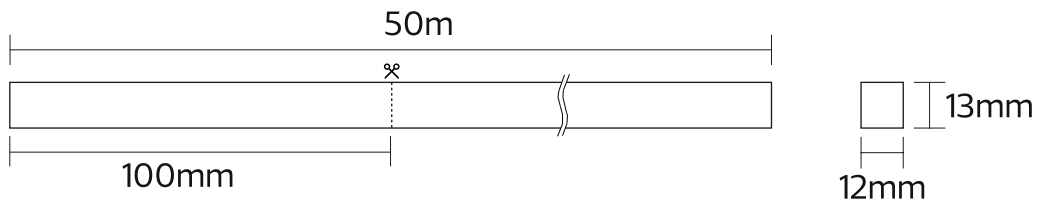



**Description:**

LED Neon Strip Light

**Main material:**


Silica gel

**Specification:**

Energy saving, up to 85% energy saving comparing to standard halogen and in candescent lamps Long life, up to 20,000 hours High quality light, High color rending, less heat.

**Applications**


- .Signboard
- .The ceiling
- .Building external wall

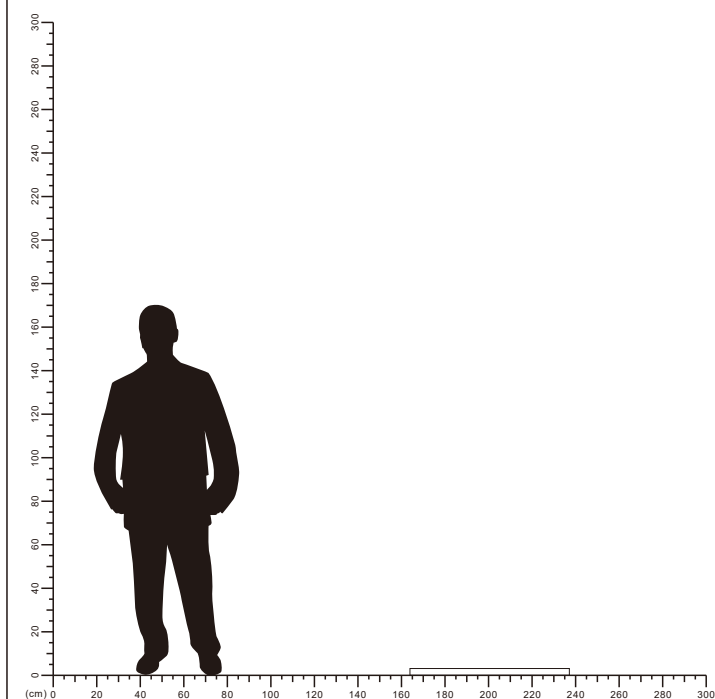


## Accessories

| Picture                                                                             | Item Code              | Size  |
|-------------------------------------------------------------------------------------|------------------------|-------|
|    | NR-NE48-1312-CONNECT   | 12*12 |
|    | NR-NE48-1312-CLIPS-MOV | 14*14 |
|   | NR-NE48-1312-CLIPS     | 12*12 |
|  | NR-NE48-1312-CAP       | 12*12 |

### POLAR AND CONE DIAGRAM

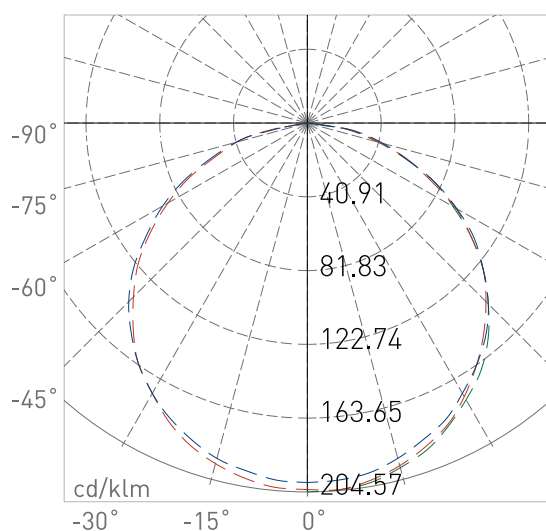

### PHOTOMETRIC OF 1M STRIP

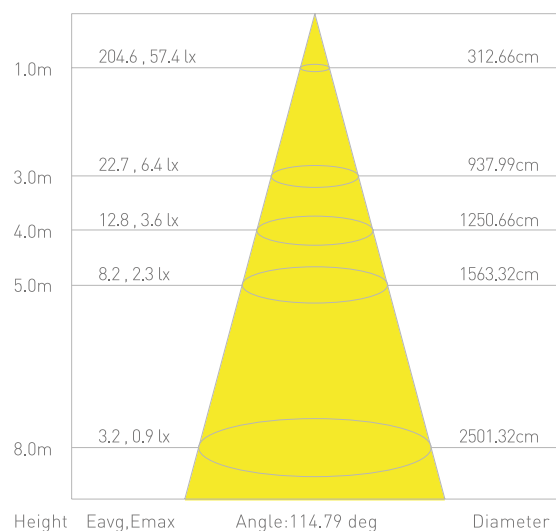

## LED Strip Power Supply

| Item Code                      | Input Voltage(AC) | Input Current(A) | Output Voltage(DC) | Output Current(A) | IP | Watt |
|--------------------------------|-------------------|------------------|--------------------|-------------------|----|------|
| NRP-PS102-FliKer-48V-150W-IP65 | 100-240V          | 1.5A             | 48V                | 3.2A              | 65 | 150  |
| NRP-PS102-FliKer-48V-300W-IP65 | 180-240V          | 1.67A            | 48V                | 6.25A             | 65 | 300  |
| NRP-PS102-FliKer-48V-400W-IP65 | 180-240V          | 2.2A             | 48V                | 8.33A             | 65 | 400  |



**NOTE:**the power supply should not exceed **80%** of the rated power for long periods of time!



NRP-PS102-FliKer-48V-150W-IP65




NRP-PS102-FliKer-48V-300W-IP65



NRP-PS102-FliKer-48V-400W-IP65

### Minimum bending radius and luminous surface.

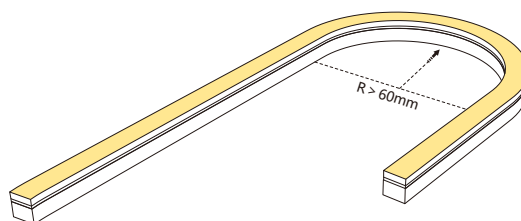

Luminous surface

