
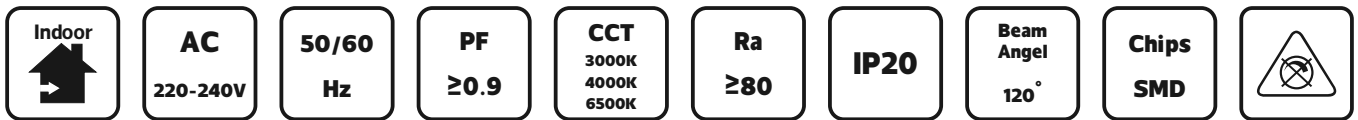



LED PANEL LIGHT

NR-PL102-50 Series
IP20

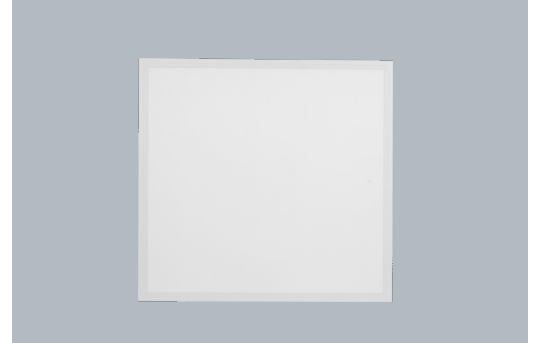

Item Code	P (W)	CCT(K)	Beam angle	Output (lm)	lm/w	Hole Size (mm)	Dimensions in mm			
							A	B	C	
NR-PL102-50-3000K	50	3000	120°	5150	107.2	□590x590	596	596	31	1.35
NR-PL102-50-4000K	50	4000	120°	5360	107.2	□590x590	596	596	31	1.35
NR-PL102-50-6500K	50	6500	120°	5150	107.2	□590x590	596	596	31	1.35

Dimensions in mm

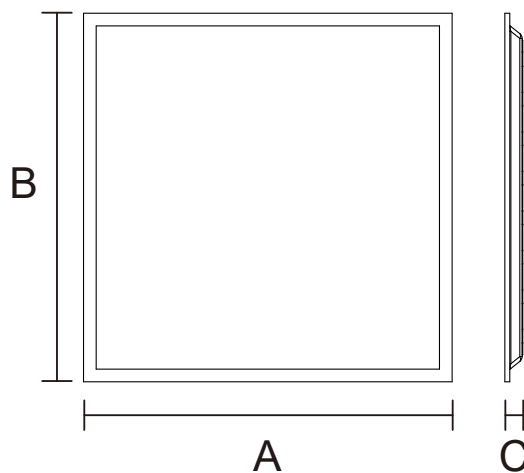

Accessory

Picture	Item Code
	NR-PL102-ACS
	NR-PL102-WIRE-ACS



Description:

LED PANEL LIGHT

Main material:



aluminium+Iron+Engineering plastics

Specification


Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
High quality light, high color rendering, less heat, no UV or IR radiation
LED driver is included
IP20

Applications

- . Shopping mall
- . Office buildings
- . Exhibition hall

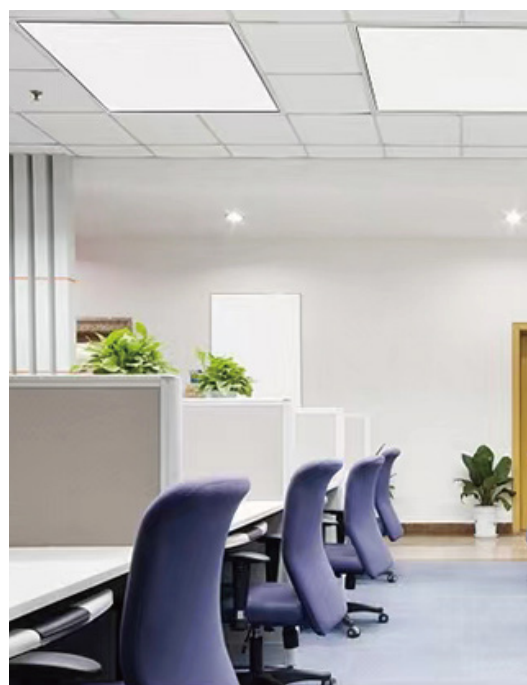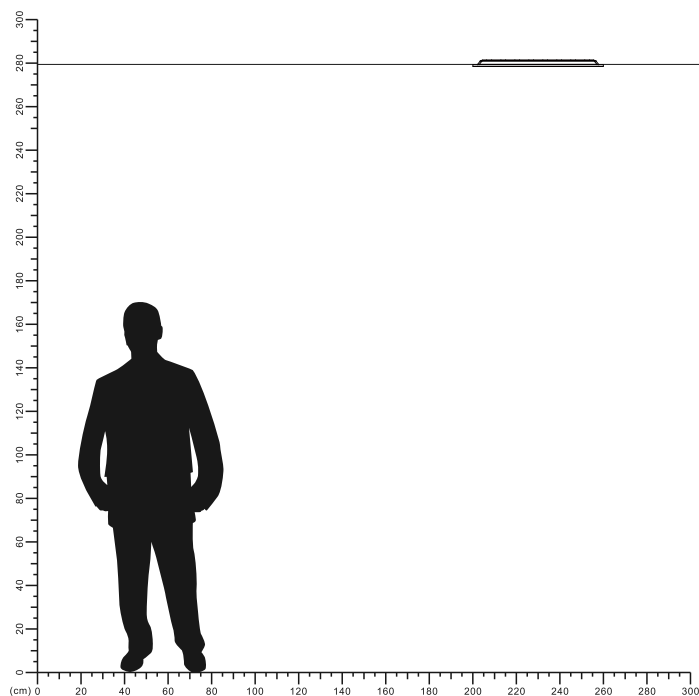




LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

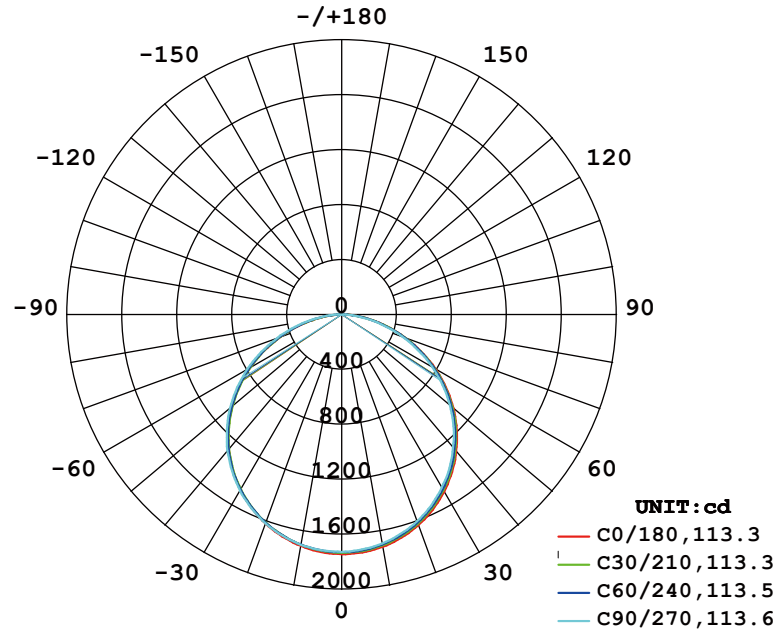

AVERAGE BEAM ANGLE (50%) : 113.4 DEG

Illuminance at a Distance

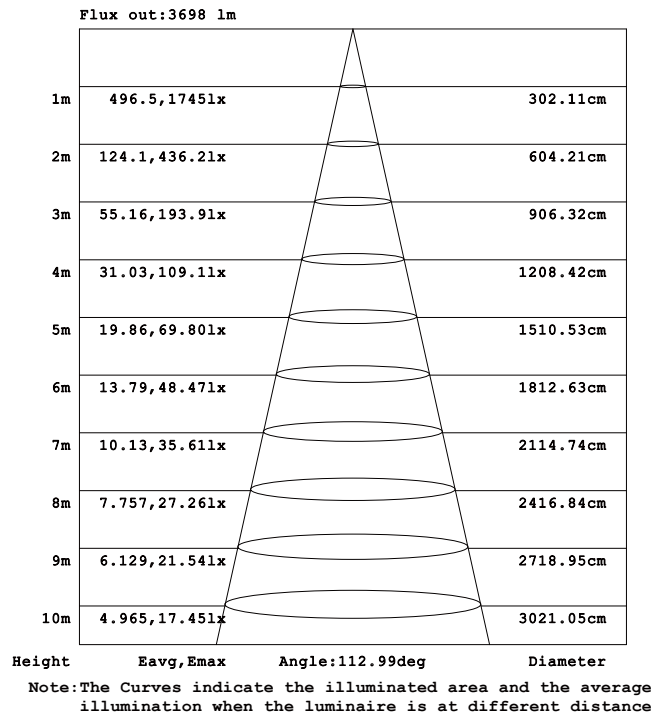

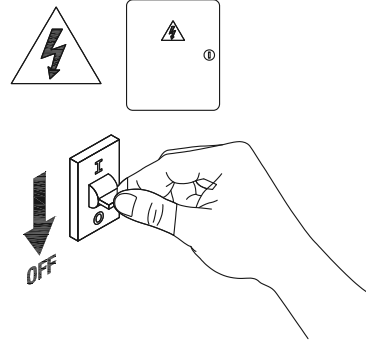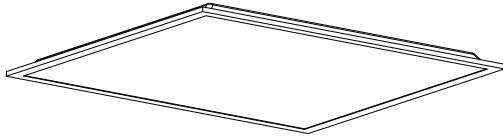


1

Turn off The Power




2

Hole: Ensure your Ceiling hole size about 590x590mm.

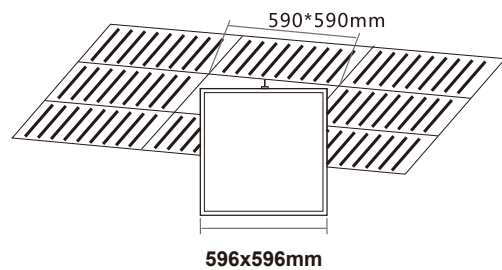


3

Ensure the panel light working well before installation, put the panel light at a diagonal position.

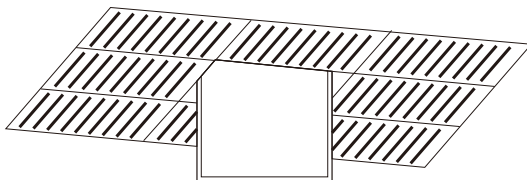


4

Put the LED driver aside and insert panel light into ceiling.

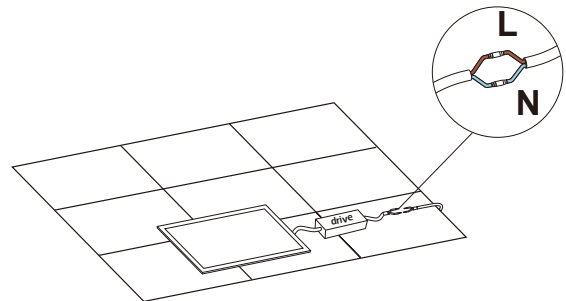


5

Connect the cable

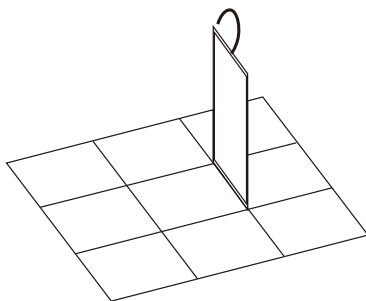


6


Rotate the panel light 90° in vertical direction of about 90° to make it correspond to the recessed frame and front of panel face to ground




7

Turn on the power

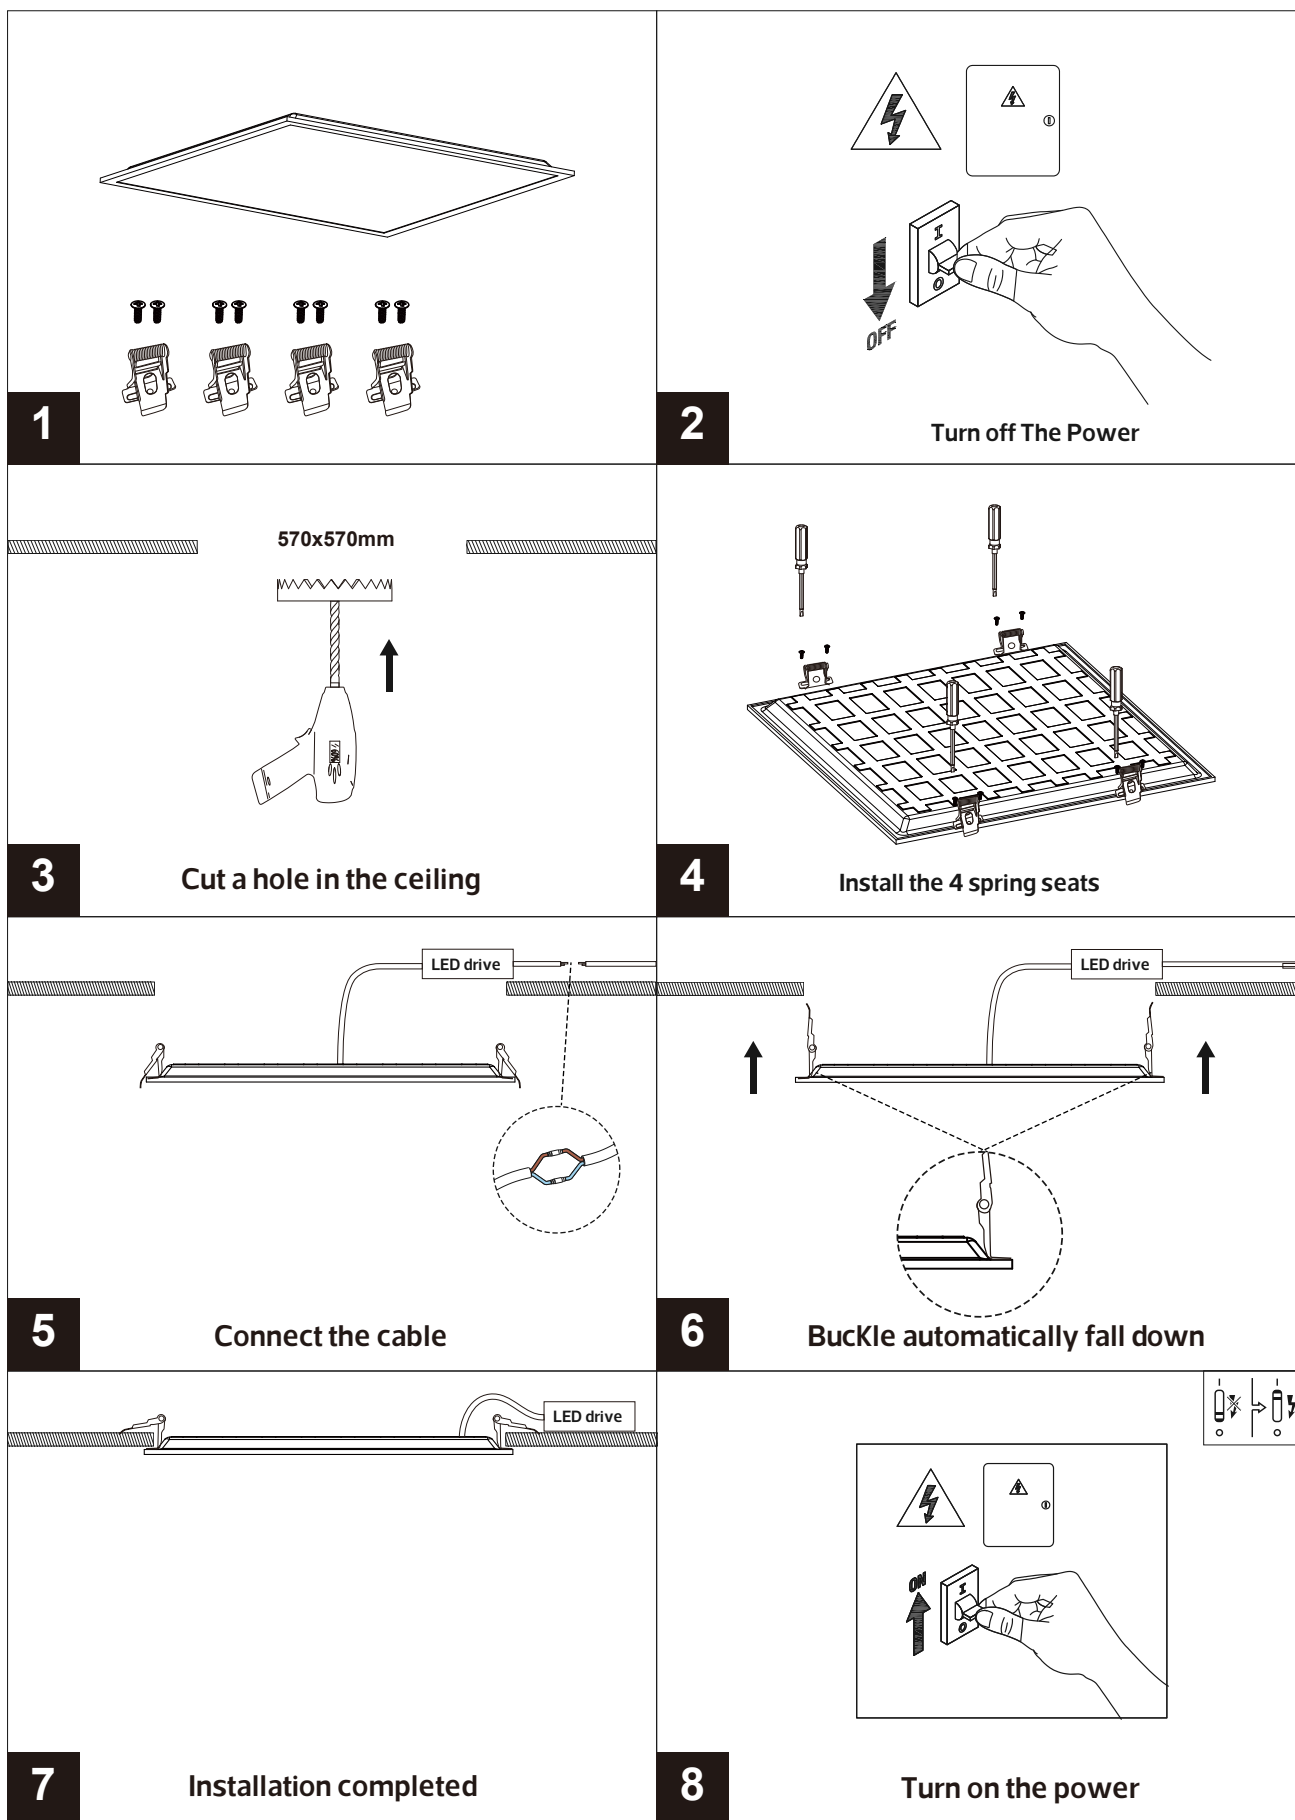

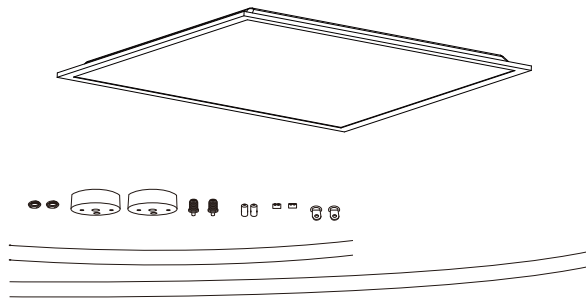


1

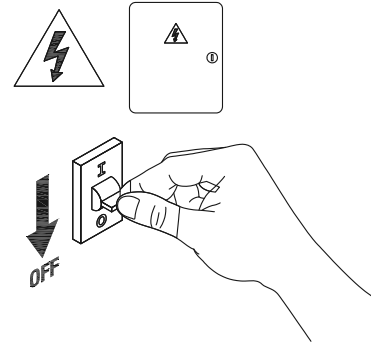


2

Turn off The Power

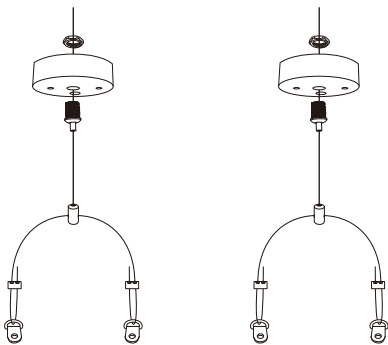


3

Install the suspension rope accessories properly




4

Fix the suspension rope to the lamp body

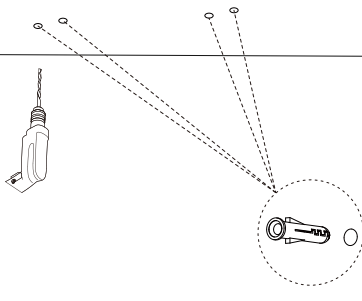


5

Drill 4 holes in the ceiling and insert expansion screws

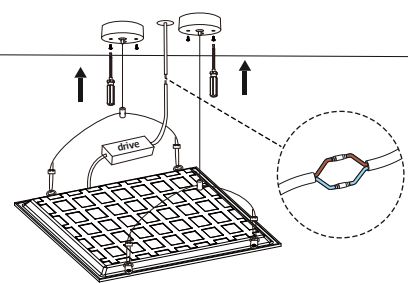


6

Fix the lamp body and Connect the cable



7

Installation completed



8

Turn on the power

