

Blinds Chain Motor Controller



AC
100-240V

50/60
Hz

IP20

Wi-Fi
433.92MHz
2.4 GHz

Working
Temperature
0°C~40°C

Working
Humidity
25%~90%RH

Torque
1.35N.m


Speed
55rpm

Maximum
Size
8ft (2.5m)
12ft (3.5m)

Maximum
Weight
22lbs(10kg)

Item Code	Battery Capacity	Dimensions in mm			 Kg
		L	W	H	
MS-CC101-WH	12V/1200mAH	46	42	160	0.19


Dimensions in mm

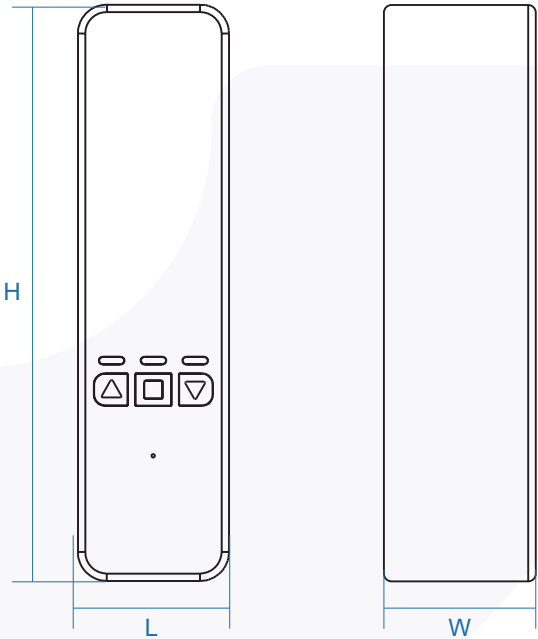

Open Motor and Choose Blinds Direction

- 1. Open Motor:** The motor will open when slide mini button.
- 2. Chain Position:** **Left Direction:** Facing blinds, Chain/Rope on Left hand.
Right Direction: Facing blinds, Chain/Rope on Right hand.
- 3.** Surface up, slide mini button to left or right. Light shine; (Also can setting direction on App more fuction).




Note: Please move carefully for mini button, to avoid Break.

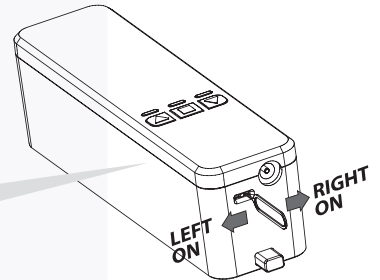

Character

- 1.** No change of existing blinds, no tubular motor. One touch, manual to moror.
- 2. Wi-Fi connector:** work with Google Home, Alexa Amazon, etc directly.
- 3. Schedule:** Setting open and close time as your like, open when sun rise, and close when sunset.
- 4. Long distance:** Open or close your home blinds on your office or business with Wi-Fi on.
- 5. Easy mounting and setting:** 5-3 minutes DIY on your fingertip position.
- 6. Control:** Mobile and remote both can.

COMPATIBLE CORDS/CHAINS



2 mm



4 mm



6 mm



4.5 x 6



4.5 x 12



Metal
Chain



Beaded




3.2 mm

Download Huem App

1. Search the App "Huem" from Apple Store or Google Play.



2. Scan the QR code from the label or user manual.

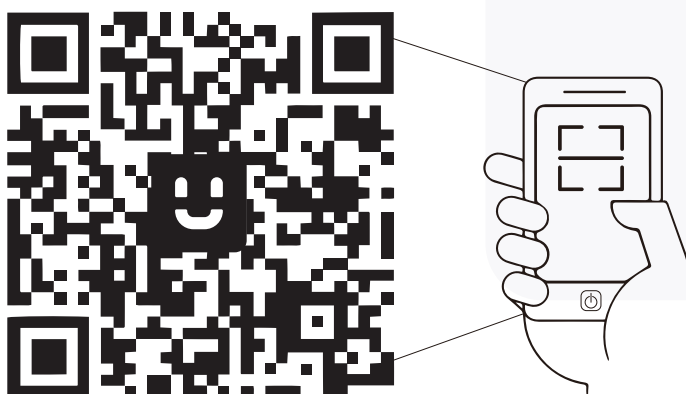



Android
5.0

iOS 10.0


The App is compatible with Android 5.0 and iOS 10.0 and higher version.

Log in / Register App

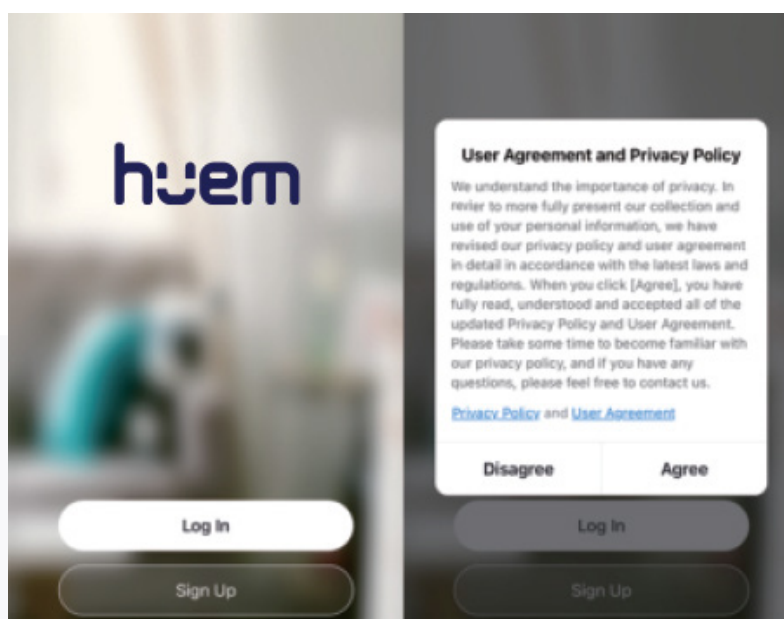


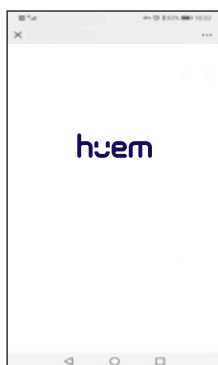


Open **"Huem"** App

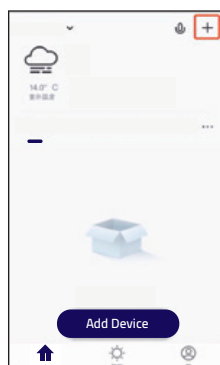


Press **"Add Device"** or **"+"** on upper right corner

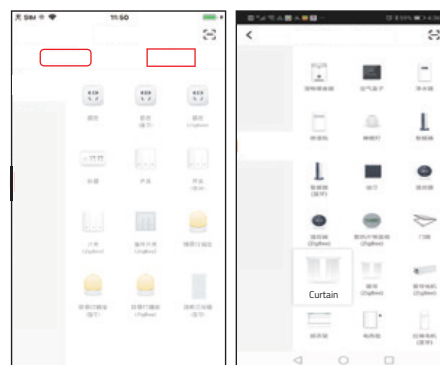


Choose **"Small home appliance"-Curtain**

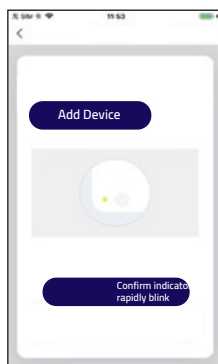

Mobile **Confirm indicator rapidly blink**.




Long press **"up"** and **"stop"** together 6 seconds, until **"blue light"** shining, point mobile **"confirm indicator rapidly blink"** input your Wi-Fi address and password.

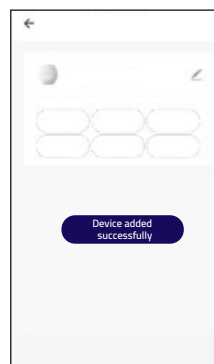

Note:


The phone will not respond to the drive after the connector, it will respond after **Step 4:TRIP SETTING**.

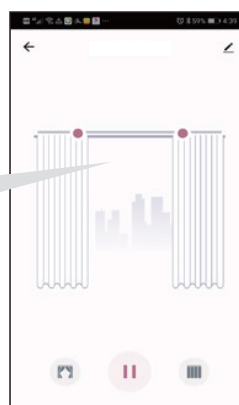

Mounting

1

Pull down the blinds to the similar mounting position, put card on the bottom of chain, tight chain, according the chain position, mark "L" or "R" on hole, put mounting bracket on card's position, (please note card outside of the bottom bar).




2

Installation mode 1:
3M Adhesive, advice 3M use after 12 hours.




3

Installation mode 2:
The whole on mounting bracket aligned marked position, fix screw on the hole; two position for choose.




4

Press upback board outside, put suitable gear on, take chain around gear, close upback board.




5

Tight chain on the motor, put motor slide groove down, until motor tight on groove, please choose suitable chain tension for stable running.




Note: Please be sure use the suitable gear for the chain, and adjust the tension, otherwise will noisy.


Trip Setting




Press "up" or "down" to required high limit position




High limit position (for ref)



Long press "stop" button 5 seconds until red light flash



Press down button and blinds run to the required low position



Press stop button, trip setting finish. (Can also setting from low limit position to high limit position)

Note: If trip change for some urgent, please reset.

Function Setting

1. Schedule: Can setting time as you like, Open when sunrise and close when sunset.

Step 2:



Device added successfully → More → Schedule

2. Connector with Google, Alexa, etc


hüem → Welcome home → me → more service →
Alexa, Google assistant, Roborock

page 3 of 3


3. Work not only with mobile, but also with remote.

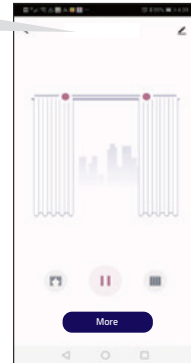

Long press "stop"
button 7 seconds
until red light flash




Press "up" or
"down" button,
each one is ok



Green, blue light on
"up" "down" button
will flash automatically
twice, remote built
connector with motor

Recover Factory Setting & Product Take Out

Please long press "up"
"down" button together
8 seconds, recover
factory setting.



Top up the projection on
bottom, slide upon
groove, open upback
board and take out chain

