

Wireless Wi-Fi Camera



Sensor
1/3" Full HD
CMOS

**Camera
Pixels**
2MP
(1920*1080)

**Operate
System**
Lite OS

Len
3.6mm

**Infrared
Light**
850nm-8M

Illuminance
Color 1Lux
Night 0Lux

Noise
≥52dB


WiFi
IEEE802.11b/
g/n 2.4G

**PIR Detect
Distance**
0-10m

**PIR Detect
Angle**
120°


Item Code	SD Card	Battery Capacity	Application	Working Temperature	Working Humidity	
MS-CAM104-WH	Max 128GB	4*18650 lithium batteries Total 10400mAh	Huem For Android & ios	-10℃ ~+50℃	≤80%RH	0.65

Dimensions in mm

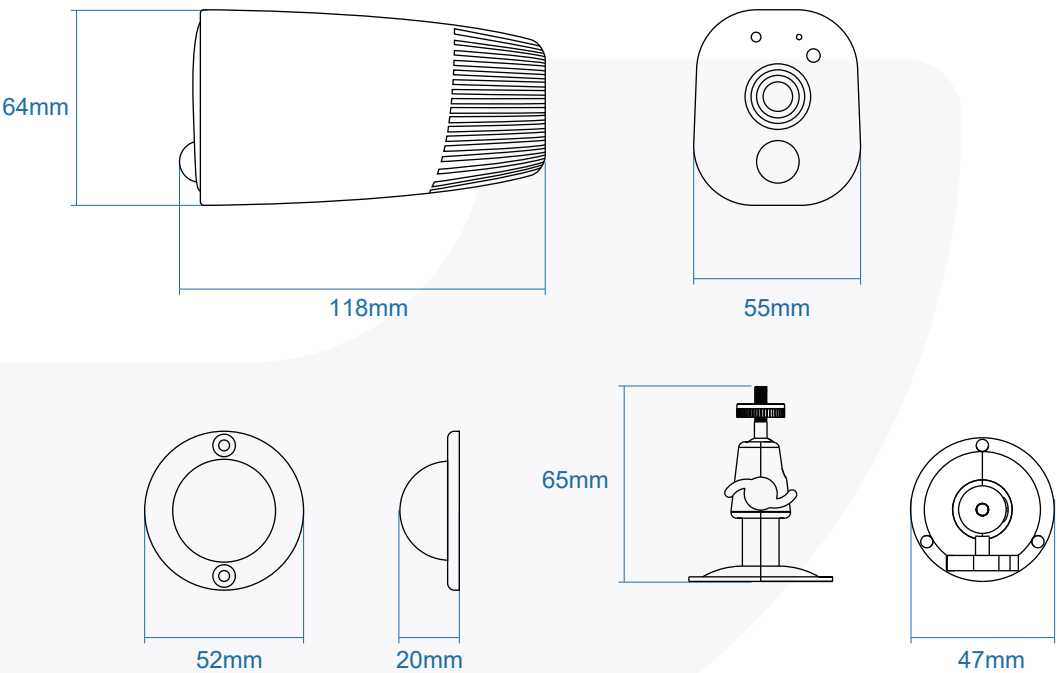


Packing List

Please consult below checklist for all the components.

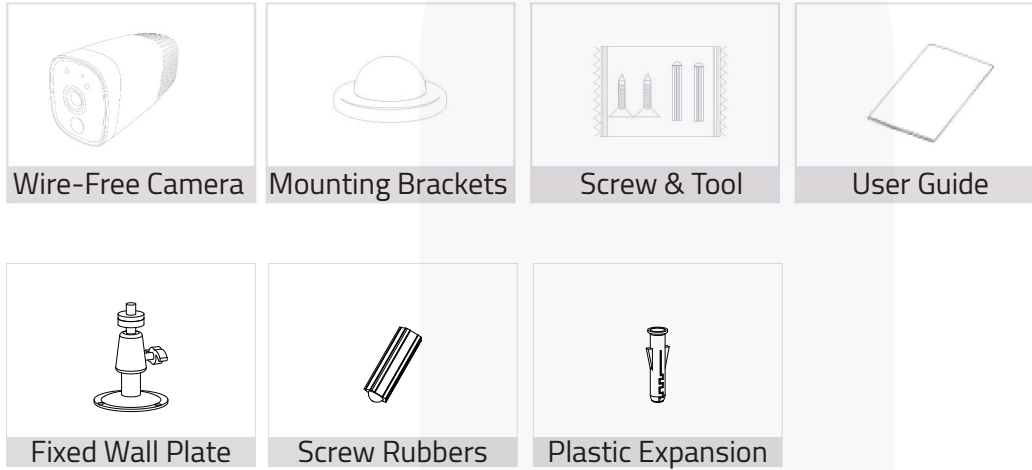

Product Drawing

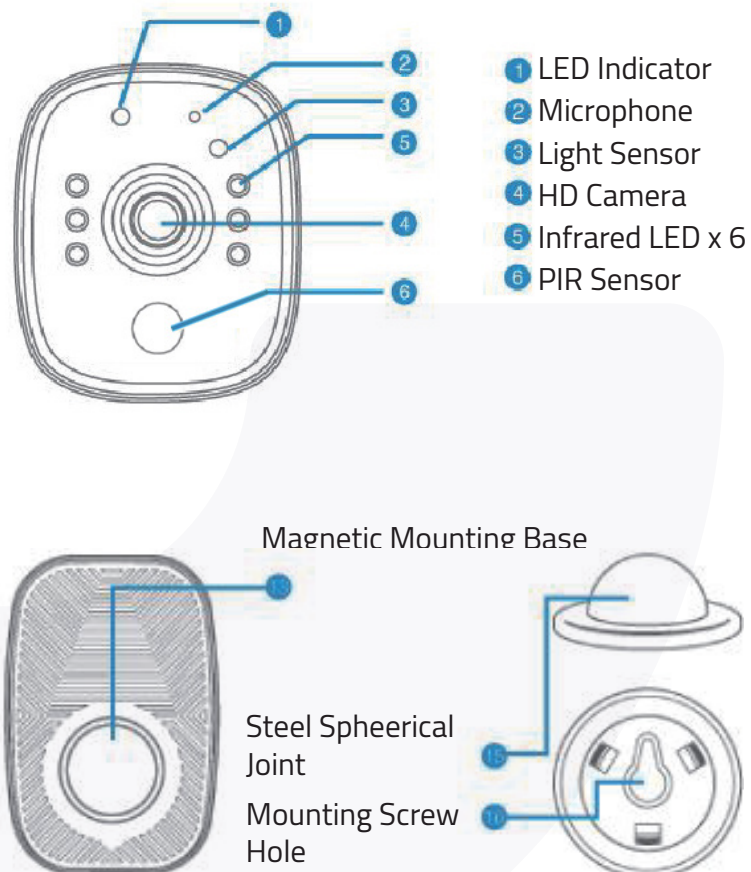


Video Management

-Playback video


Micro SD card recording type: APP wakes up the device and take video; Press home button and take video; PIR motion detection wake up and take video.

Note: The device only supports memory cards in FAT32 format, others cannot be recognized.

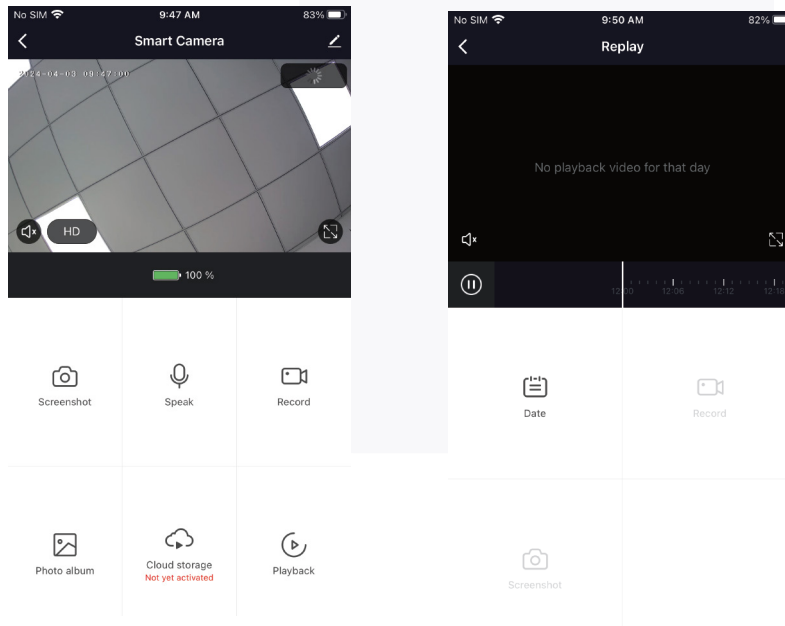

Device management

Click the appropriate device in the device list to watch the video directly in real time. You can click""..." in the upper right corner to enter the device settings.

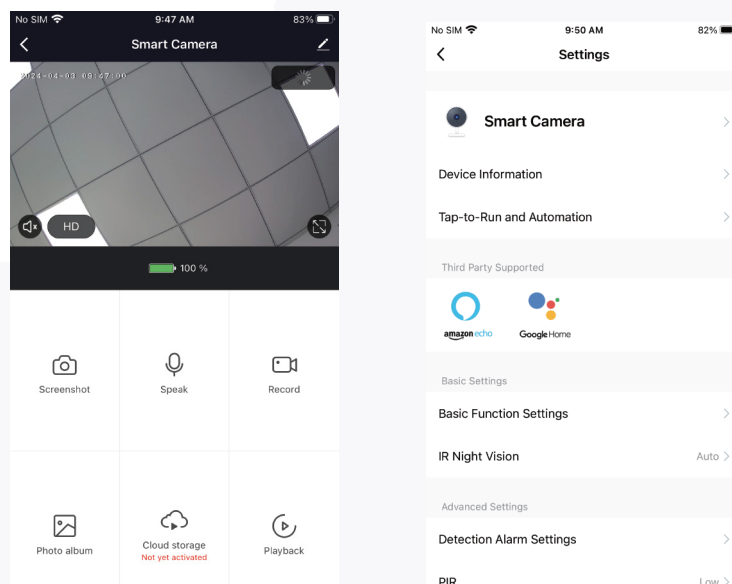

-Device information

Click "Device information" to check the device information.

-Share Device

Click "Share Device" to share the device to other family members.

-Basic function settingsClick "Basic function settings", to set below functions: Flip Screen: on/offTime Watermark: on/off; Talk Mode: One-Way Communication/Two-wayCommunication;Anti-Flicker: on/off/50Hz/60Hz.

-Working ModePower Saving: The device only works when the PIR sensor triggered. The device canlast for a long time in this mode.
Continuous: The device will continue to work until the battery runs out.

-PIR sensitivity settingClick "PIR" to set the sensitivity. PIR: Off/Low/Medium/High Off: Close PIR function.

*Low: Wake up device and record footage if any motion before the device is detected formore than 7 seconds. Notifications will be sent to mobile devices at the same time.

*Medium: Wake up device and record footage if any motion before the device is detected formore than 5 seconds. Notifications will be sent to mobile devices at the same time.

*High: Wake up device and record footage if any motion before the device is detected for more than 1 second. Notifications will be sent to mobile devices at the same time.

-Power Management SettingsClick "Power Management Settings" to check the power working status or set the lowbattery alarm threshold.Option:10%-30%.

-Storage SettingsDisplay the memory card capacity and format memory card interface.

-Share Device

Click "Share Device" to share the device to other family members.